


SHRUBS TO BE REMOVED / SALVAGED

TREE PROTECTION

EXISTING SHRUB BED TO REMAIN, PROTECT IN PLACE

LIMITS OF WORK



nowell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements ritical to providing Access for Disabled
Persons. Contractor shall provide verification
and certification of Compliance with the
applicable accessibility regulations.

DEMOLITION NOTES

- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY,
- STATE OF OKLAHOMA, AND NATIONAL CODES AND ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD LOCATIONS OF UNDERGROUND UTILITIES ON THESE FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS.
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- . DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



AFRICA-THEMED SAVANNAH **EXHIBITS** Oklahoma City,


ORIENTATION

PLAZA AND

SCHEMATIC DESIGN SERVICES - TASK 1A

LANDSCAPE DEMOLITION KEY PLAN

01/28/2020 RWR PGAV CLIENT OKCZOO SHEET NUMBER

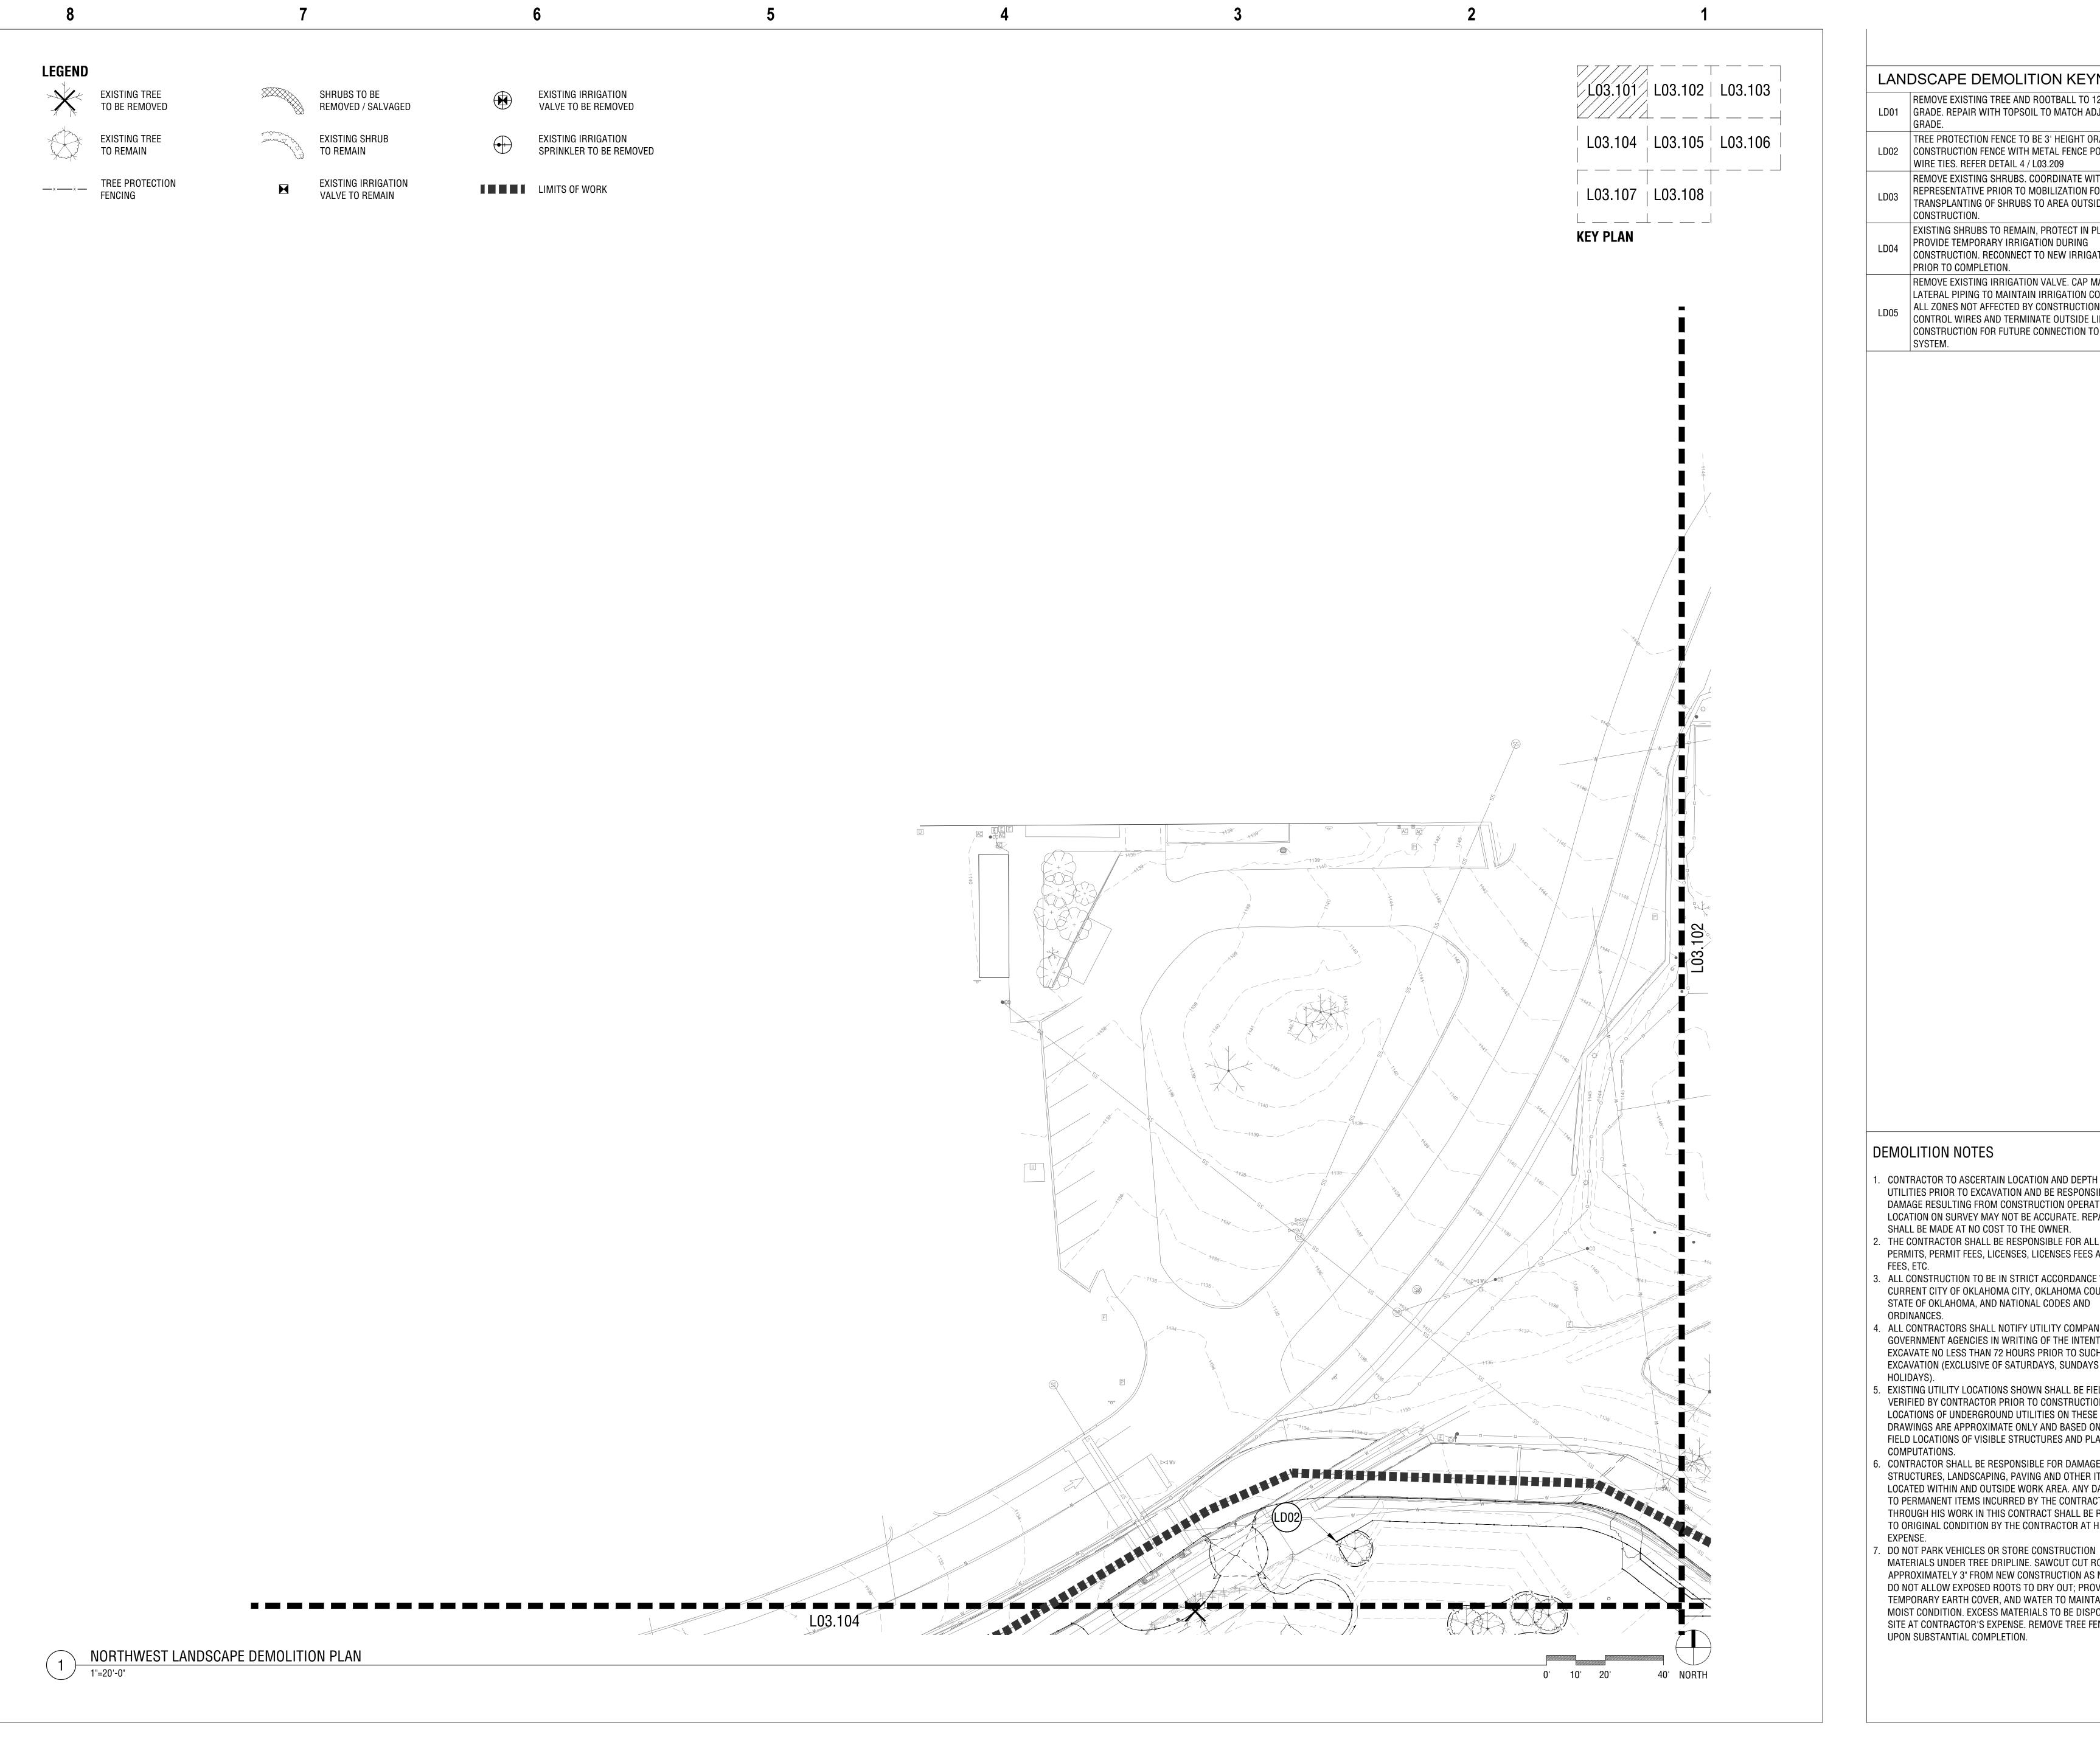

- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND
 - WIRE TIES. REFER DETAIL 4 / L03.209 REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL
 - TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION. EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE.
 - PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
 - REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOR ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONTROL WIRES AND TERMINATE OUTSIDE LIMITS OF CONSTRUCTION FOR FUTURE CONNECTION TO NEW SYSTEM.





Landscape Architects nowell&vancuren 601 South Lewis Avenue Tulsa, Oklahoma 74104

918.592.1270 phone

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

DEMOLITION NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM CONSTRUCTION OPERATIONS. LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH
- CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY, STATE OF OKLAHOMA, AND NATIONAL CODES AND ORDINANCES. . ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND HOLIDAYS).
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE DRAWINGS ARE APPROXIMATE ONLY AND BASED ON ACTUAL FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS.
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN EXPENSE.
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



PLAZA AND **AFRICA-THEMED** SAVANNAH **EXHIBITS** Oklahoma City,

Z00

ORIENTATION

SCHEMATIC DESIGN SERVICES - TASK 1A


> NORTHWEST LANDSCAPE DEMOLITION PLAN 01/28/2020

PGAV 77022-00 CLIENT SHEET NUMBER



- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE
 - LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND WIRE TIES. REFER DETAIL 4 / L03.209 REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S
 - REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.
 - EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
 - REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOR ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONTROL WIRES AND TERMINATE OUTSIDE LIMITS OF CONSTRUCTION FOR FUTURE CONNECTION TO NEW





howell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Landscape Architects

This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY,
- STATE OF OKLAHOMA, AND NATIONAL CODES AND . ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH
- EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE
- FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS. 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL
- STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN DO NOT PARK VEHICLES OR STORE CONSTRUCTION
- MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



Z00

ORIENTATION

PLAZA AND **AFRICA-THEMED** SAVANNAH **EXHIBITS** Oklahoma City,


SCHEMATIC DESIGN SERVICES - TASK 1A

NORTHCENTRAL LANDSCAPE DEMOLITION PLAN 01/28/2020 RWR

SHEET NUMBER L03.102

CLIENT

PGAV 77022-00

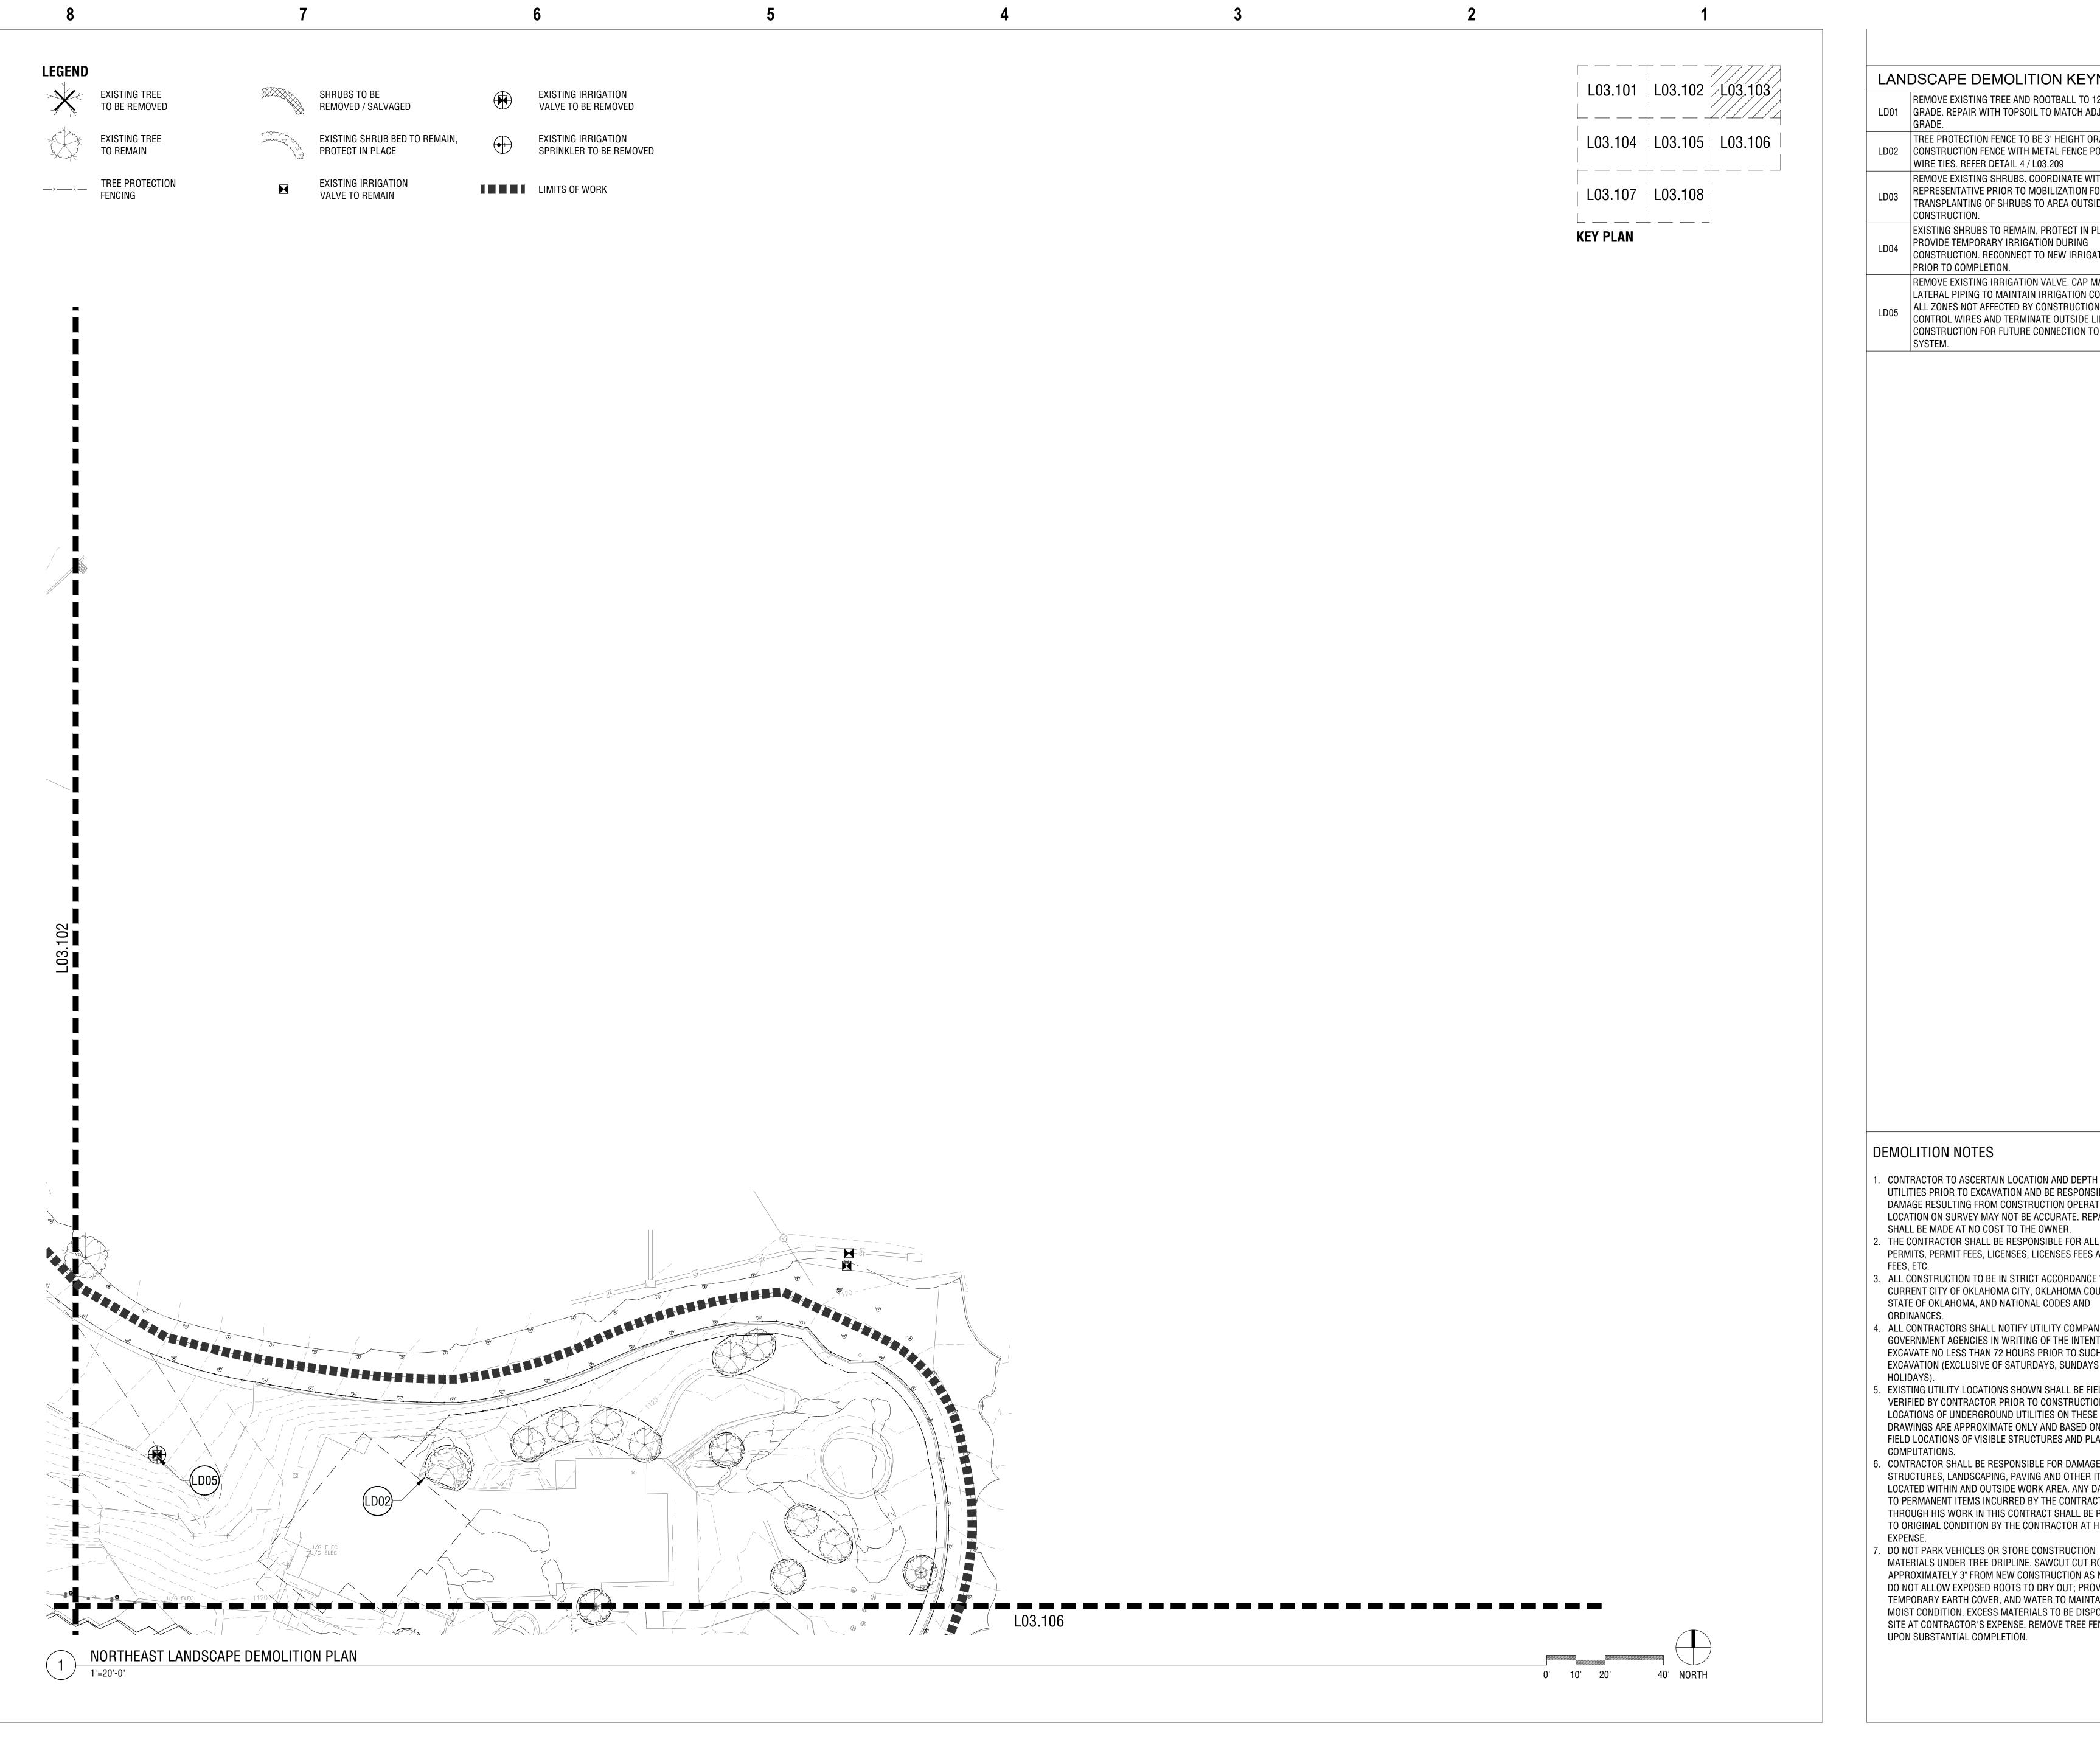

- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE
 - LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND WIRE TIES. REFER DETAIL 4 / L03.209 REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S
 - REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.
 - EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
 - REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOR ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONTROL WIRES AND TERMINATE OUTSIDE LIMITS OF CONSTRUCTION FOR FUTURE CONNECTION TO NEW

PGAV DESTINATIONS PECKHAM GEYTON ALBERS & VIETS, INC. 200 North Becadway, Swite 1000, St. Lowis, MO 63102 \$314\(\frac{1}{2}\)231-7318 WWW.#GAV.COM



Landscape Architects

nowell&vancuren

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM CONSTRUCTION OPERATIONS. LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH
- CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY, STATE OF OKLAHOMA, AND NATIONAL CODES AND ORDINANCES. . ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND HOLIDAYS).
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE DRAWINGS ARE APPROXIMATE ONLY AND BASED ON ACTUAL FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS.
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



Oklahoma City,


SAVANNAH

EXHIBITS

SCHEMATIC DESIGN SERVICES - TASK 1A


NORTHEAST LANDSCAPE DEMOLITION PLAN 01/28/2020

PGAV 77022-00 CLIENT SHEET NUMBER

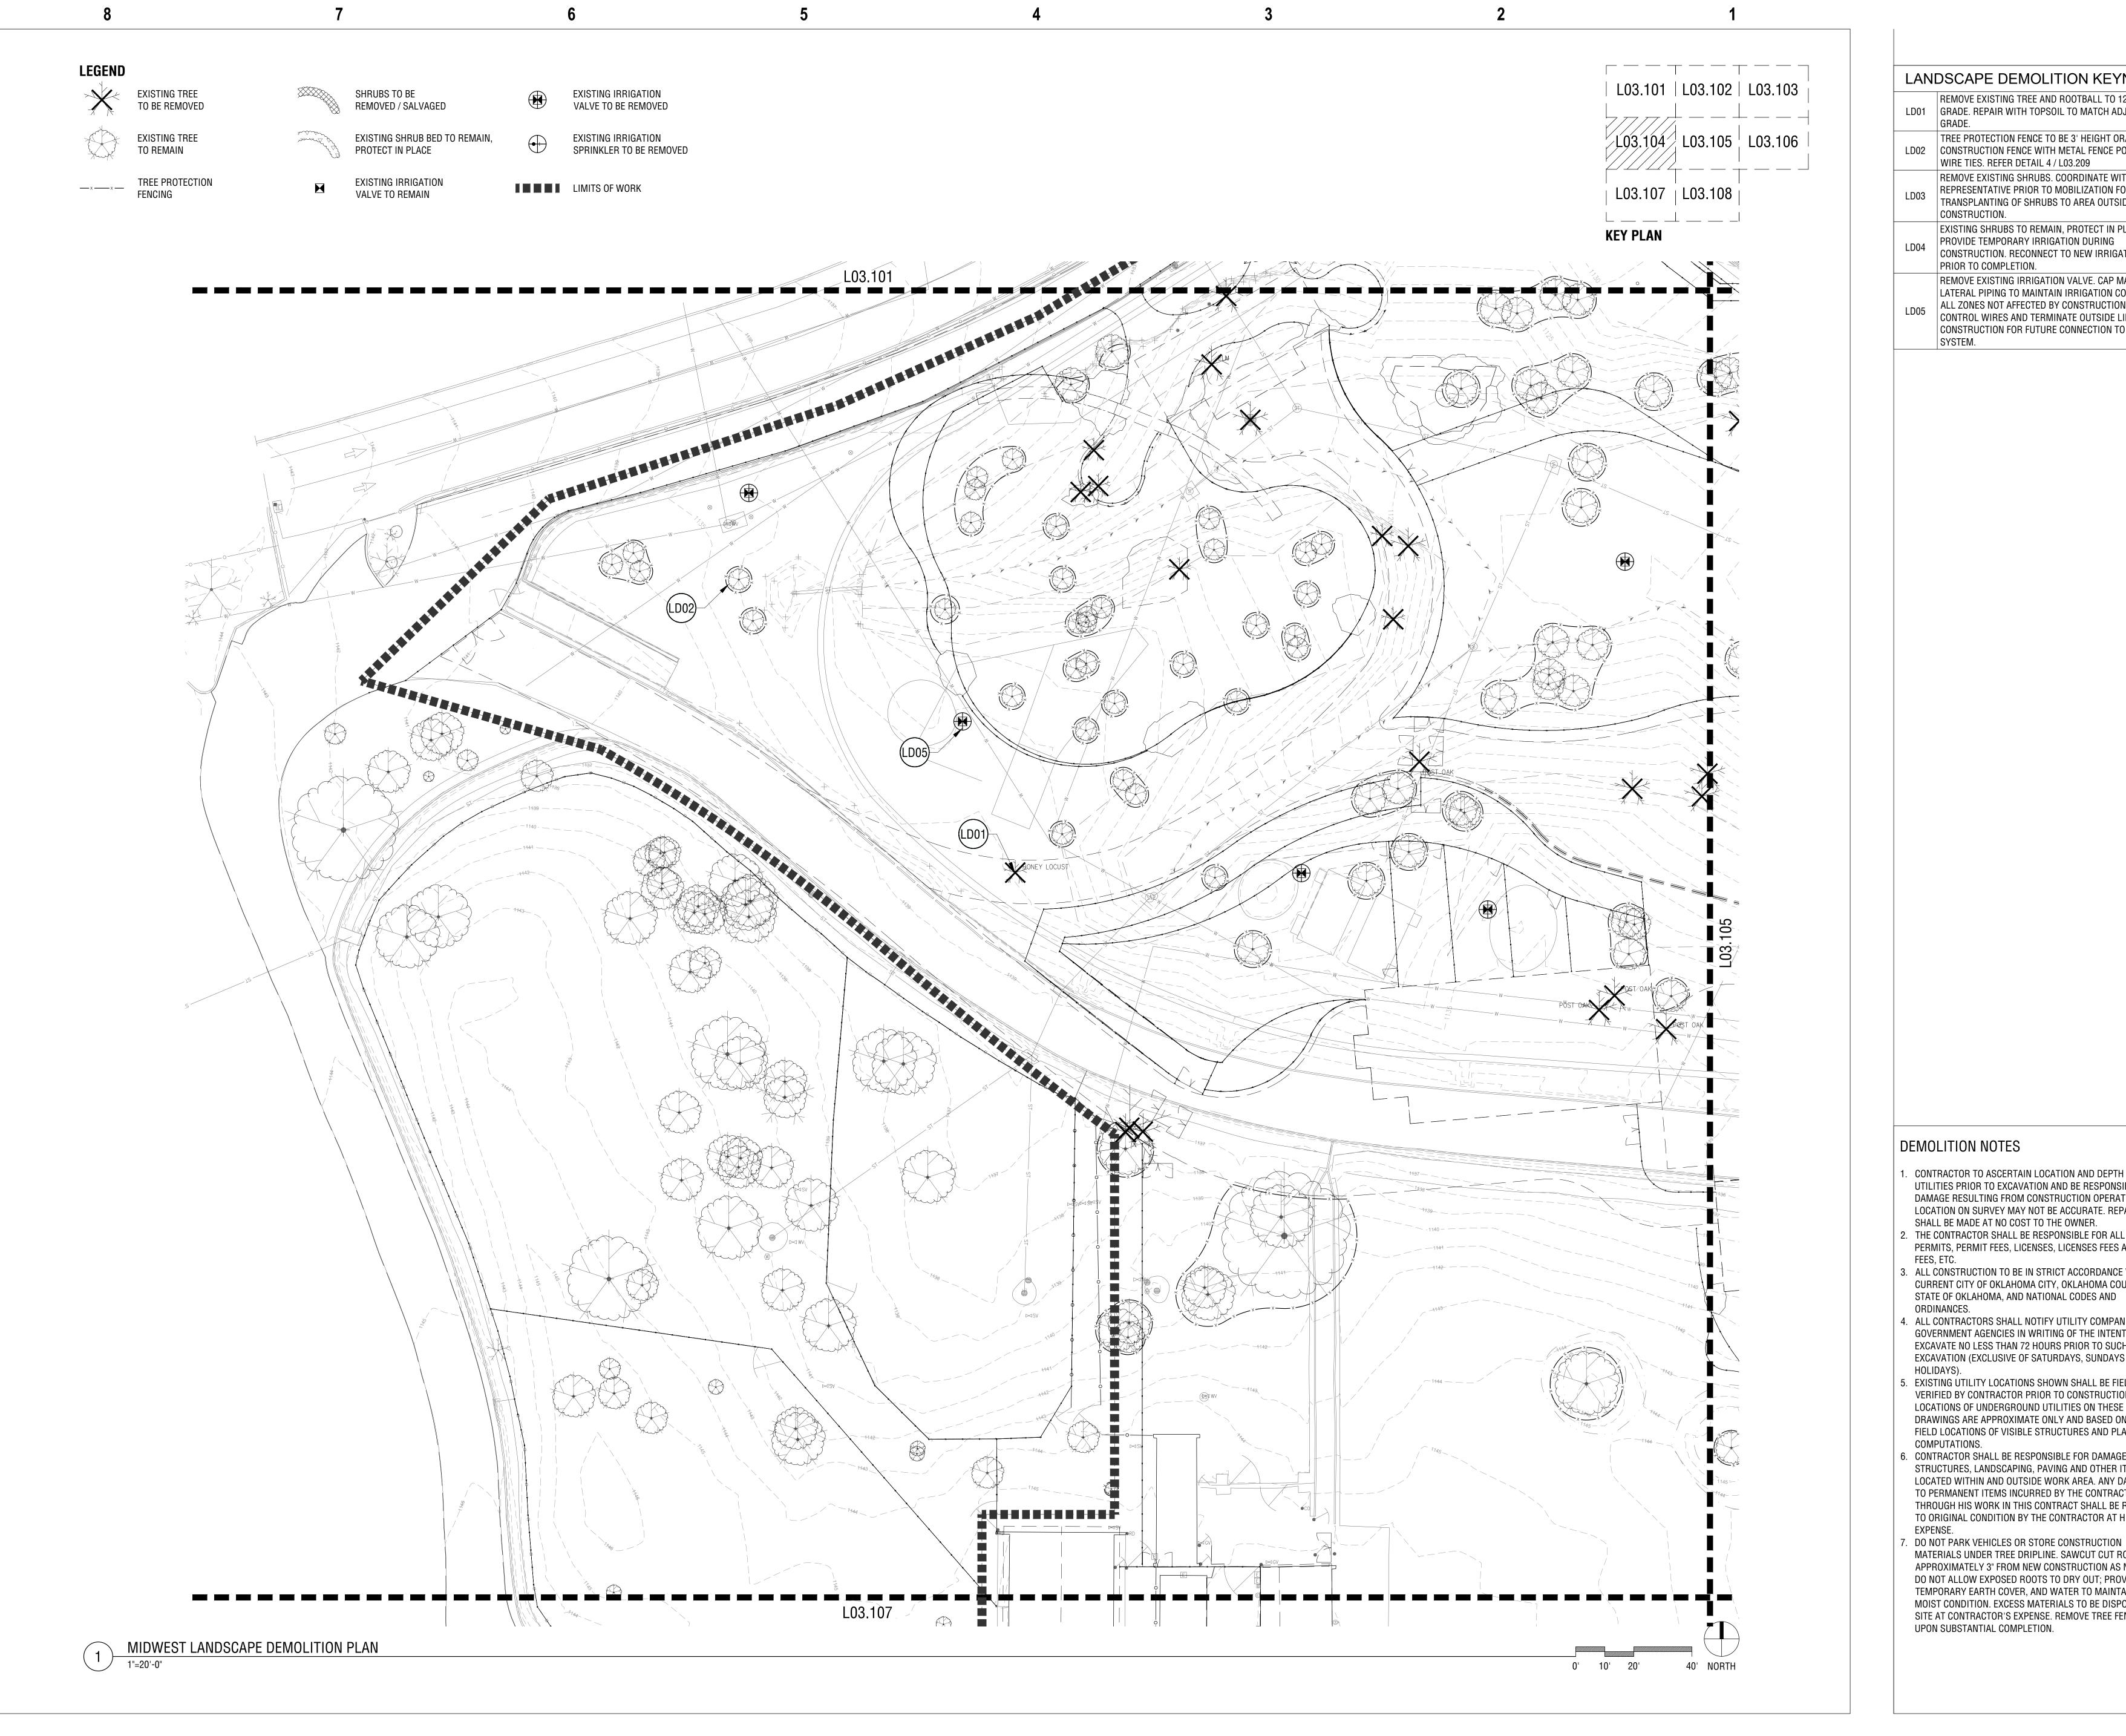

- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE
- LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND WIRE TIES. REFER DETAIL 4 / L03.209
- REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.
- EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
- REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND CONSTRUCTION FOR FUTURE CONNECTION TO NEW

PGAV





Landscape Architects

howell & vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM CONSTRUCTION OPERATIONS. LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH
- CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY, STATE OF OKLAHOMA, AND NATIONAL CODES AND ORDINANCES. . ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS.
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



PLAZA AND AFRICA-THEMED SAVANNAH **EXHIBITS** Oklahoma City,


Z00

ORIENTATION

SCHEMATIC DESIGN SERVICES - TASK 1A

> MIDWEST LANDSCAPE DEMOLITION PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT SHEET NUMBER

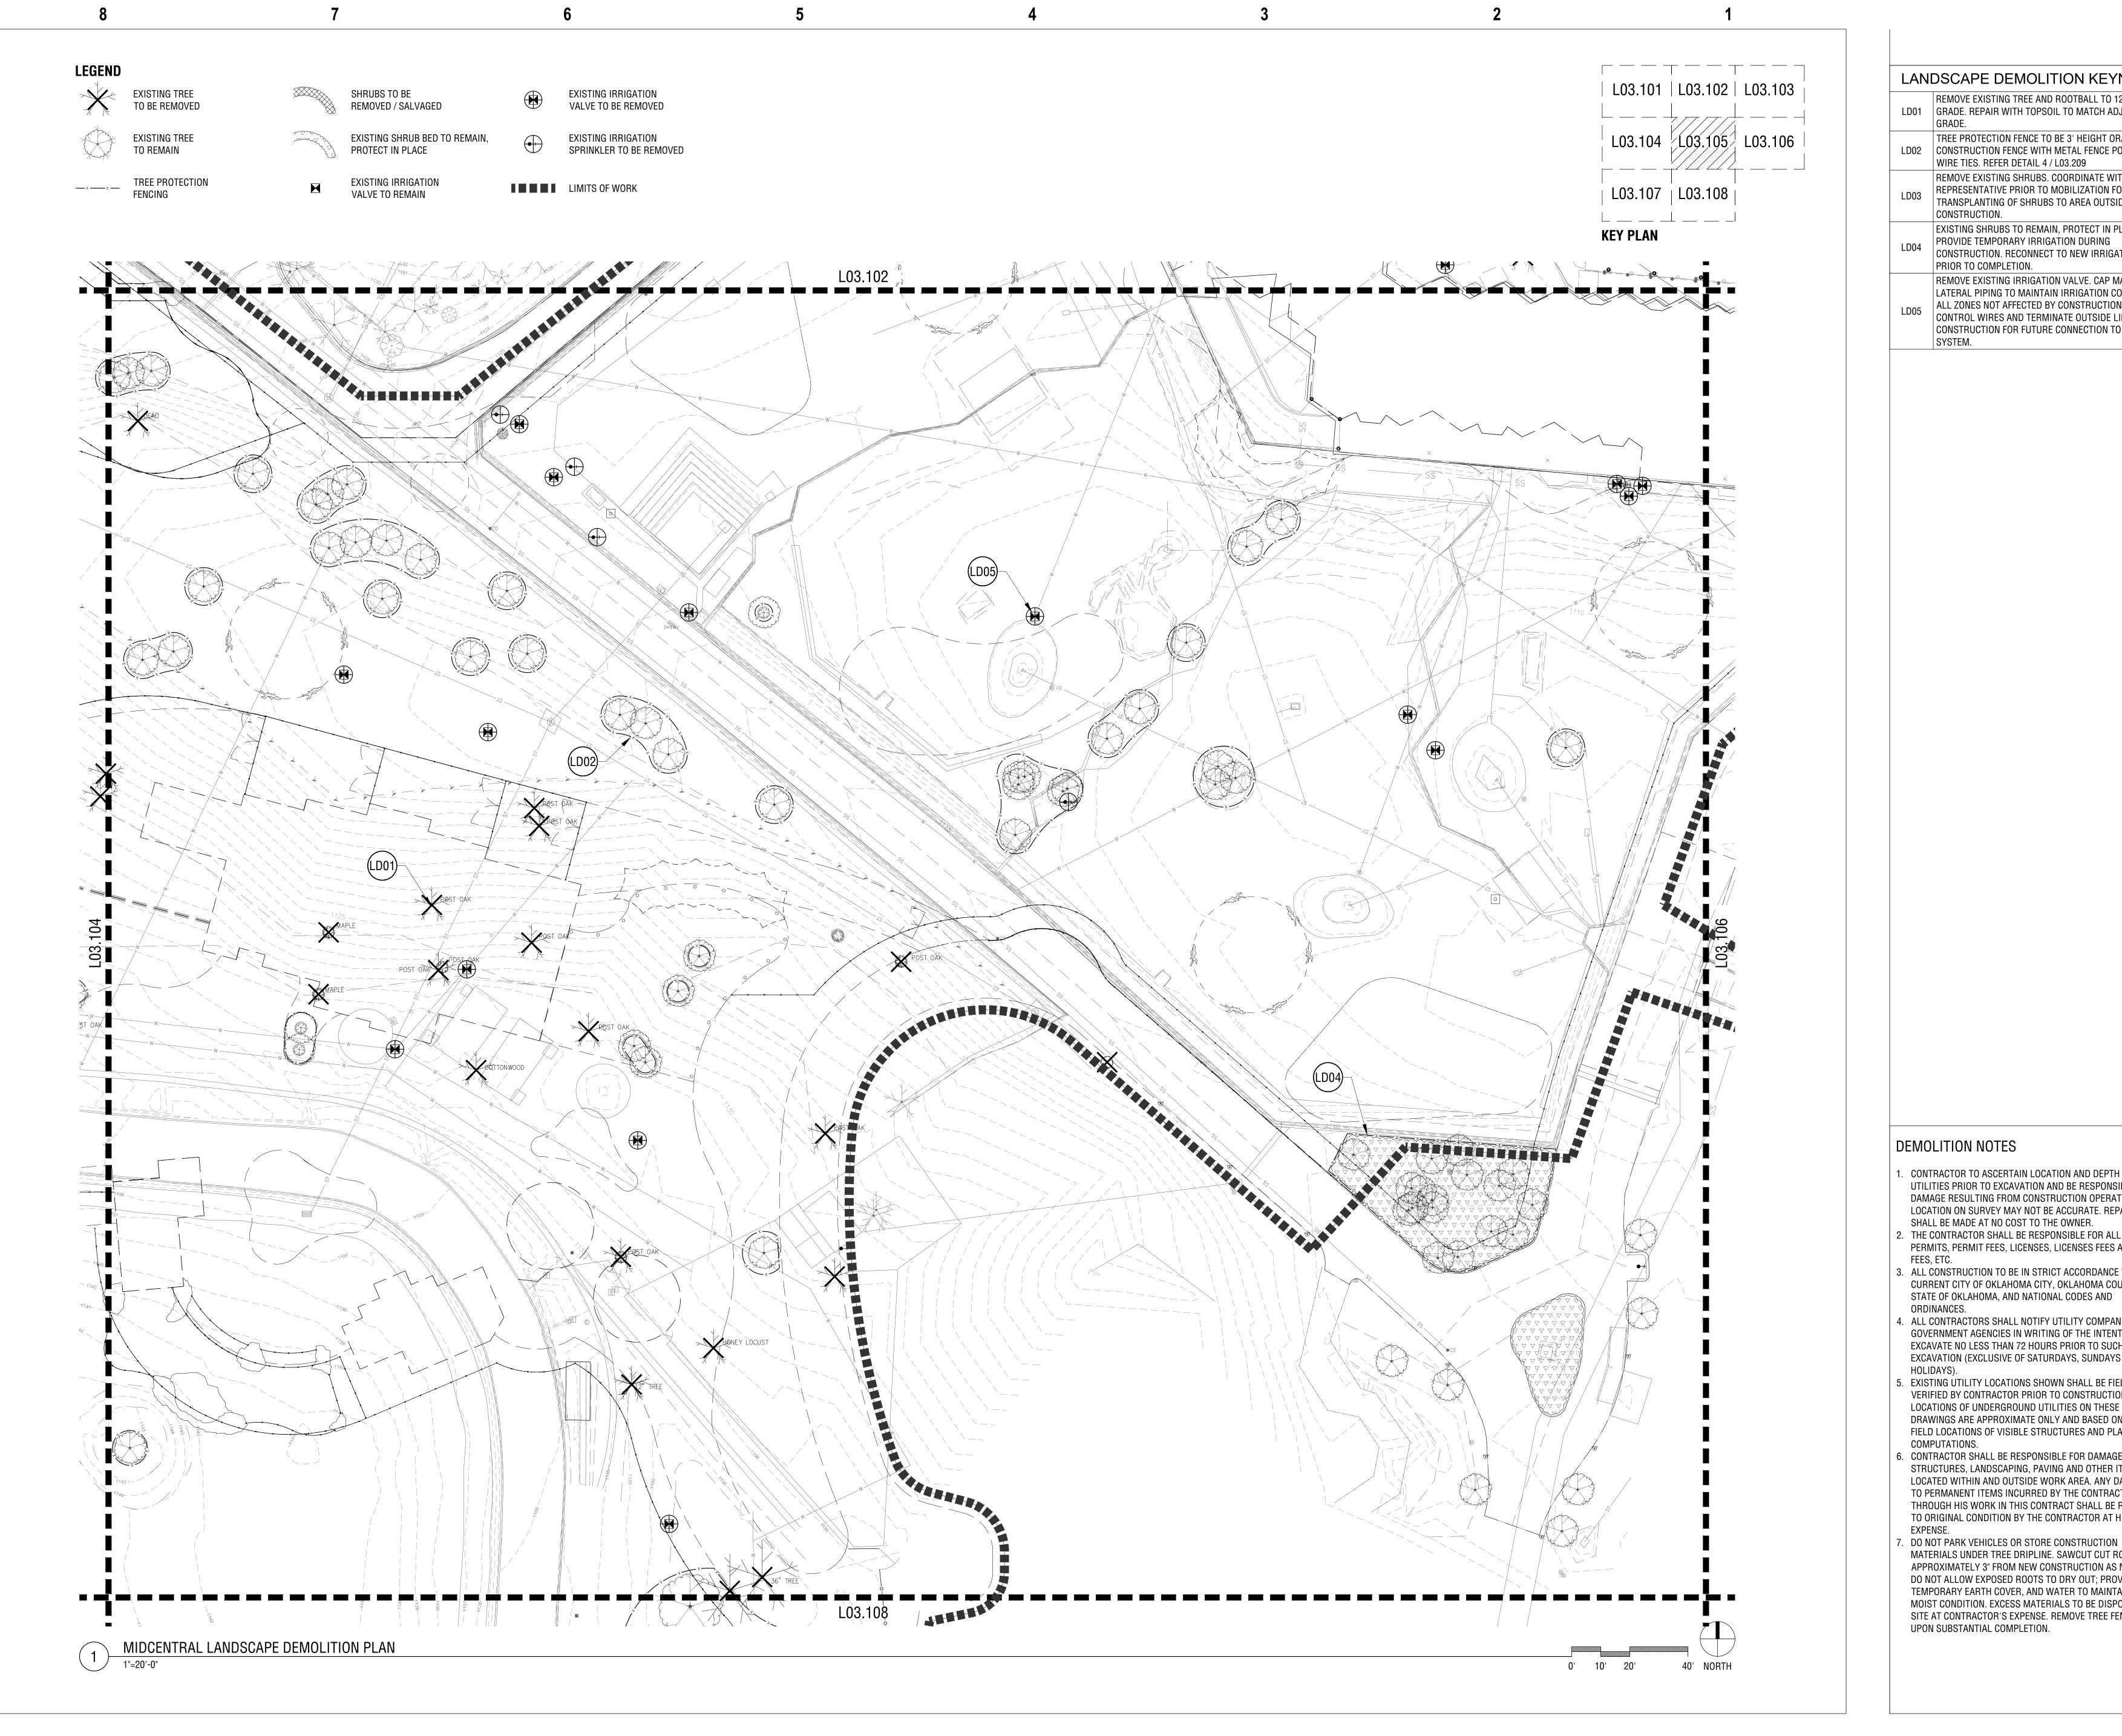

- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND
- WIRE TIES. REFER DETAIL 4 / L03.209 REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S
- REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.
- EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
- REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOF ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONSTRUCTION FOR FUTURE CONNECTION TO NEW





Landscape Architects

howell & vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification

and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY,
- STATE OF OKLAHOMA, AND NATIONAL CODES AND ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO
- EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS.
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



ORIENTATION PLAZA AND AFRICA-THEMED SAVANNAH **EXHIBITS**

Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A


MIDCENTRAL LANDSCAPE DEMOLITION PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT SHEET NUMBER



- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE
 - LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND WIRE TIES. REFER DETAIL 4 / L03.209
- REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.
- EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
- REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOR ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONSTRUCTION FOR FUTURE CONNECTION TO NEW





howell & vancurer

Landscape Architects

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM CONSTRUCTION OPERATIONS. LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY,
- STATE OF OKLAHOMA, AND NATIONAL CODES AND ORDINANCES. . ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.



AFRICA-THEMED

SAVANNAH

EXHIBITS

Oklahoma City,


SCHEMATIC DESIGN SERVICES - TASK 1A

MIDEAST LANDSCAPE DEMOLITION PLAN

01/28/2020 RWR PGAV 77022-00 CLIENT OKCZOO

L03.106

SHEET NUMBER

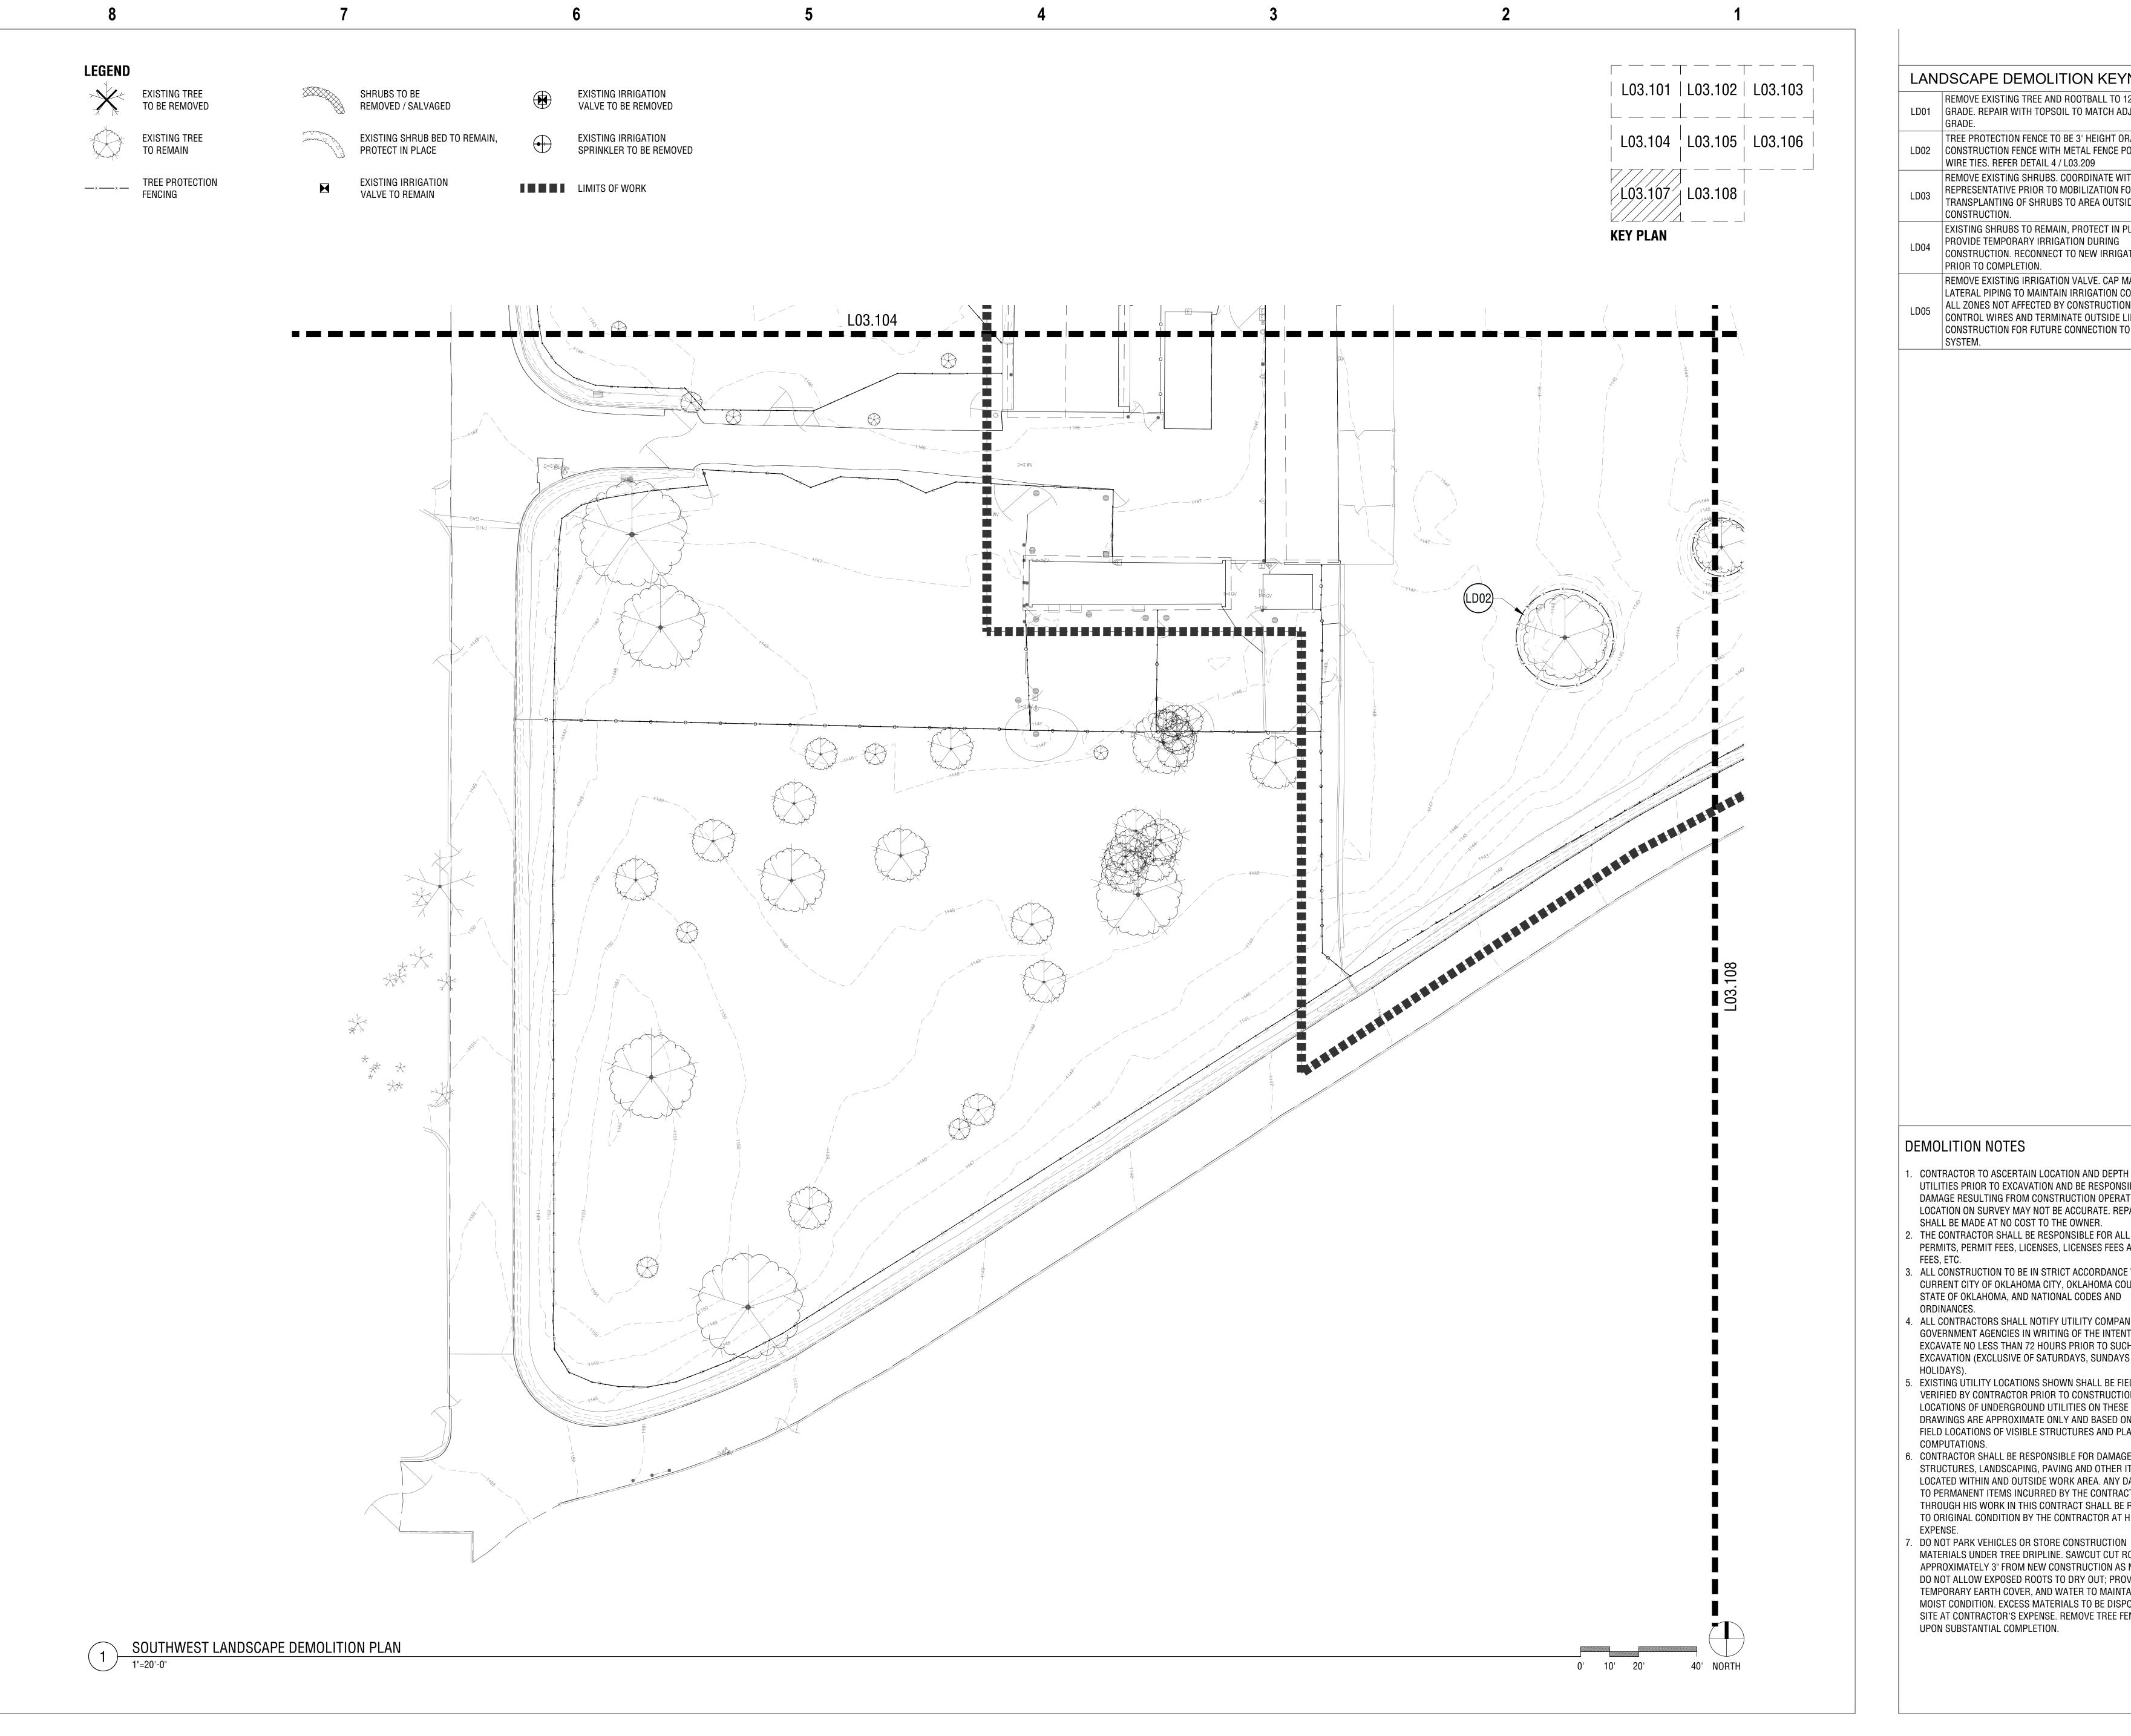



- REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT
- TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE
- LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND WIRE TIES. REFER DETAIL 4 / L03.209
- REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.
- EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.
- REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOR ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONTROL WIRES AND TERMINATE OUTSIDE LIMITS OF CONSTRUCTION FOR FUTURE CONNECTION TO NEW





howell & vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104


Landscape Architects

Accessibility for Persons with Disabilities:

This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

918.592.1270 phone howellvancuren.com

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH
- CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY, STATE OF OKLAHOMA, AND NATIONAL CODES AND ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.

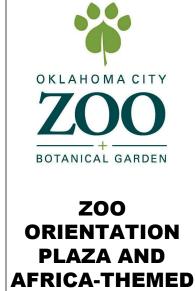

SAVANNAH


EXHIBITS

Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A

SOUTHWEST LANDSCAPE DEMOLITION PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT OKCZOO SHEET NUMBER

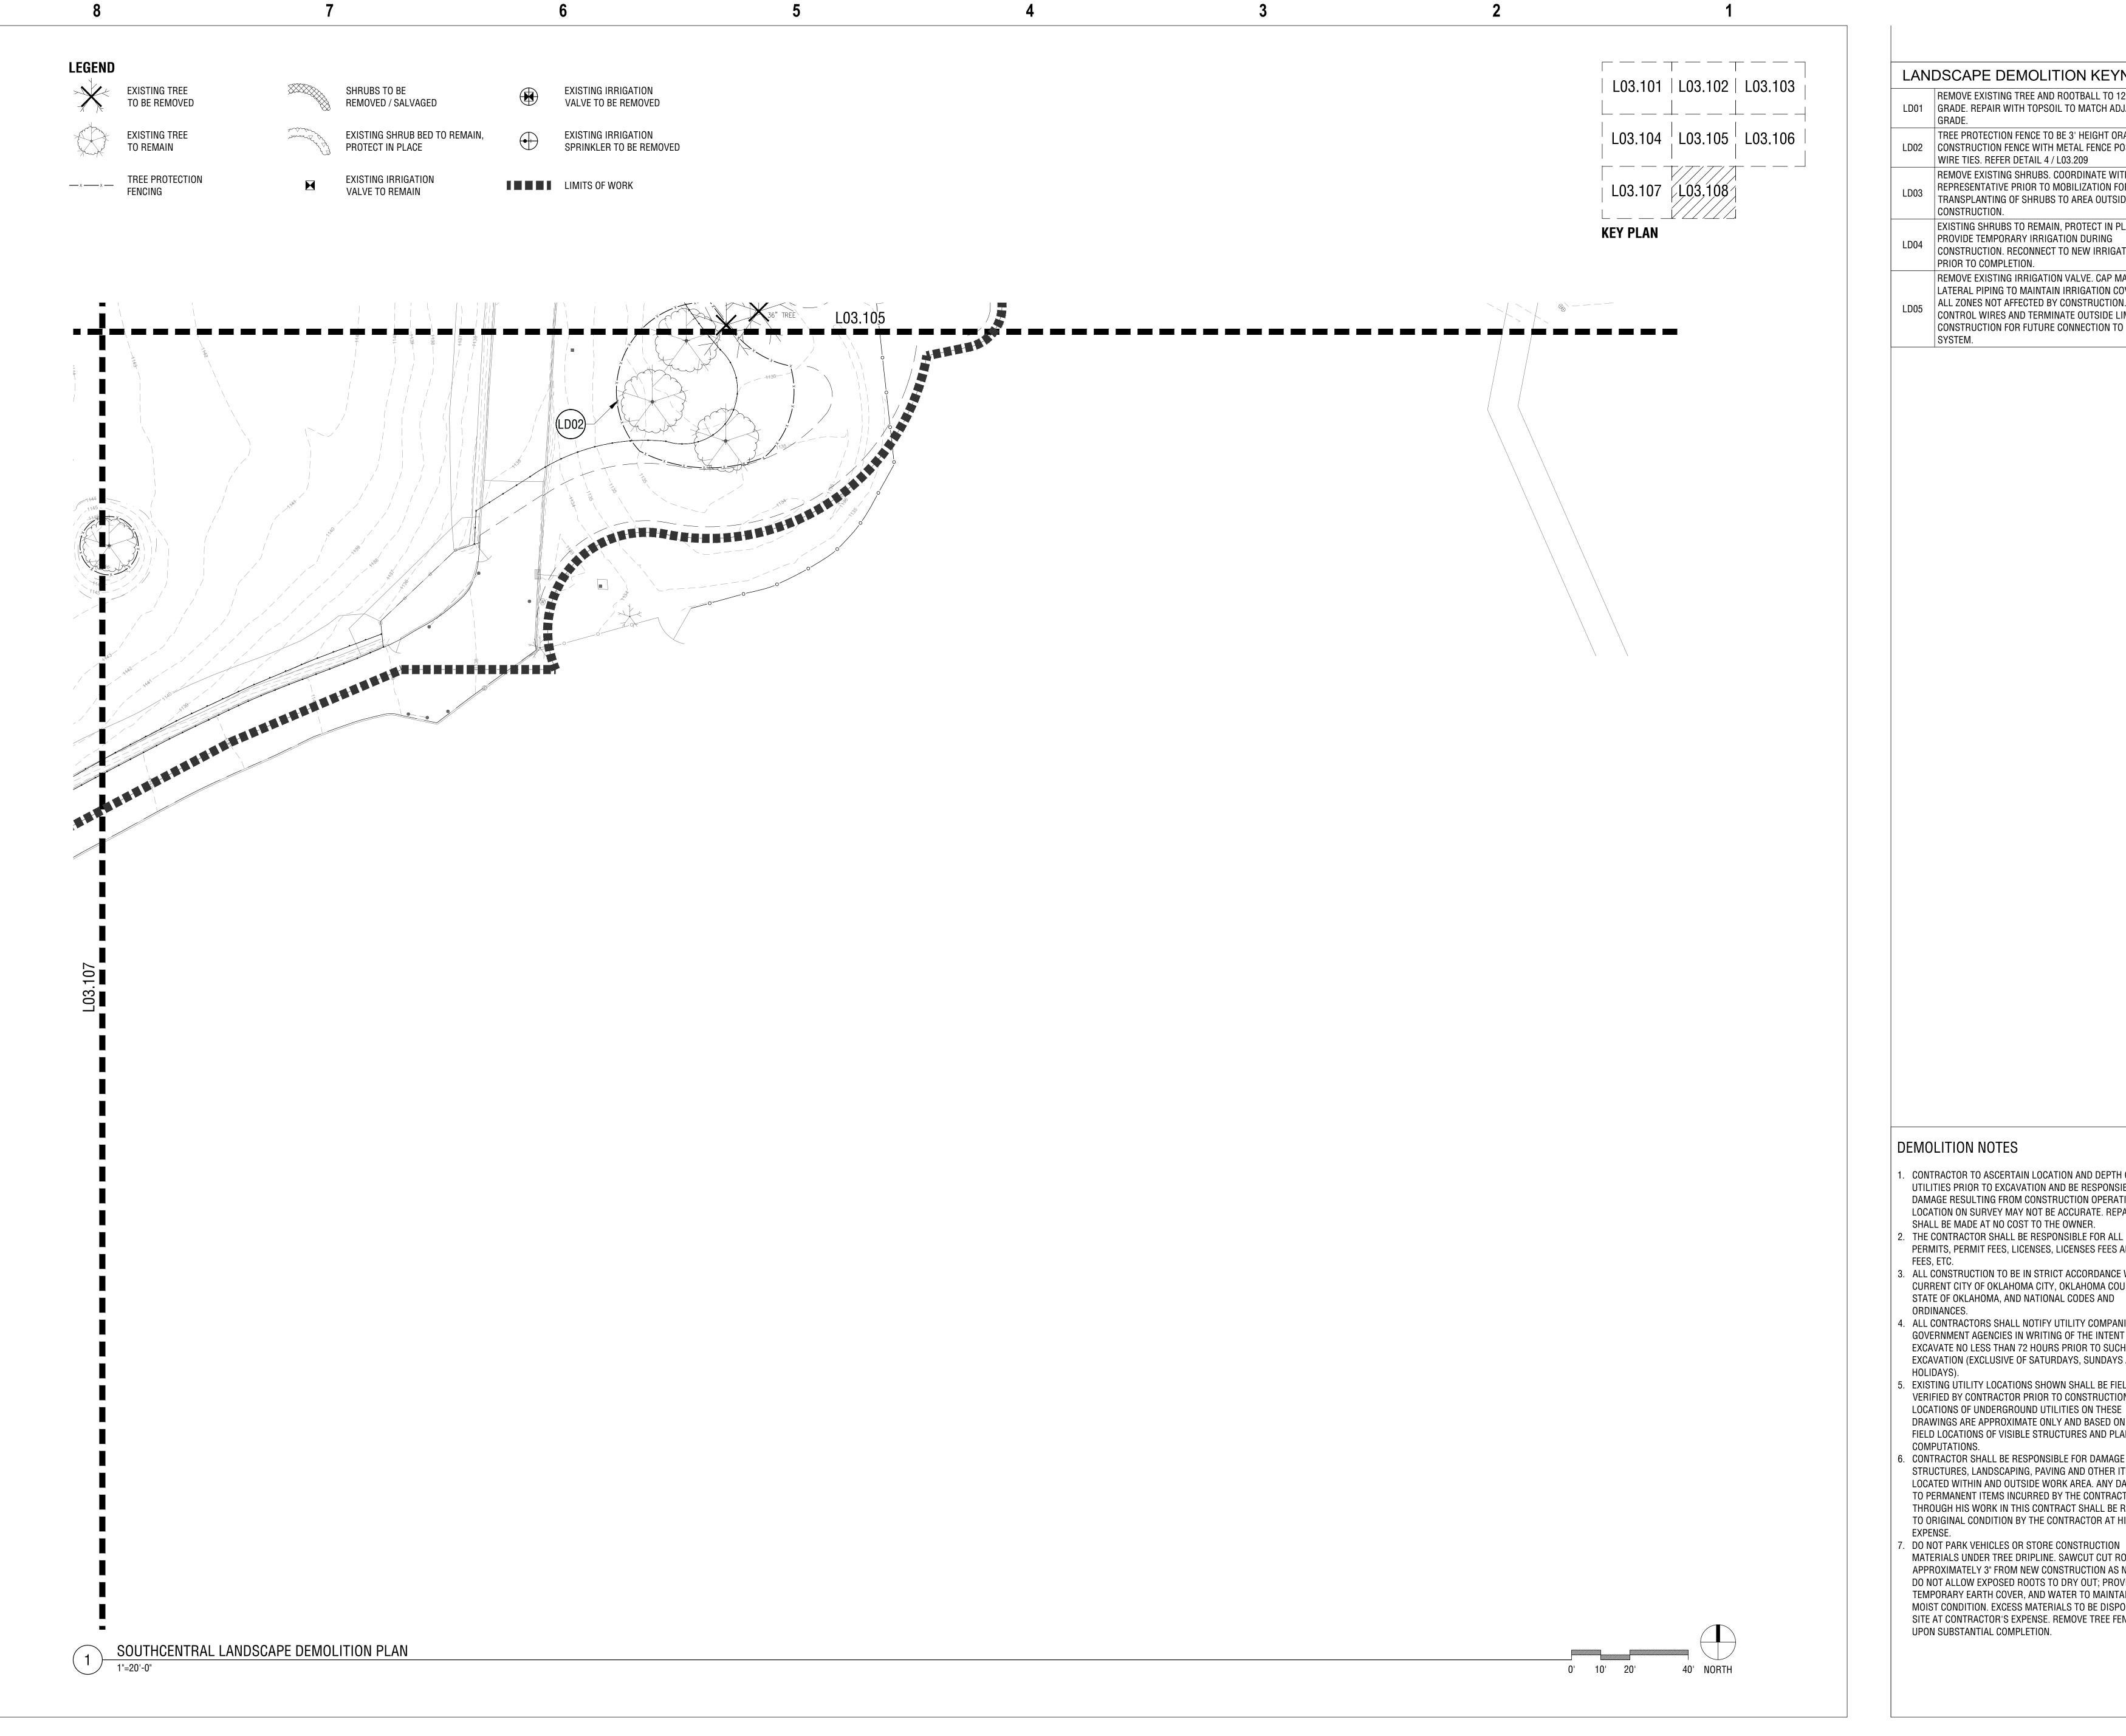

REMOVE EXISTING TREE AND ROOTBALL TO 12" BELOW LD01 GRADE. REPAIR WITH TOPSOIL TO MATCH ADJACENT

TREE PROTECTION FENCE TO BE 3' HEIGHT ORANGE LD02 | CONSTRUCTION FENCE WITH METAL FENCE POSTS AND

WIRE TIES. REFER DETAIL 4 / L03.209 REMOVE EXISTING SHRUBS. COORDINATE WITH OWNER'S

REPRESENTATIVE PRIOR TO MOBILIZATION FOR POTENTIAL TRANSPLANTING OF SHRUBS TO AREA OUTSIDE LIMITS OF CONSTRUCTION.

EXISTING SHRUBS TO REMAIN, PROTECT IN PLACE. PROVIDE TEMPORARY IRRIGATION DURING CONSTRUCTION. RECONNECT TO NEW IRRIGATION SYSTEM PRIOR TO COMPLETION.

REMOVE EXISTING IRRIGATION VALVE. CAP MAINLINE AND LATERAL PIPING TO MAINTAIN IRRIGATION COVERAGE FOR ALL ZONES NOT AFFECTED BY CONSTRUCTION. LABEL CONTROL WIRES AND TERMINATE OUTSIDE LIMITS OF CONSTRUCTION FOR FUTURE CONNECTION TO NEW





Landscape Architects howell&vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM CONSTRUCTION OPERATIONS. LOCATION ON SURVEY MAY NOT BE ACCURATE. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.
- PERMITS, PERMIT FEES, LICENSES, LICENSES FEES AND TAP . ALL CONSTRUCTION TO BE IN STRICT ACCORDANCE WITH
- CURRENT CITY OF OKLAHOMA CITY, OKLAHOMA COUNTY, STATE OF OKLAHOMA, AND NATIONAL CODES AND ORDINANCES. . ALL CONTRACTORS SHALL NOTIFY UTILITY COMPANIES AND
- GOVERNMENT AGENCIES IN WRITING OF THE INTENT TO EXCAVATE NO LESS THAN 72 HOURS PRIOR TO SUCH EXCAVATION (EXCLUSIVE OF SATURDAYS, SUNDAYS AND
- EXISTING UTILITY LOCATIONS SHOWN SHALL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. LOCATIONS OF UNDERGROUND UTILITIES ON THESE DRAWINGS ARE APPROXIMATE ONLY AND BASED ON ACTUAL FIELD LOCATIONS OF VISIBLE STRUCTURES AND PLAN COMPUTATIONS.
- 6. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ALL STRUCTURES, LANDSCAPING, PAVING AND OTHER ITEMS LOCATED WITHIN AND OUTSIDE WORK AREA. ANY DAMAGE TO PERMANENT ITEMS INCURRED BY THE CONTRACTOR THROUGH HIS WORK IN THIS CONTRACT SHALL BE REPAIRED TO ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN
- DO NOT PARK VEHICLES OR STORE CONSTRUCTION MATERIALS UNDER TREE DRIPLINE. SAWCUT CUT ROOTS APPROXIMATELY 3" FROM NEW CONSTRUCTION AS NEEDED. DO NOT ALLOW EXPOSED ROOTS TO DRY OUT; PROVIDE TEMPORARY EARTH COVER, AND WATER TO MAINTAIN A MOIST CONDITION. EXCESS MATERIALS TO BE DISPOSED OFF SITE AT CONTRACTOR'S EXPENSE. REMOVE TREE FENCING UPON SUBSTANTIAL COMPLETION.




PLAZA AND **AFRICA-THEMED** SAVANNAH **EXHIBITS** Oklahoma City,


SCHEMATIC DESIGN SERVICES - TASK 1A

SOUTHCENTRAL LANDSCAPE DEMOLITION PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT OKCZOO SHEET NUMBER

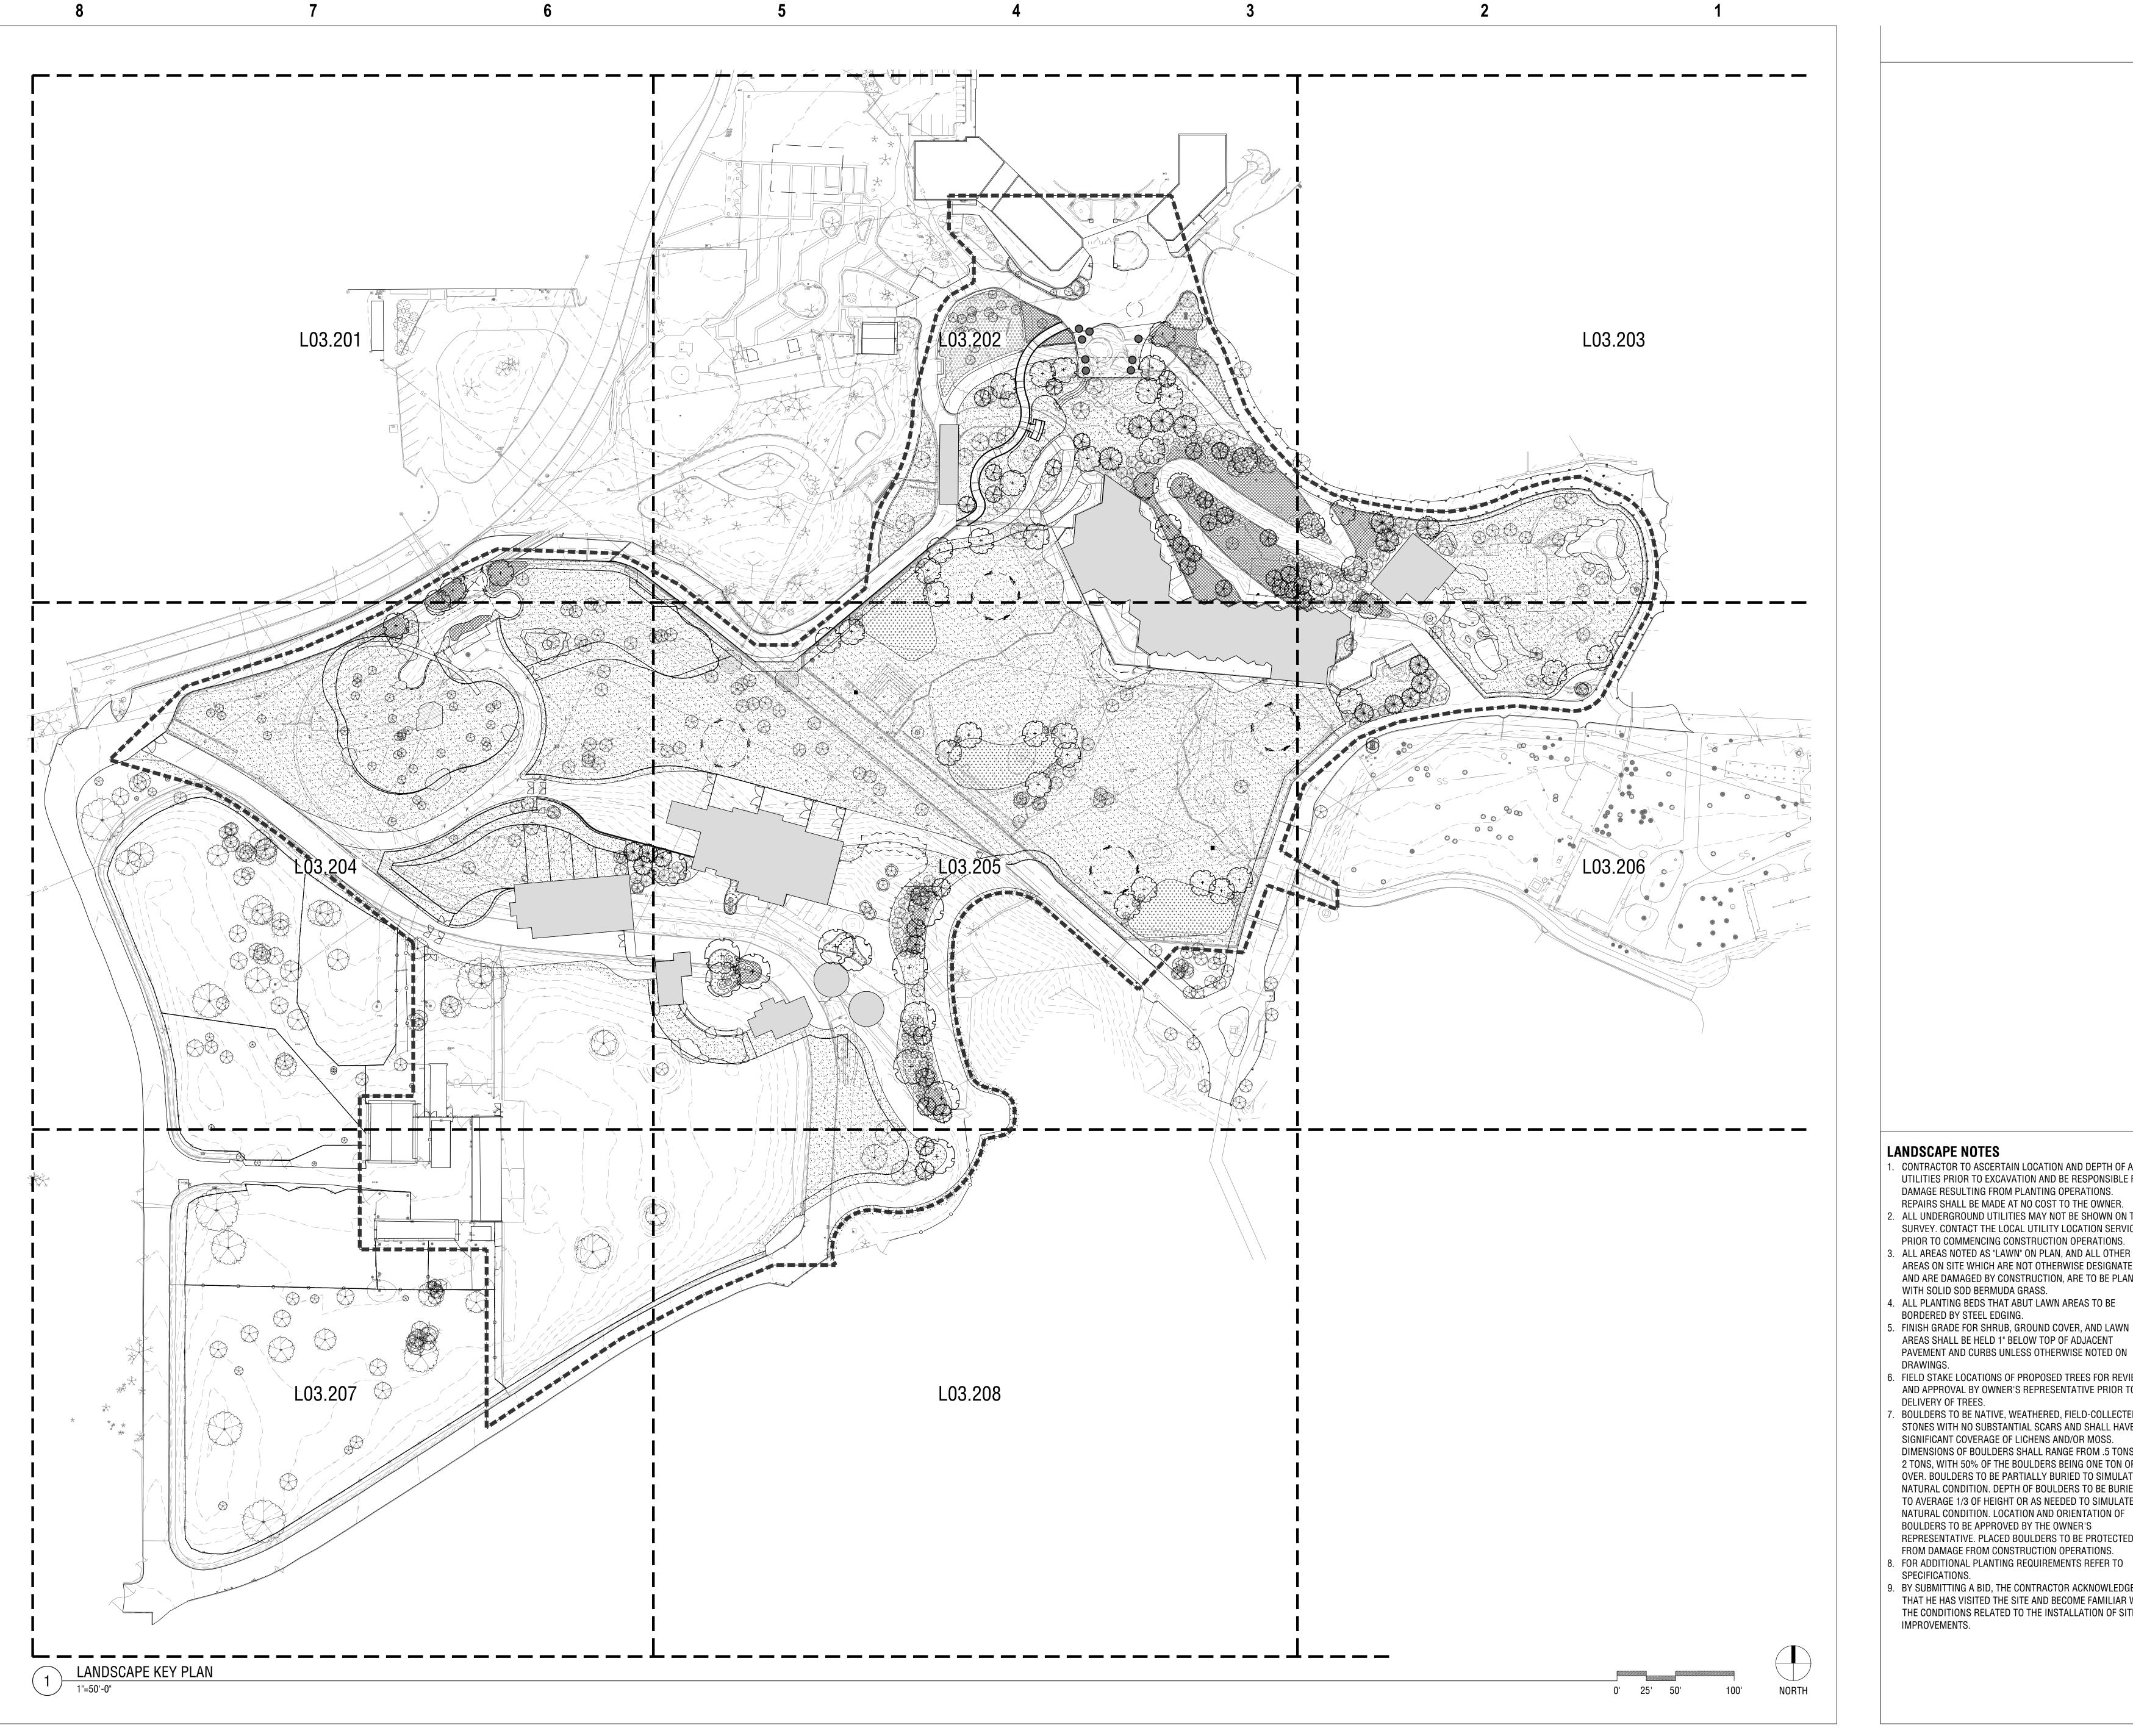





howell&vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements ritical to providing Access for Disabled
Persons. Contractor shall provide verification
and certification of Compliance with the
applicable accessibility regulations.

LANDSCAPE NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR
- ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED
- WITH SOLID SOD BERMUDA GRASS. . ALL PLANTING BEDS THAT ABUT LAWN AREAS TO BE BORDERED BY STEEL EDGING.
- FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- . FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A
- BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED FROM DAMAGE FROM CONSTRUCTION OPERATIONS. 8. FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO SPECIFICATIONS.
- 9. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.



PLAZA AND **AFRICA-THEMED** SAVANNAH **EXHIBITS** Oklahoma City,


Z00

ORIENTATION


SCHEMATIC DESIGN SERVICES - TASK 1A

LANDSCAPE KEY PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT OKCZOO SHEET NUMBER

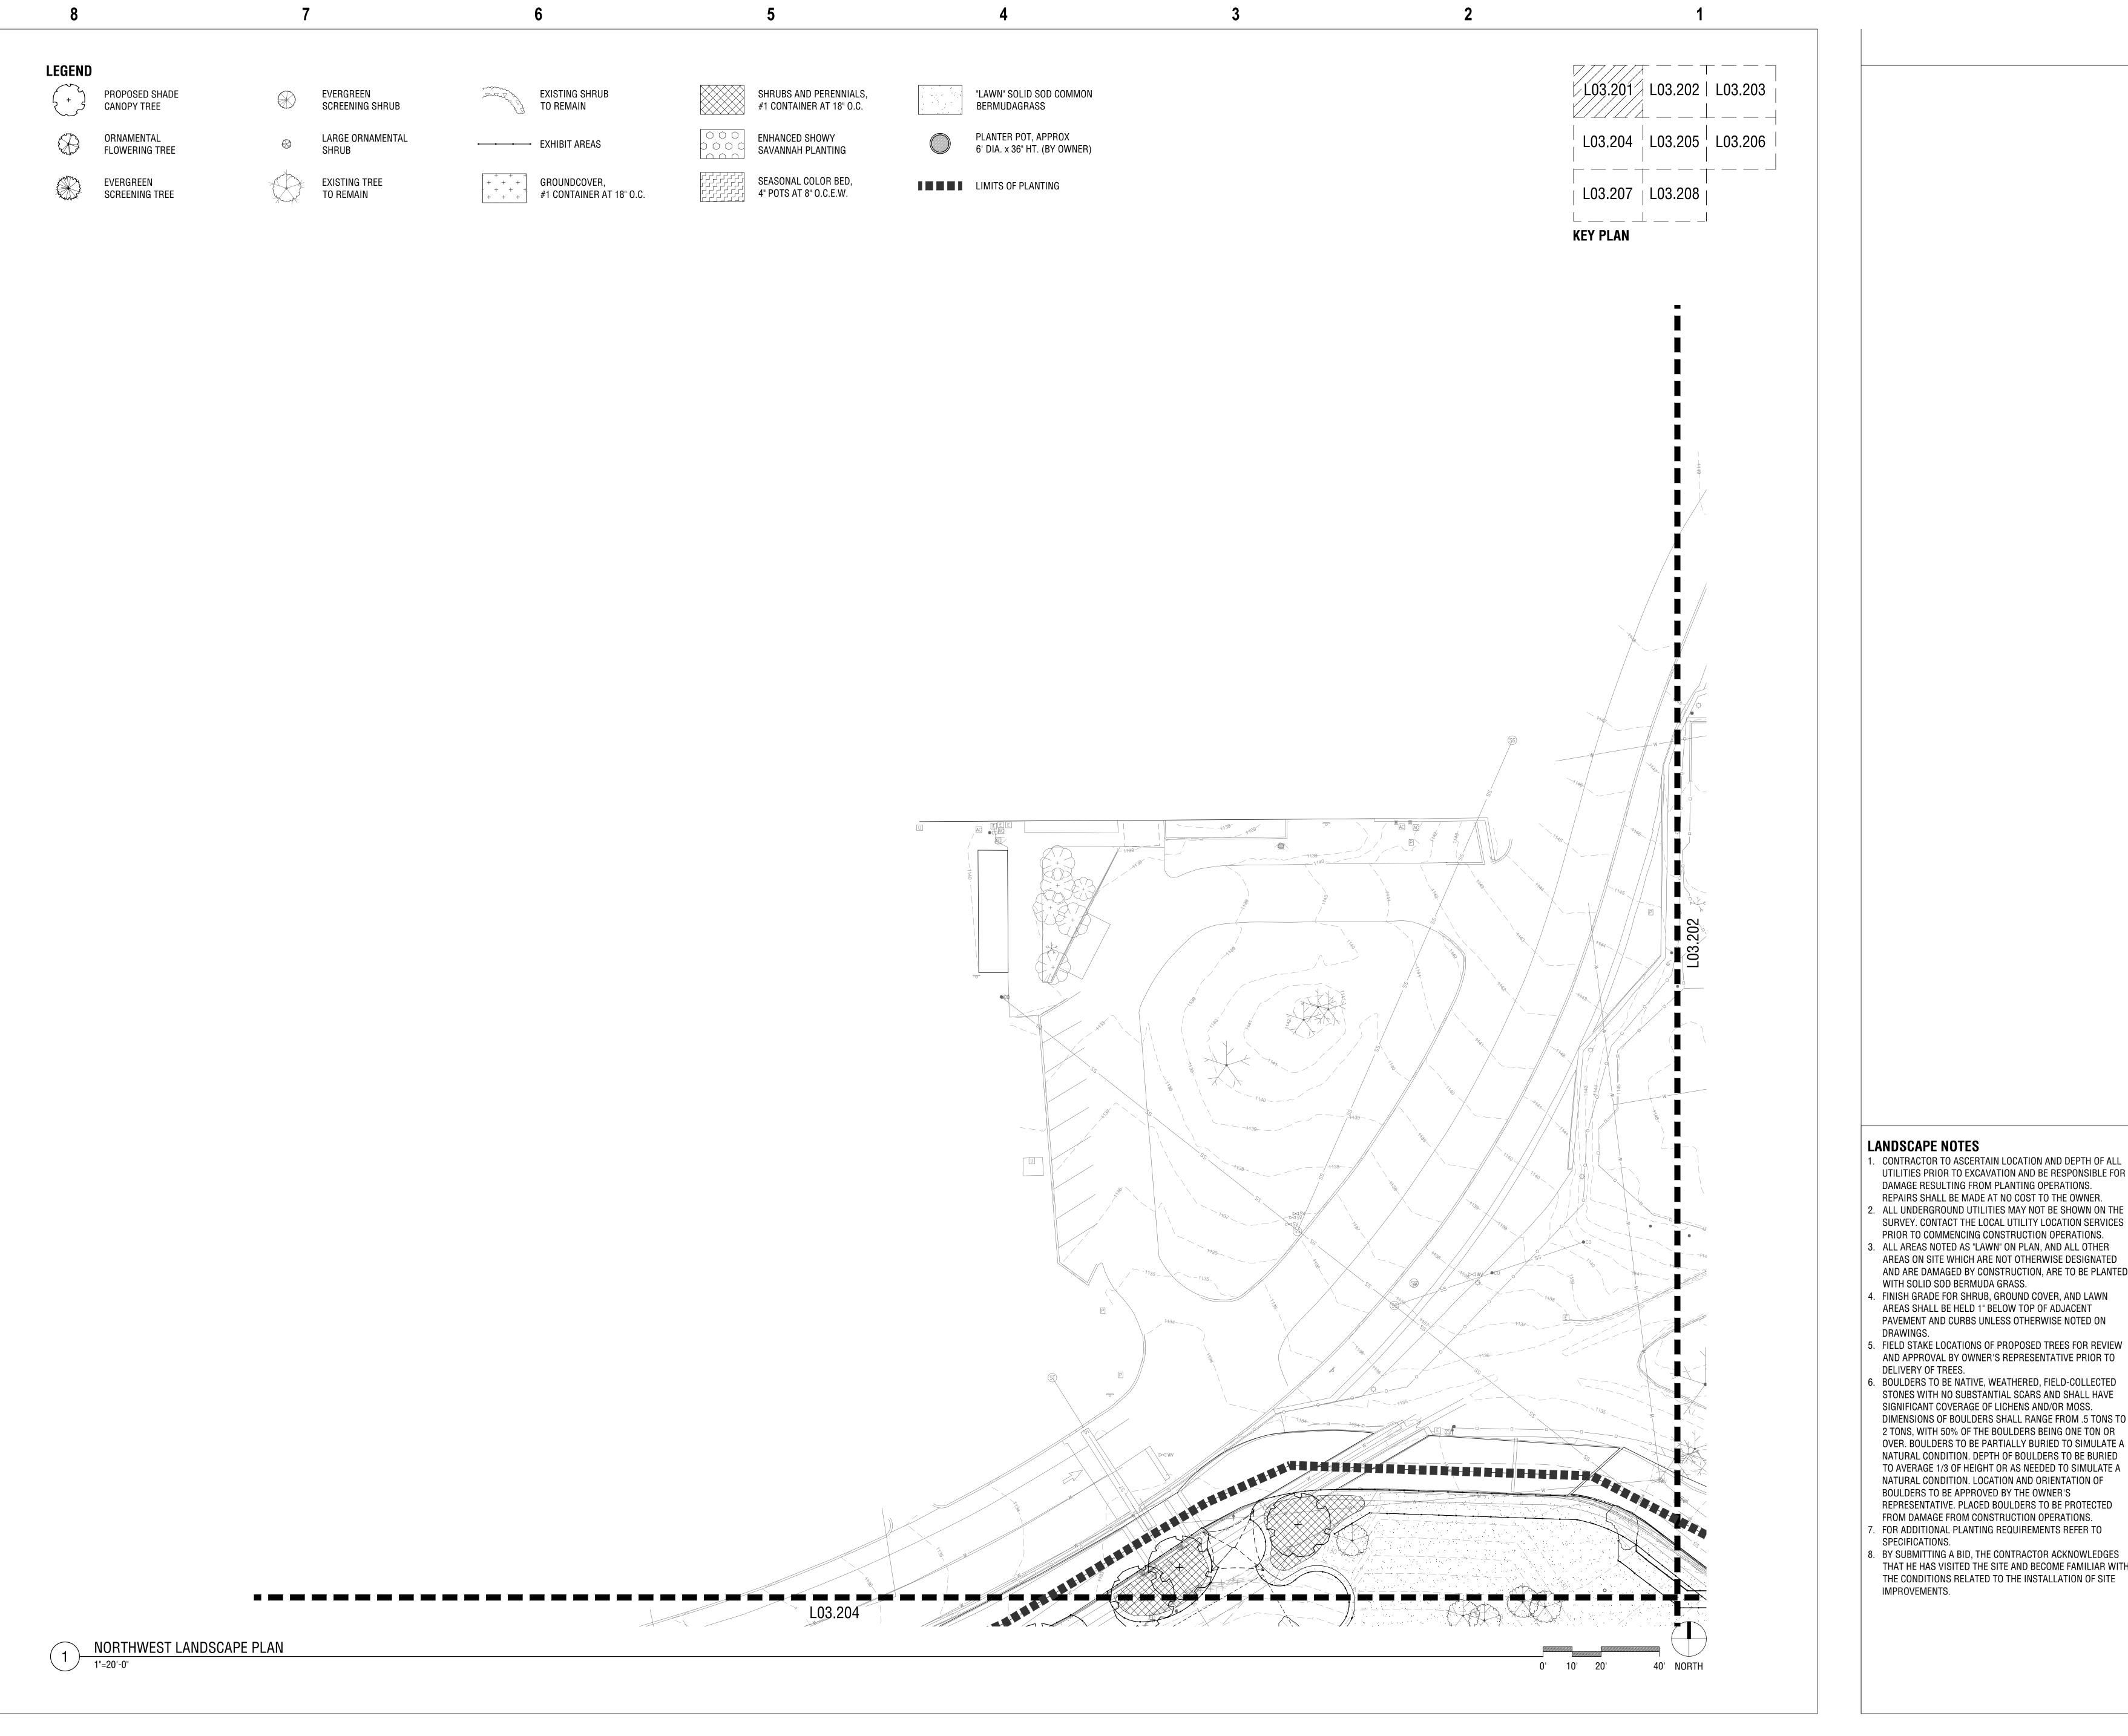





Landscape Architects

howell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellyancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- . CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.
- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. . ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER
- AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN
- AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED
- FROM DAMAGE FROM CONSTRUCTION OPERATIONS. FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO
- BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE



ORIENTATION PLAZA AND **AFRICA-THEMED** SAVANNAH **EXHIBITS**

Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A

NORTHWEST LANDSCAPE PLAN


01/28/2020 CLIENT 77022-00



LANDSCAPE KEYNOTES

(8) PLANTER POTS (BY OWNER) SET ON ENTRY PLAZA / DECK ABOVE LEMUR HOLDING. SIZE APPROXIMATELY 6' NC01 DIAMETER x 36" HEIGHT WITH PLANTING MEDIUM. INCLUDE CONDUIT FOR DRIP IRRIGATION AND SUB-DRAIN CONNECTION TO STORM SEWER. REFER 6 / L03.209

SPACE SOUTH OF PLAZA DECK LEFT OPEN TO FRAME VIEW OF SAVANNAH.



PESTINATIONS
PECKHAM GUYTON AIBERS & VIETS, INC.
200 North Broadway, Suite 1000, St. Louis, MO 63102
§314):231-7318
WWW.#GAV.COM

howell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Landscape Architects

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.

- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER
- AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN
- AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- . FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED
- FROM DAMAGE FROM CONSTRUCTION OPERATIONS. FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO SPECIFICATIONS.
- . BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.



Oklahoma City,


OKLAHOMA CITY

BOTANICAL GARDEN


SCHEMATIC DESIGN SERVICES - TASK 1A

NORTHCENTRAL LANDSCAPE PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT

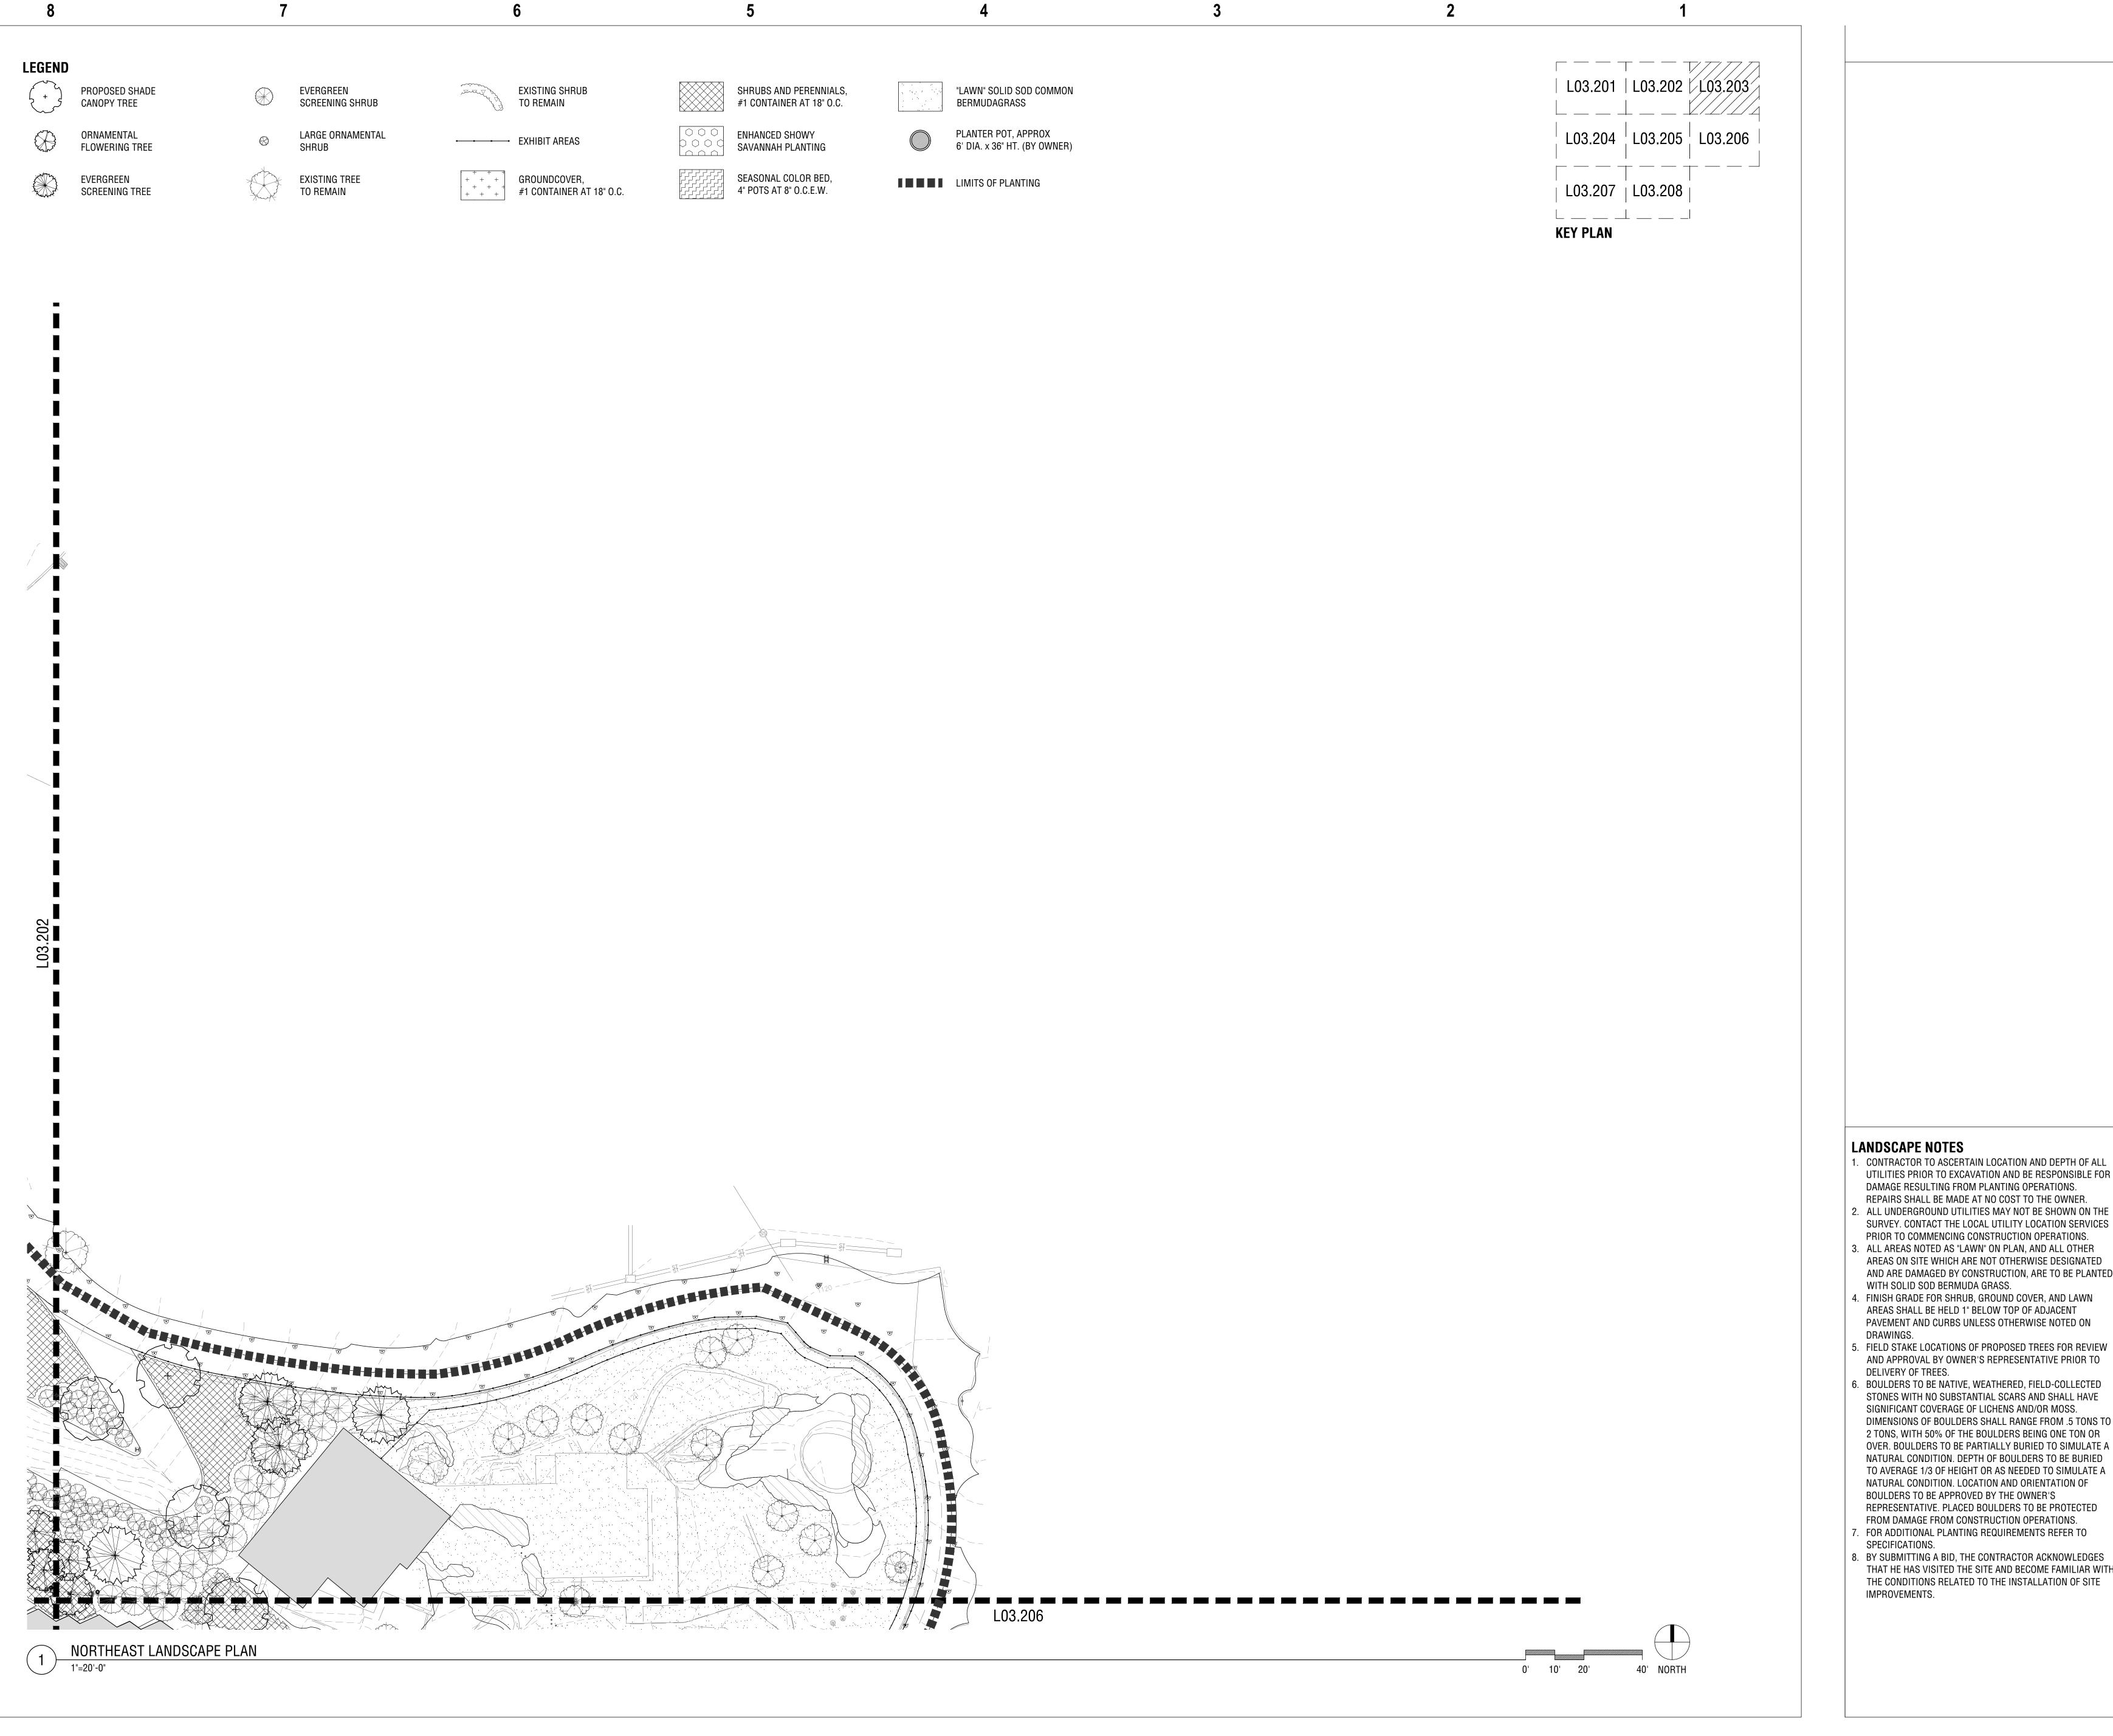






Landscape Architects

howell&vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellyancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.
- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. . ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER
- AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN
- AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED
- REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED FROM DAMAGE FROM CONSTRUCTION OPERATIONS. FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO
- B. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.

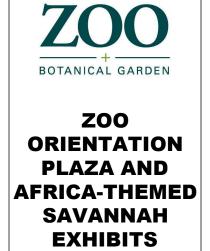

OKLAHOMA CITY

SCHEMATIC DESIGN SERVICES - TASK 1A

CLIENT


NORTHEAST LANDSCAPE PLAN

Oklahoma City,

01/28/2020

SHEET NUMBER


PGAV 77022-00

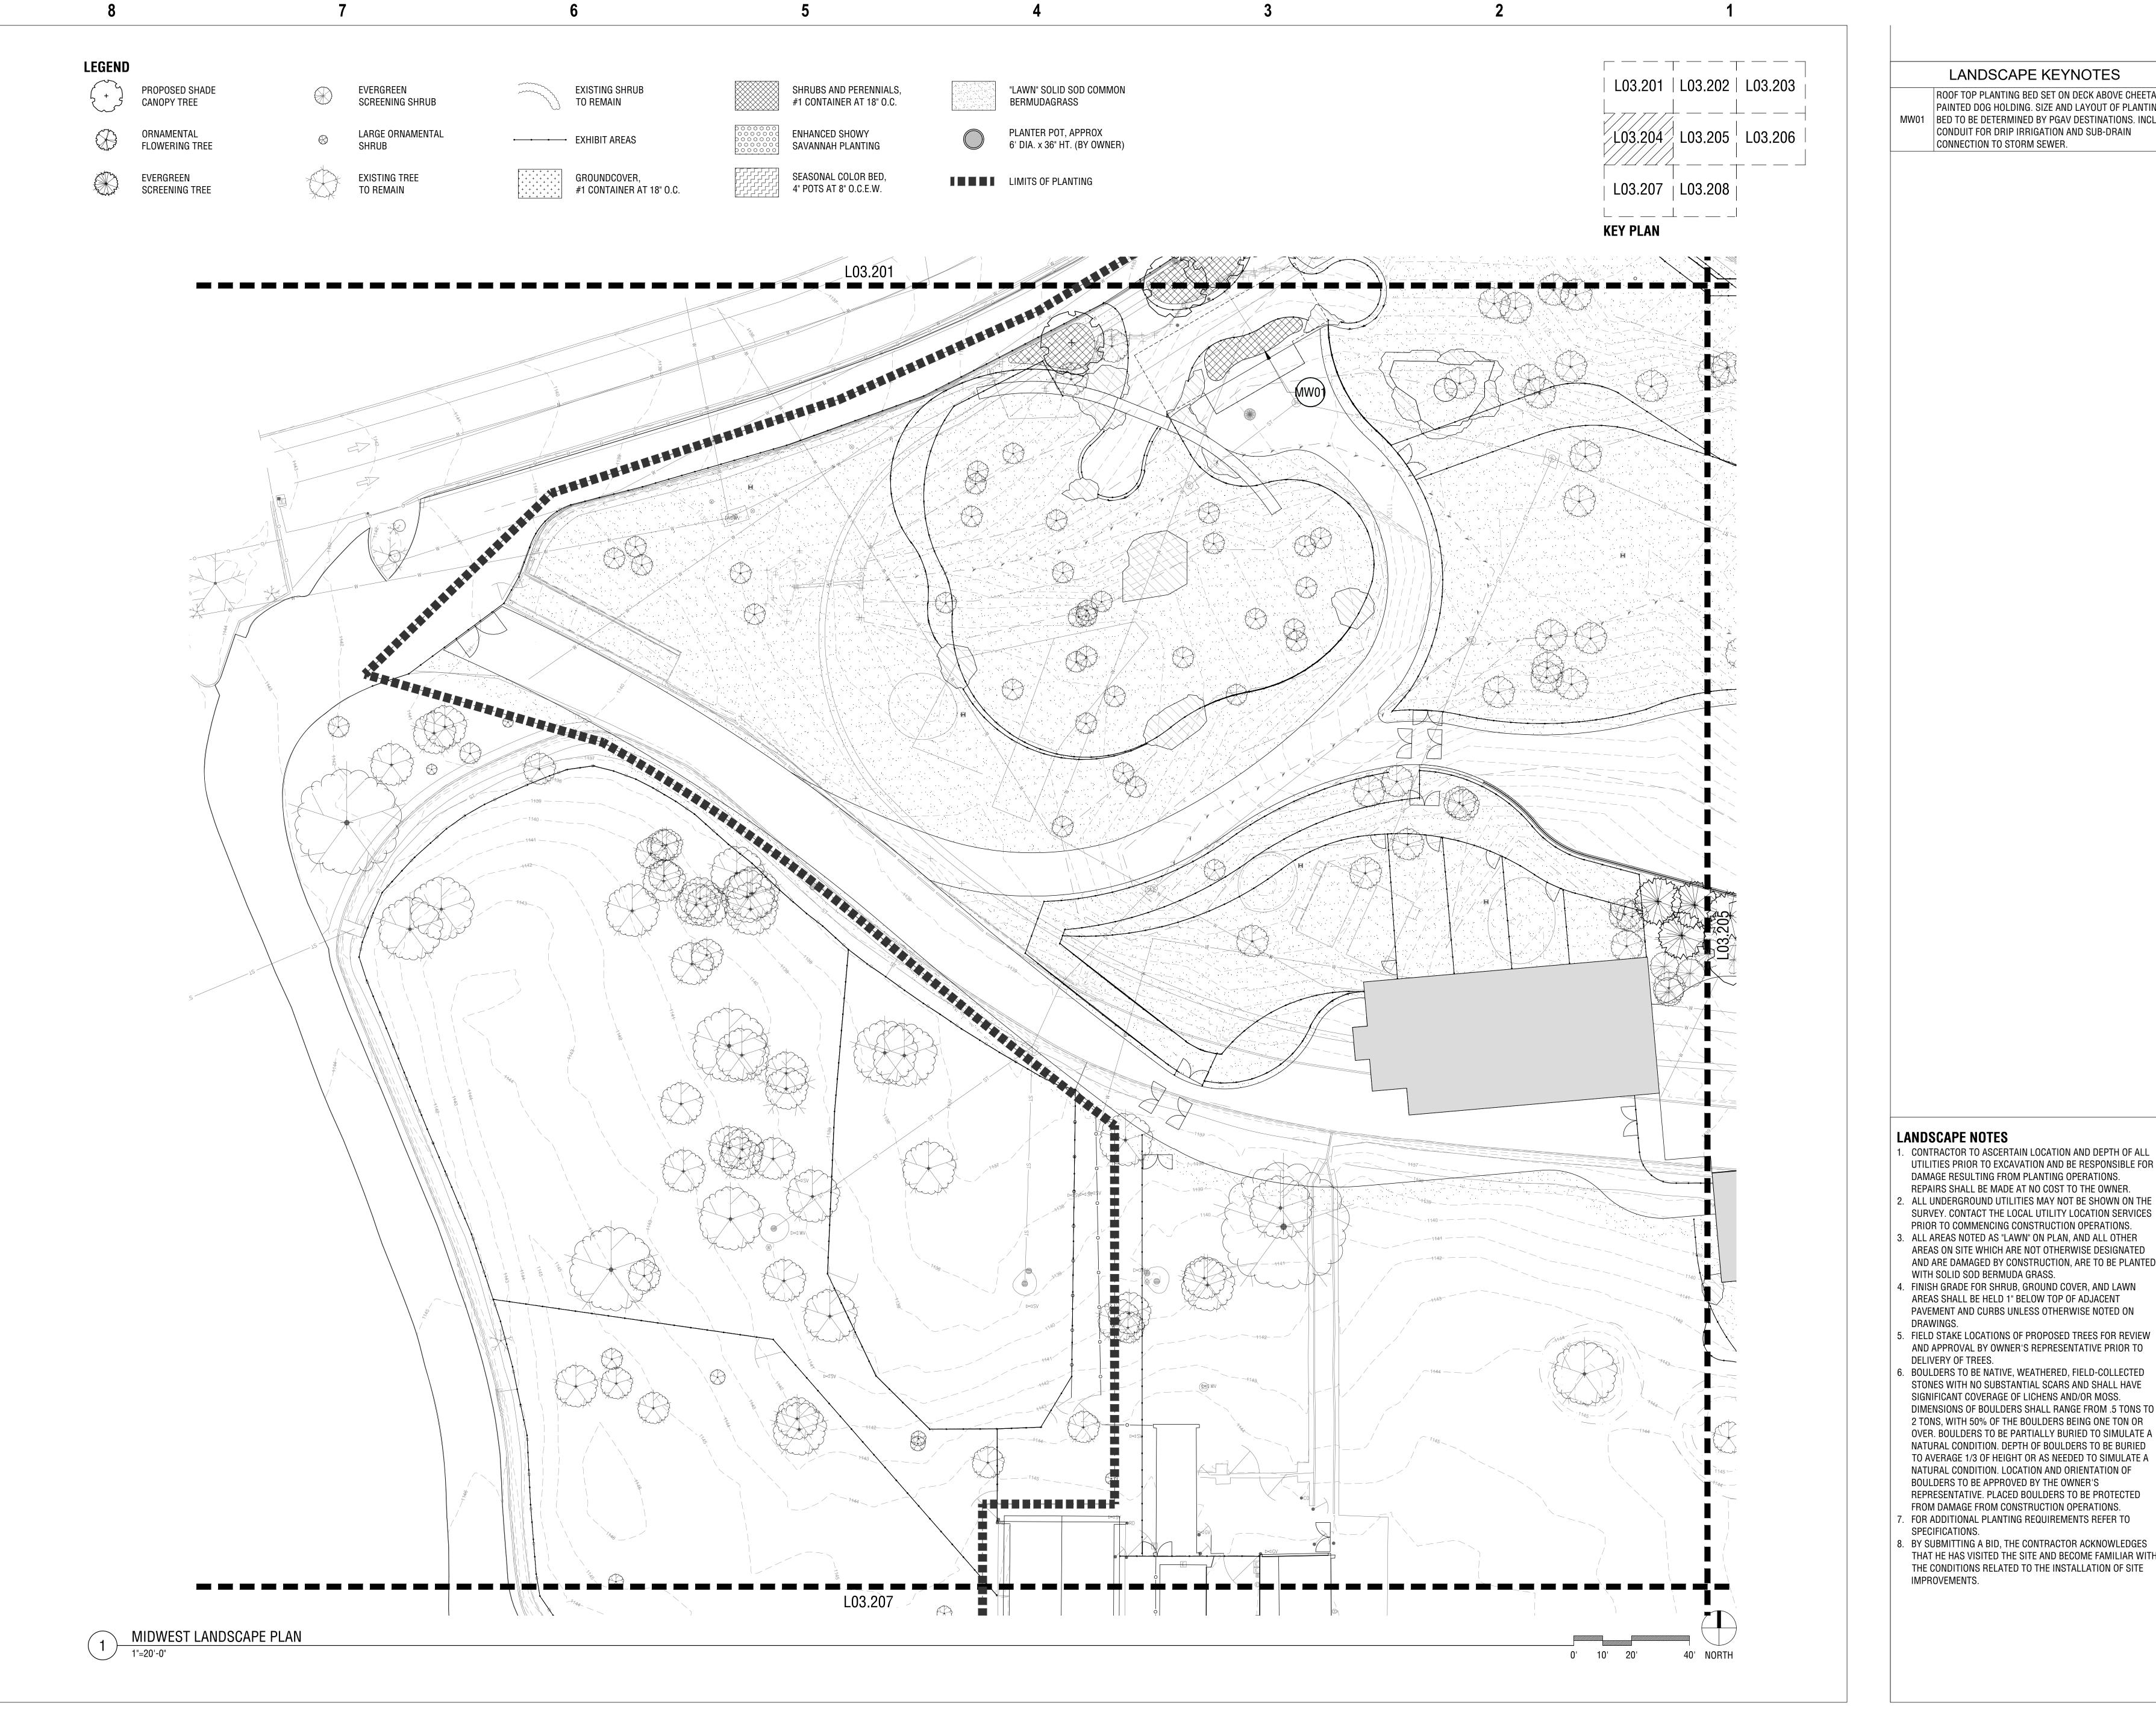

LANDSCAPE KEYNOTES

ROOF TOP PLANTING BED SET ON DECK ABOVE CHEETAH / PAINTED DOG HOLDING. SIZE AND LAYOUT OF PLANTING MW01 | BED TO BE DETERMINED BY PGAV DESTINATIONS. INCLUDE CONDUIT FOR DRIP IRRIGATION AND SUB-DRAIN CONNECTION TO STORM SEWER.





nowell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howelivancuren.com

Landscape Architects

Accessibility for Persons with Disabilities: This drawing contains layouts and elements ritical to providing Access for Disabled
Persons. Contractor shall provide verification
and certification of Compliance with the
applicable accessibility regulations.

. CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.

- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. . ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER
- AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN
- AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON DRAWINGS. . FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW
- AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED
- FROM DAMAGE FROM CONSTRUCTION OPERATIONS. FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO SPECIFICATIONS.
- B. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.




AFRICA-THEMED SAVANNAH **EXHIBITS** Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A

> MIDWEST LANDSCAPE PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT SHEET NUMBER

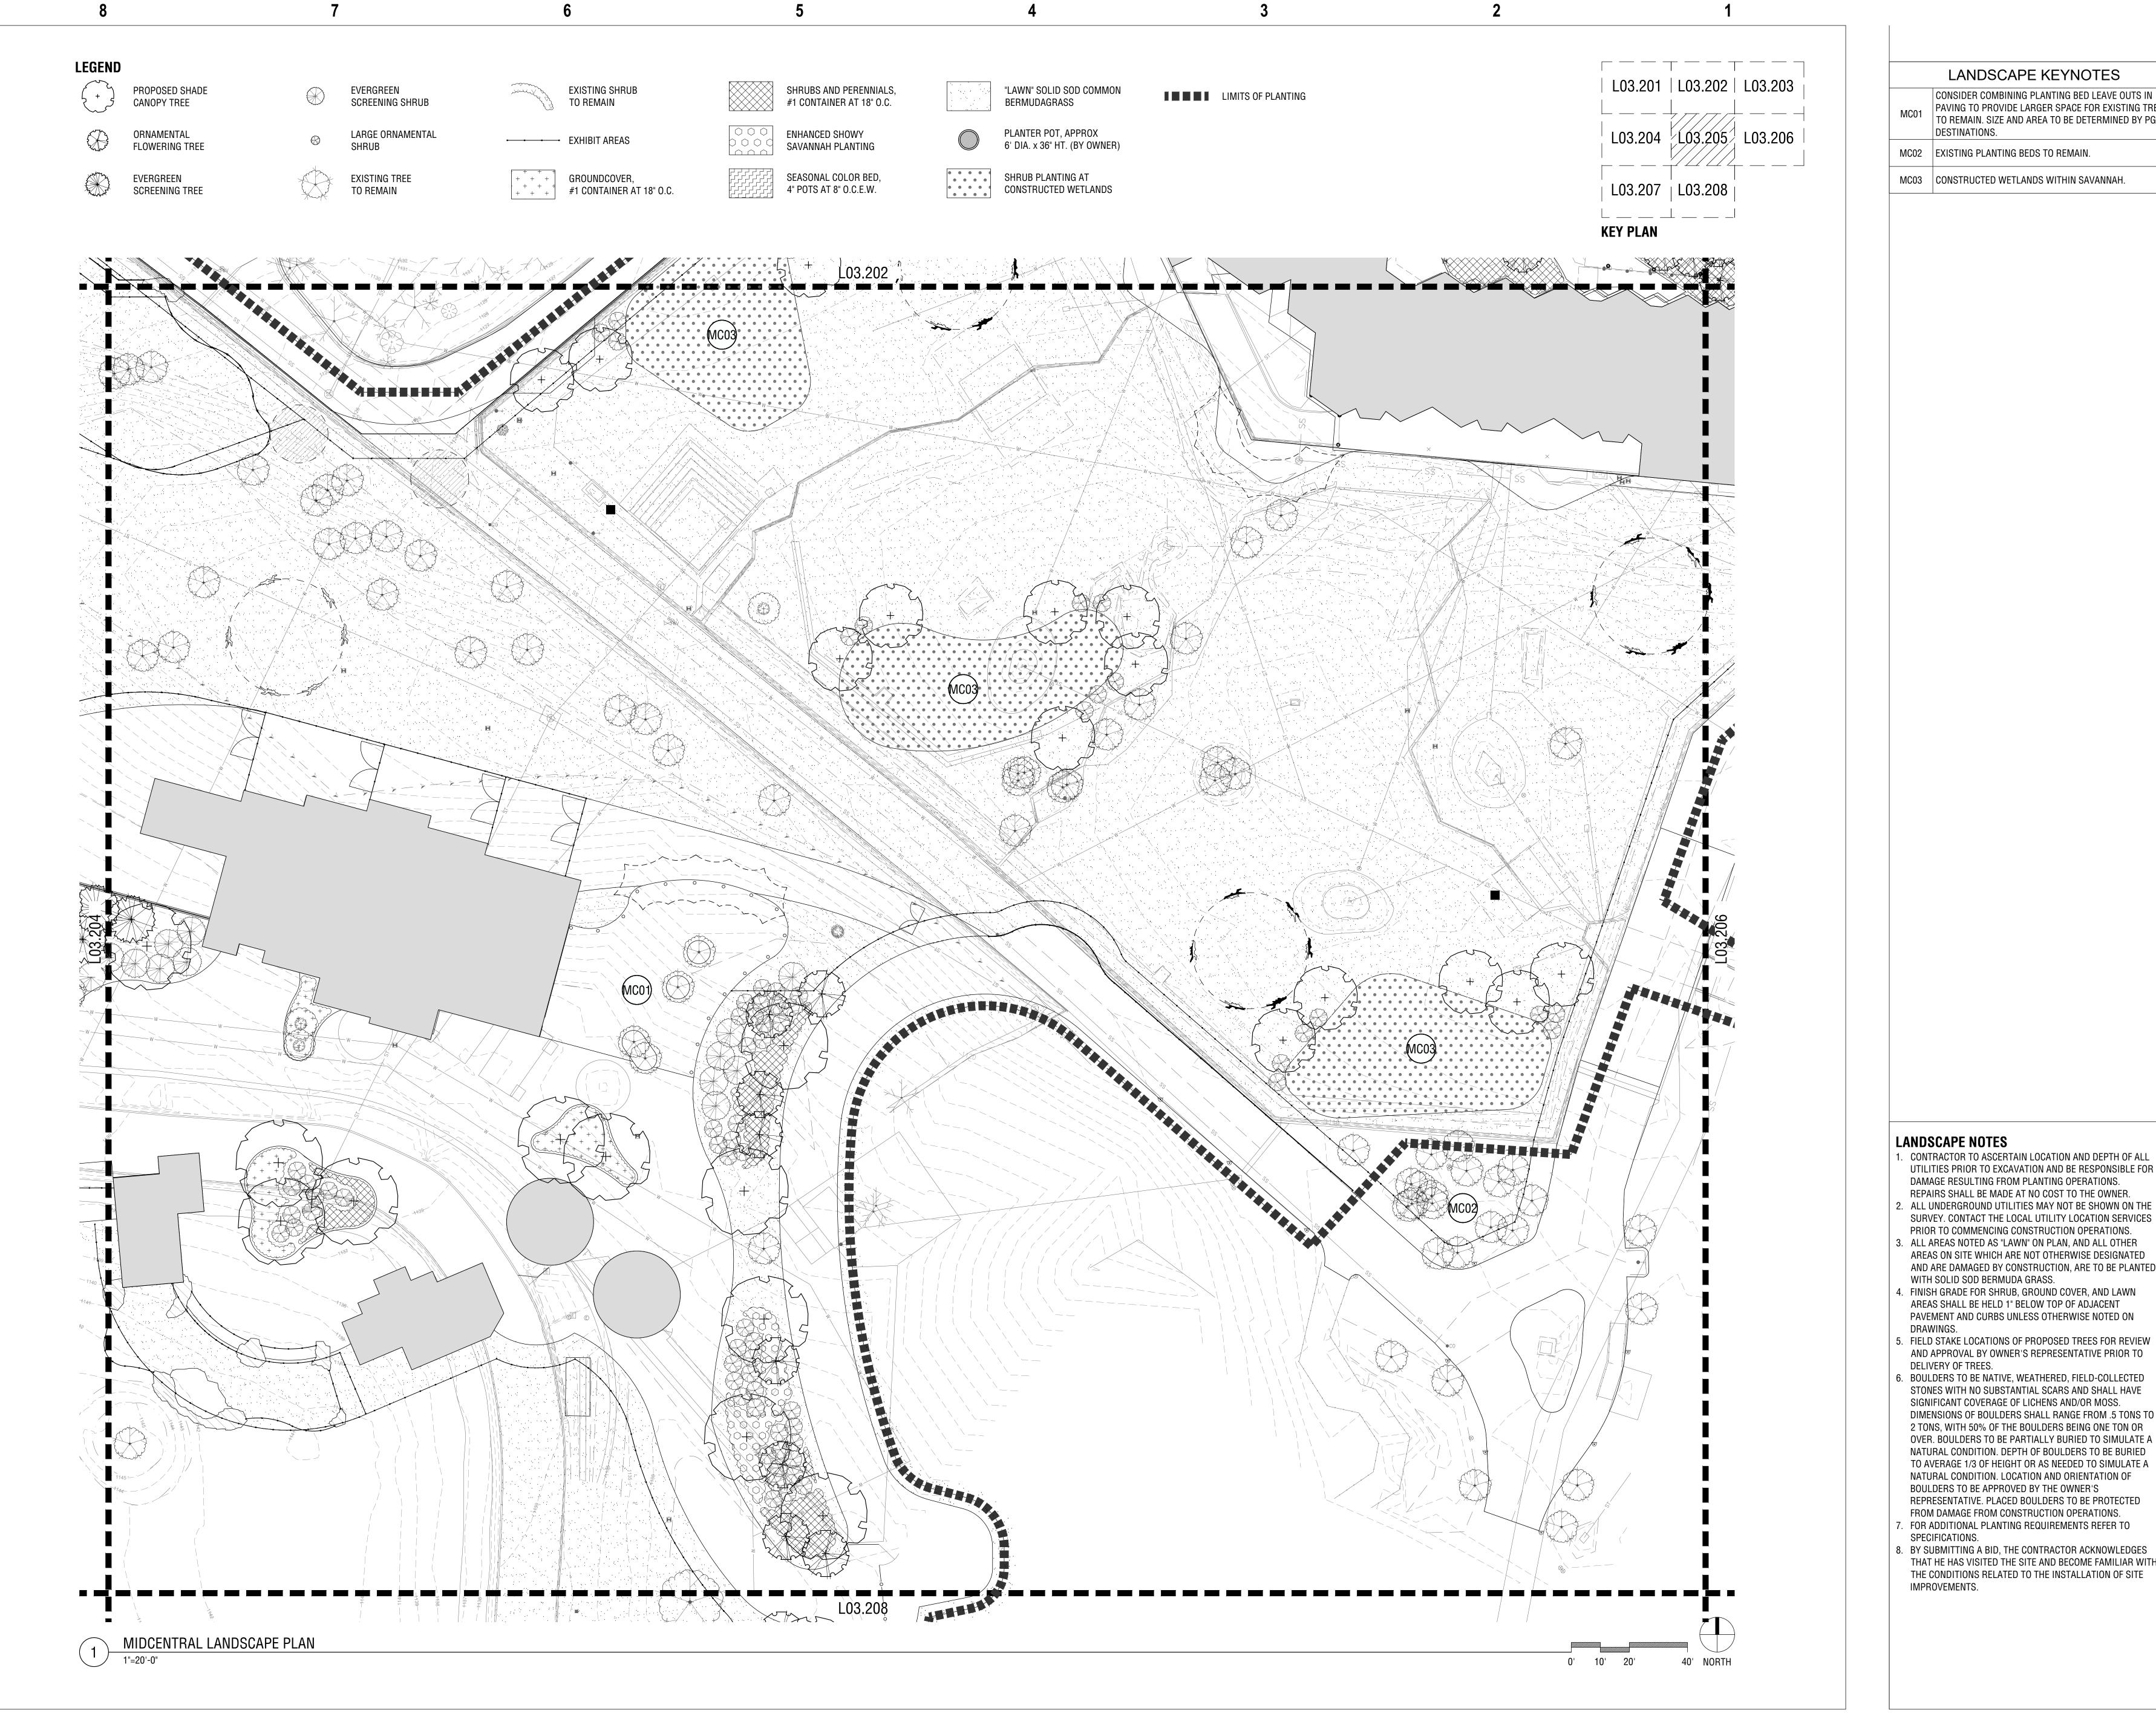

LANDSCAPE KEYNOTES

CONSIDER COMBINING PLANTING BED LEAVE OUTS IN PAVING TO PROVIDE LARGER SPACE FOR EXISTING TREES TO REMAIN. SIZE AND AREA TO BE DETERMINED BY PGAV DESTINATIONS.

MC02 EXISTING PLANTING BEDS TO REMAIN.

MC03 | CONSTRUCTED WETLANDS WITHIN SAVANNAH.





918.592.1270 phone howellvancuren.com

nowell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104

This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification

and certification of Compliance with the

LANDSCAPE NOTES . CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.

SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. . ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED

- AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED
- NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED FROM DAMAGE FROM CONSTRUCTION OPERATIONS. FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO
- SPECIFICATIONS. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.



ORIENTATION PLAZA AND AFRICA-THEMED SAVANNAH **EXHIBITS**

Oklahoma City,


SCHEMATIC DESIGN SERVICES - TASK 1A

MIDCENTRAL LANDSCAPE PLAN

01/28/2020 RWR PGAV 77022-00 CLIENT SHEET NUMBER







Landscape Architects

howell&vancurer


601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellyancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

. CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS. REPAIRS SHALL BE MADE AT NO COST TO THE OWNER.

SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. . ALL AREAS NOTED AS "LAWN" ON PLAN, AND ALL OTHER AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED

- WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- . FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO
- STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S
- REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED FROM DAMAGE FROM CONSTRUCTION OPERATIONS. . FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO
- 8. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.



EXHIBITS


Oklahoma City,

SERVICES - TASK 1A

SCHEMATIC DESIGN

MIDEAST LANDSCAPE PLAN 01/28/2020 R CK SLH


PGAV CLIENT OKCZOO SHEET NUMBER

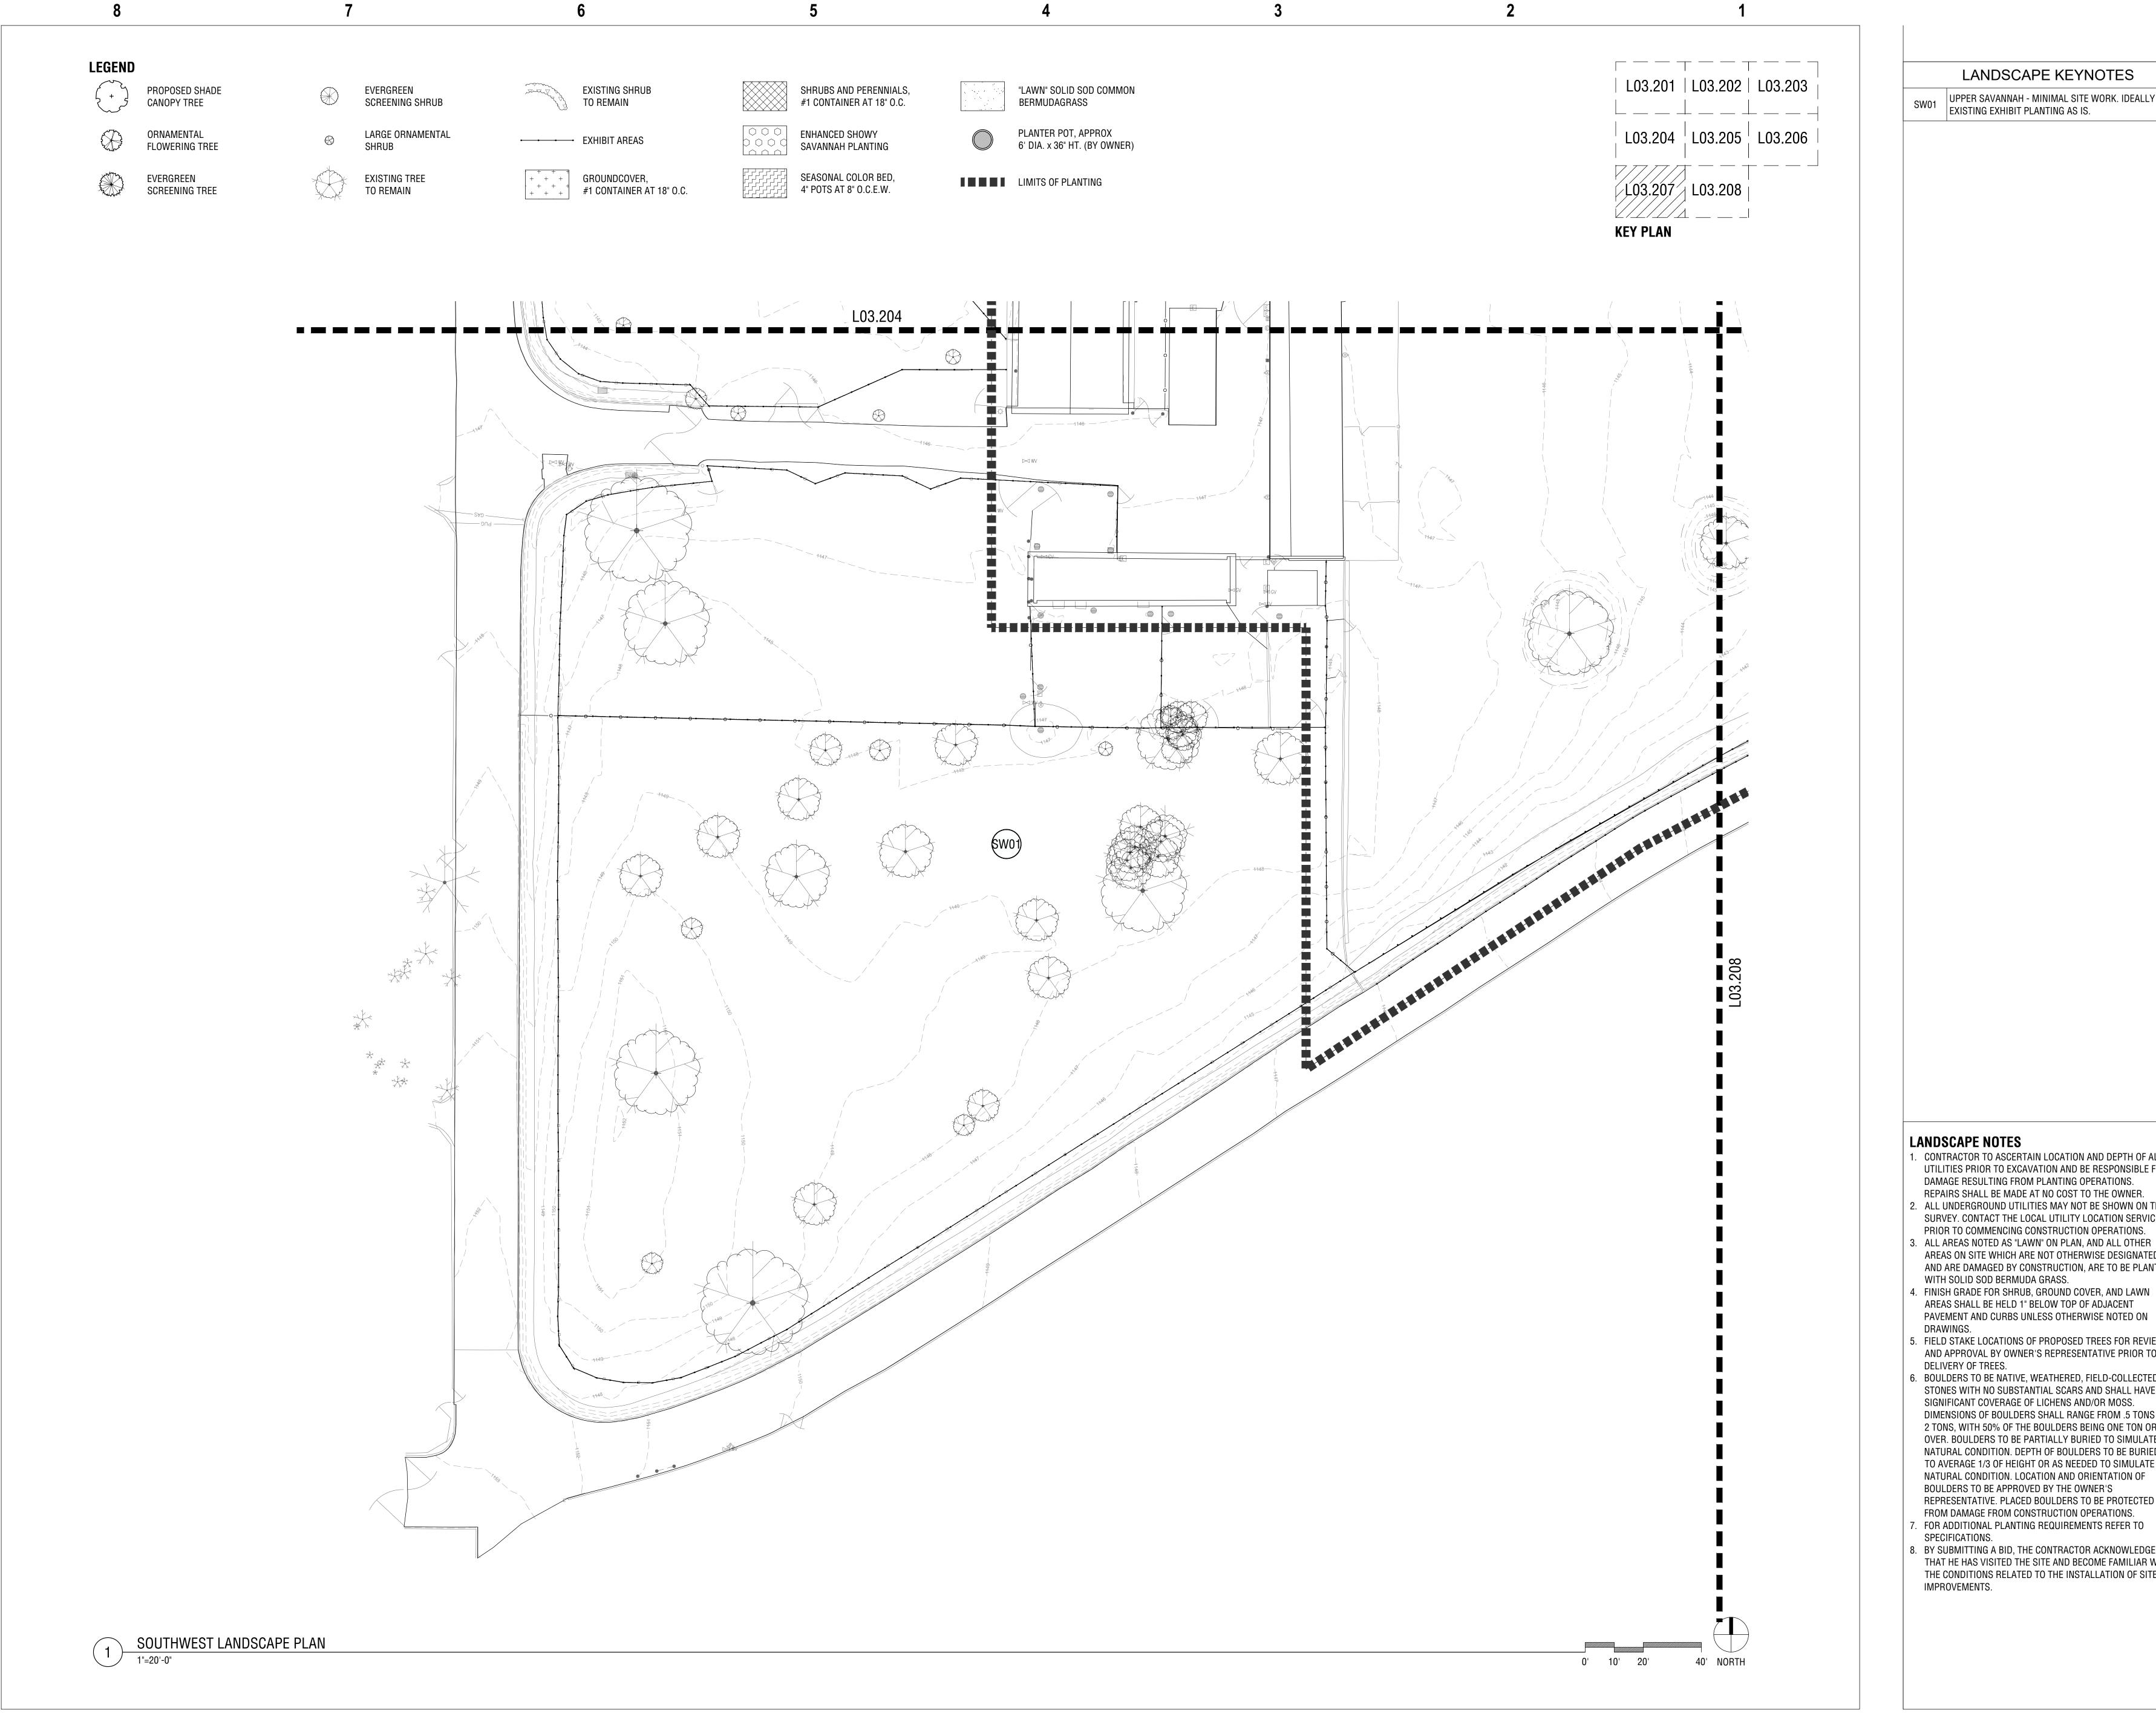

LANDSCAPE KEYNOTES

UPPER SAVANNAH - MINIMAL SITE WORK. IDEALLY KEEP EXISTING EXHIBIT PLANTING AS IS.





Landscape Architects

howell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellyancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

LANDSCAPE NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.
- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS.
- AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN
- AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- . FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED
- FROM DAMAGE FROM CONSTRUCTION OPERATIONS. . FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO
- 8. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE



OKLAHOMA CITY


BOTANICAL GARDEN

Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A

SOUTHWEST LANDSCAPE PLAN 01/28/2020


RWR PGAV 77022-00 CLIENT OKCZOO SHEET NUMBER

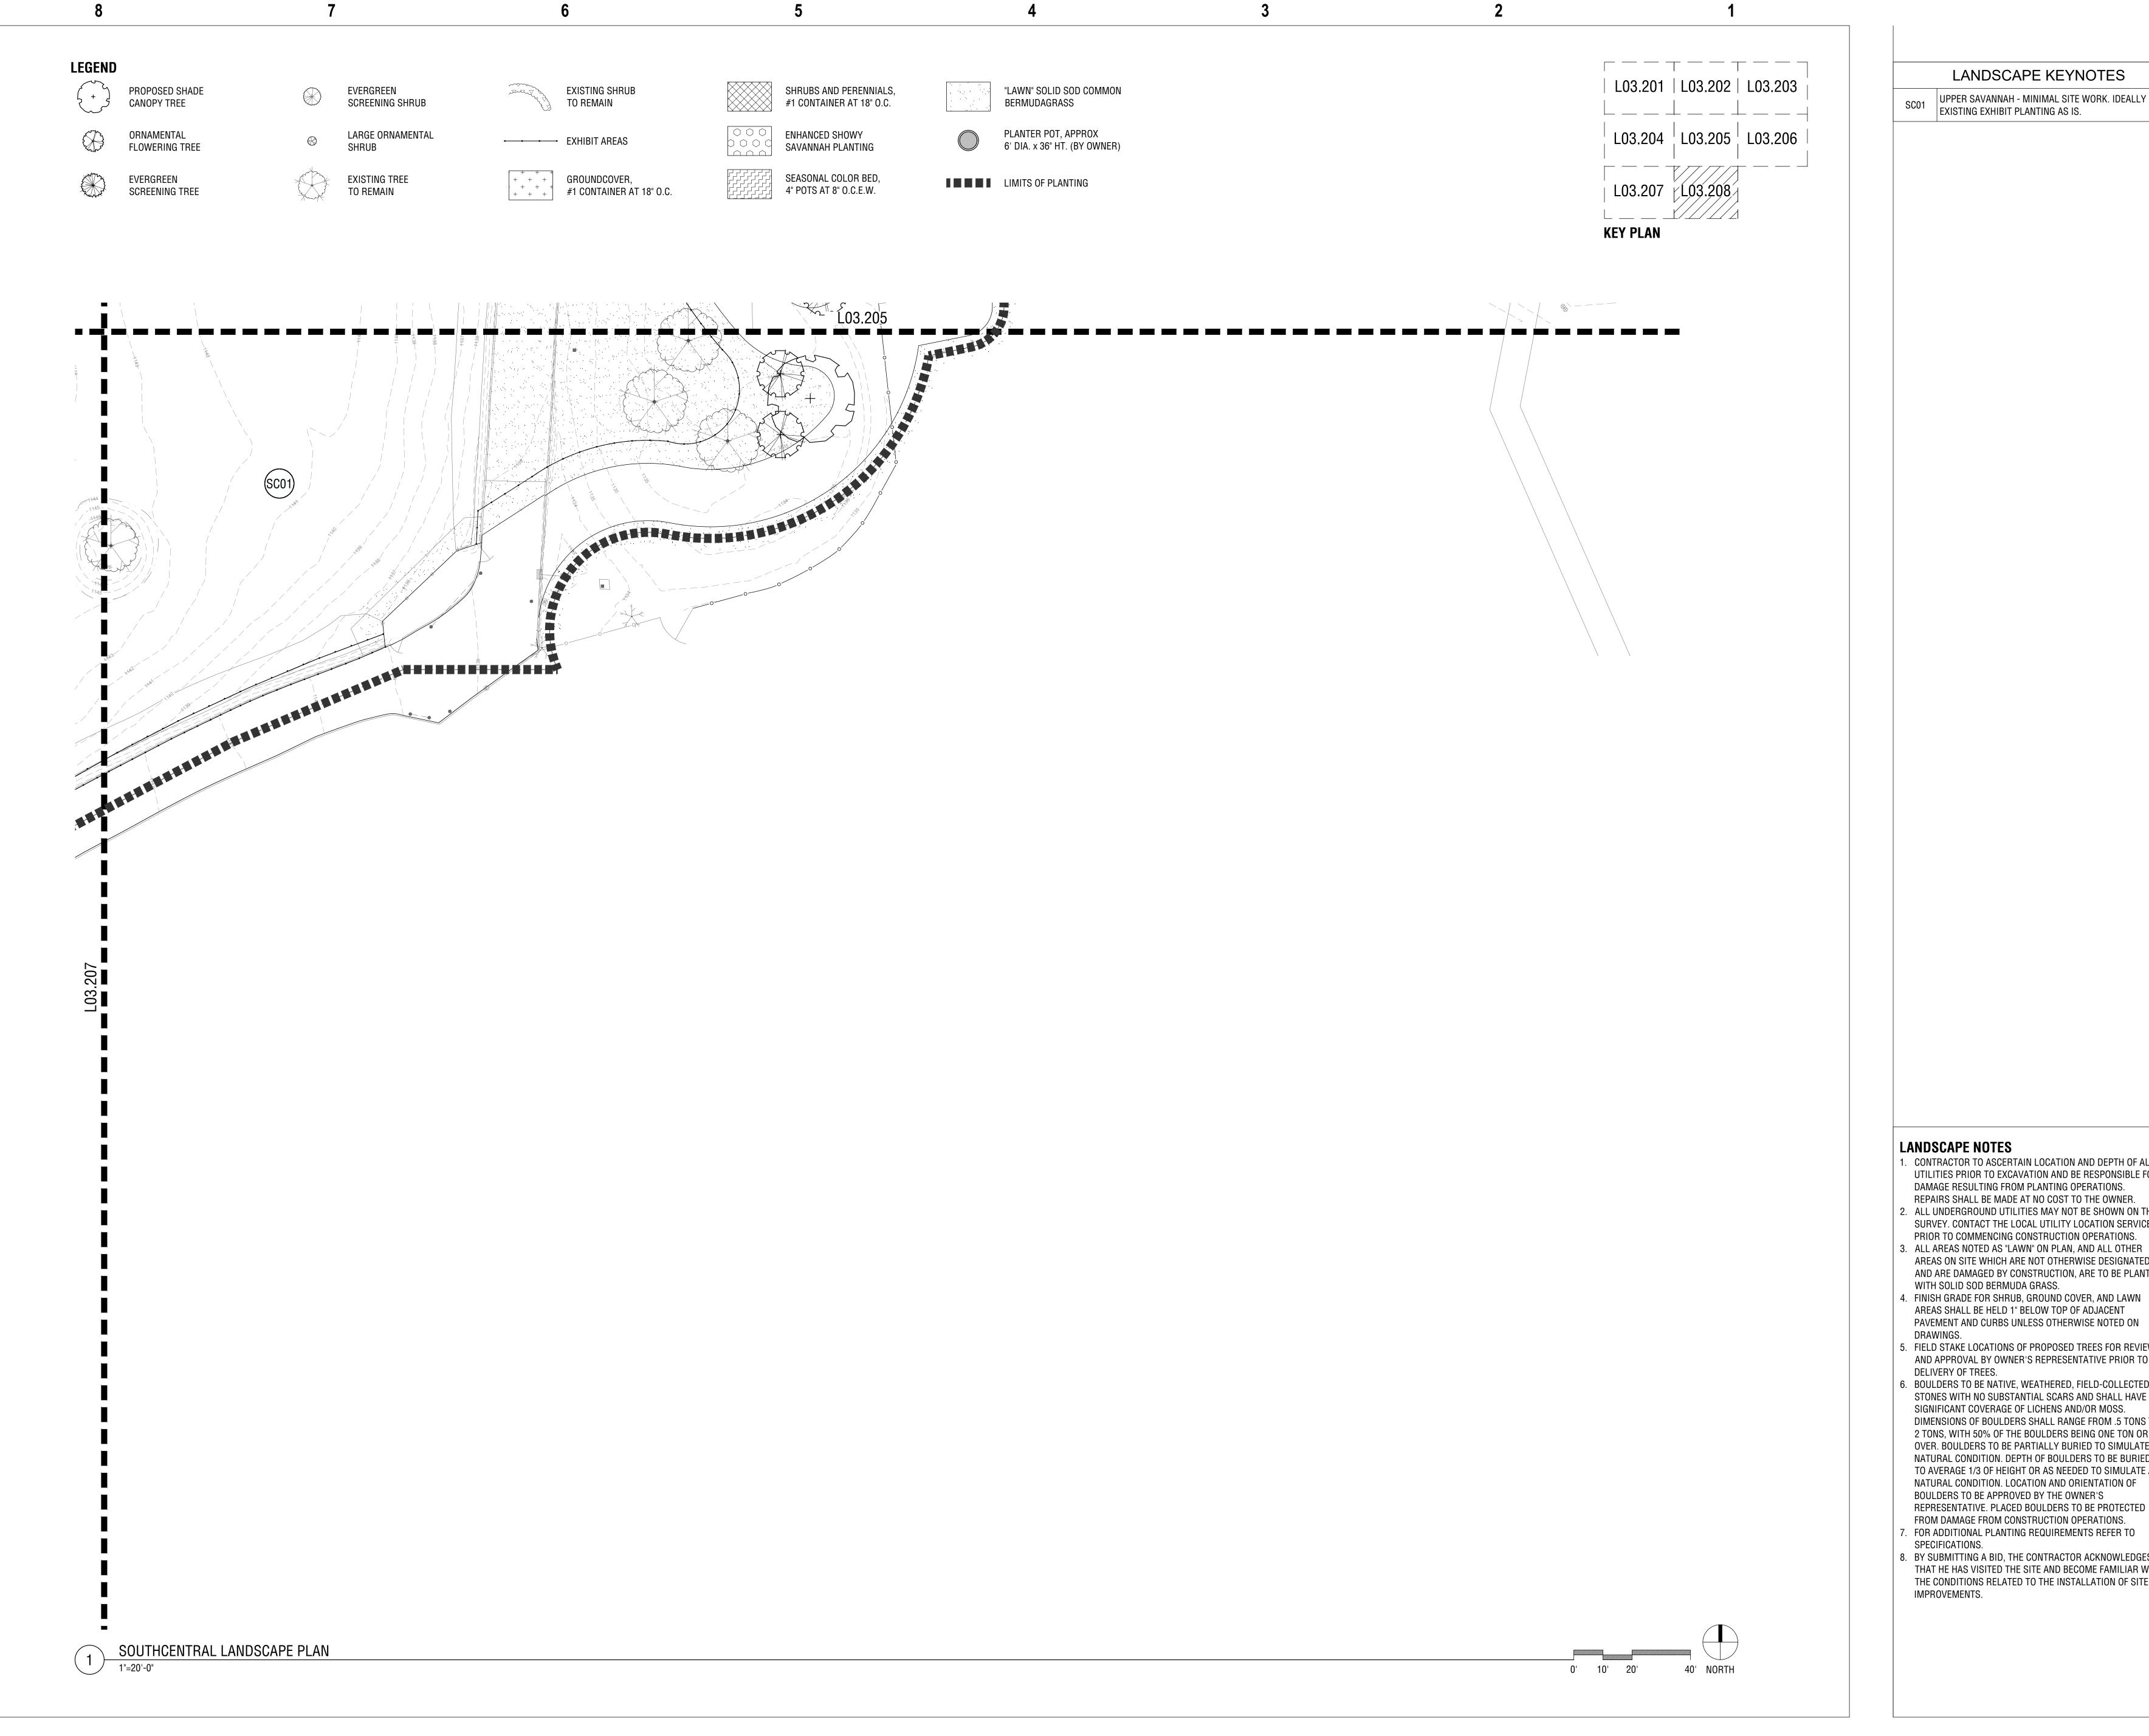

LANDSCAPE KEYNOTES

UPPER SAVANNAH - MINIMAL SITE WORK. IDEALLY KEEP EXISTING EXHIBIT PLANTING AS IS.





Landscape Architects

howell&vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM PLANTING OPERATIONS.
- ALL UNDERGROUND UTILITIES MAY NOT BE SHOWN ON THE SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS.
- AREAS ON SITE WHICH ARE NOT OTHERWISE DESIGNATED AND ARE DAMAGED BY CONSTRUCTION, ARE TO BE PLANTED WITH SOLID SOD BERMUDA GRASS. . FINISH GRADE FOR SHRUB, GROUND COVER, AND LAWN
- AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENT AND CURBS UNLESS OTHERWISE NOTED ON
- 5. FIELD STAKE LOCATIONS OF PROPOSED TREES FOR REVIEW AND APPROVAL BY OWNER'S REPRESENTATIVE PRIOR TO DELIVERY OF TREES.
- BOULDERS TO BE NATIVE, WEATHERED, FIELD-COLLECTED STONES WITH NO SUBSTANTIAL SCARS AND SHALL HAVE SIGNIFICANT COVERAGE OF LICHENS AND/OR MOSS. DIMENSIONS OF BOULDERS SHALL RANGE FROM .5 TONS TO 2 TONS, WITH 50% OF THE BOULDERS BEING ONE TON OR OVER. BOULDERS TO BE PARTIALLY BURIED TO SIMULATE A NATURAL CONDITION. DEPTH OF BOULDERS TO BE BURIED TO AVERAGE 1/3 OF HEIGHT OR AS NEEDED TO SIMULATE A NATURAL CONDITION. LOCATION AND ORIENTATION OF BOULDERS TO BE APPROVED BY THE OWNER'S REPRESENTATIVE. PLACED BOULDERS TO BE PROTECTED
- FROM DAMAGE FROM CONSTRUCTION OPERATIONS. . FOR ADDITIONAL PLANTING REQUIREMENTS REFER TO
- 8. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.




AFRICA-THEMED SAVANNAH **EXHIBITS** Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A

SOUTHCENTRAL LANDSCAPE PLAN

SHEET NUMBER

01/28/2020 R CK SLH PGAV CLIENT OKCZOO

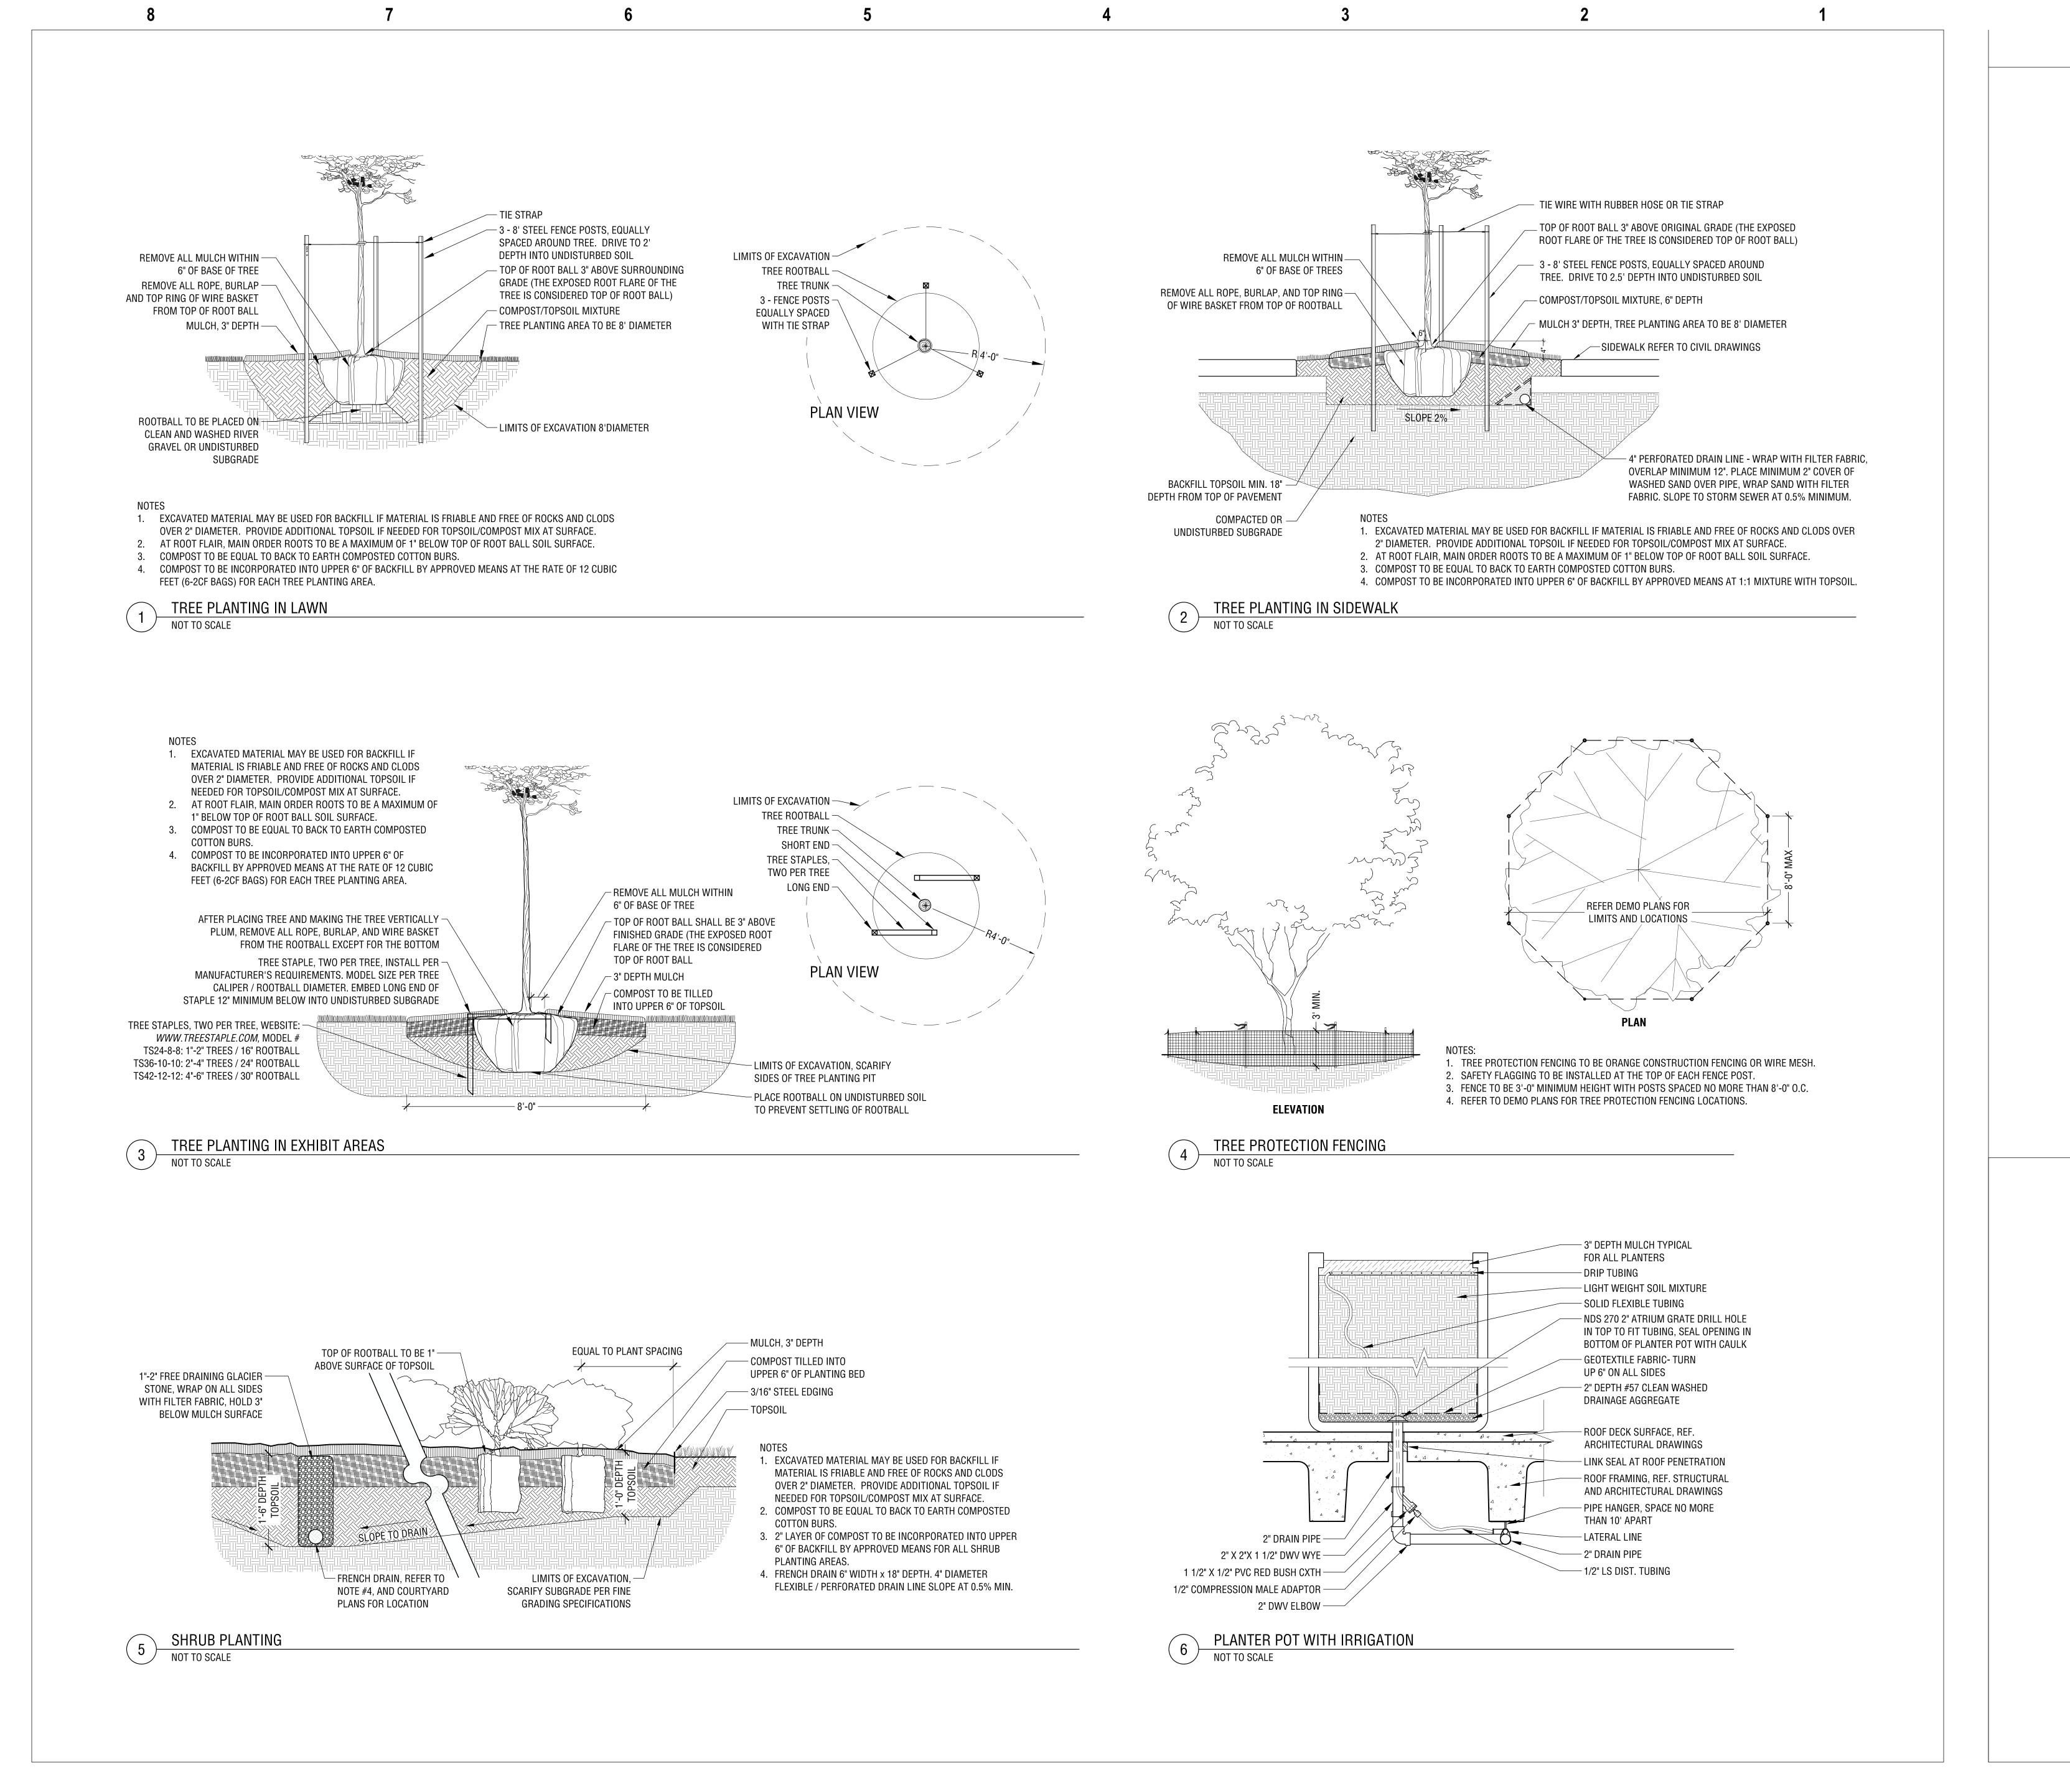

DESTINATIONS
PECKHAM GUYTON ALBERS & VIETS, INC.
200 North Broadway, Sulle 1000, St. Louis, MO 63102
(314) 231-7318 WWW.PGAV.COM

THE SEAL AND SIGNATURE APPLY ONLY TO THE
DOCUMENT TO WHICH THEY ARE AFRIXED, AND
EXPRESSY DISCUMMENT FOR MAIL EXPRESSY DISCUMENT ON INSTRUMENTS RELATING TO
OR INTERDED TO BE USED FOR ANY PART OF PARTS OF
THE ARCHITECTURAL OR ENGINEERING PROJECT

Landscape Architects

601 South Lewis Avenue
Tulsa, Oklahoma 74104
918.592.1270 phone
howellvancuren.com

Accessibility for Persons with Disabilities:
This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.



LANDSCAPE

01/28/2020


L03.209

CLIENT


RWR

PGAV 77022-00

SHEET NUMBER

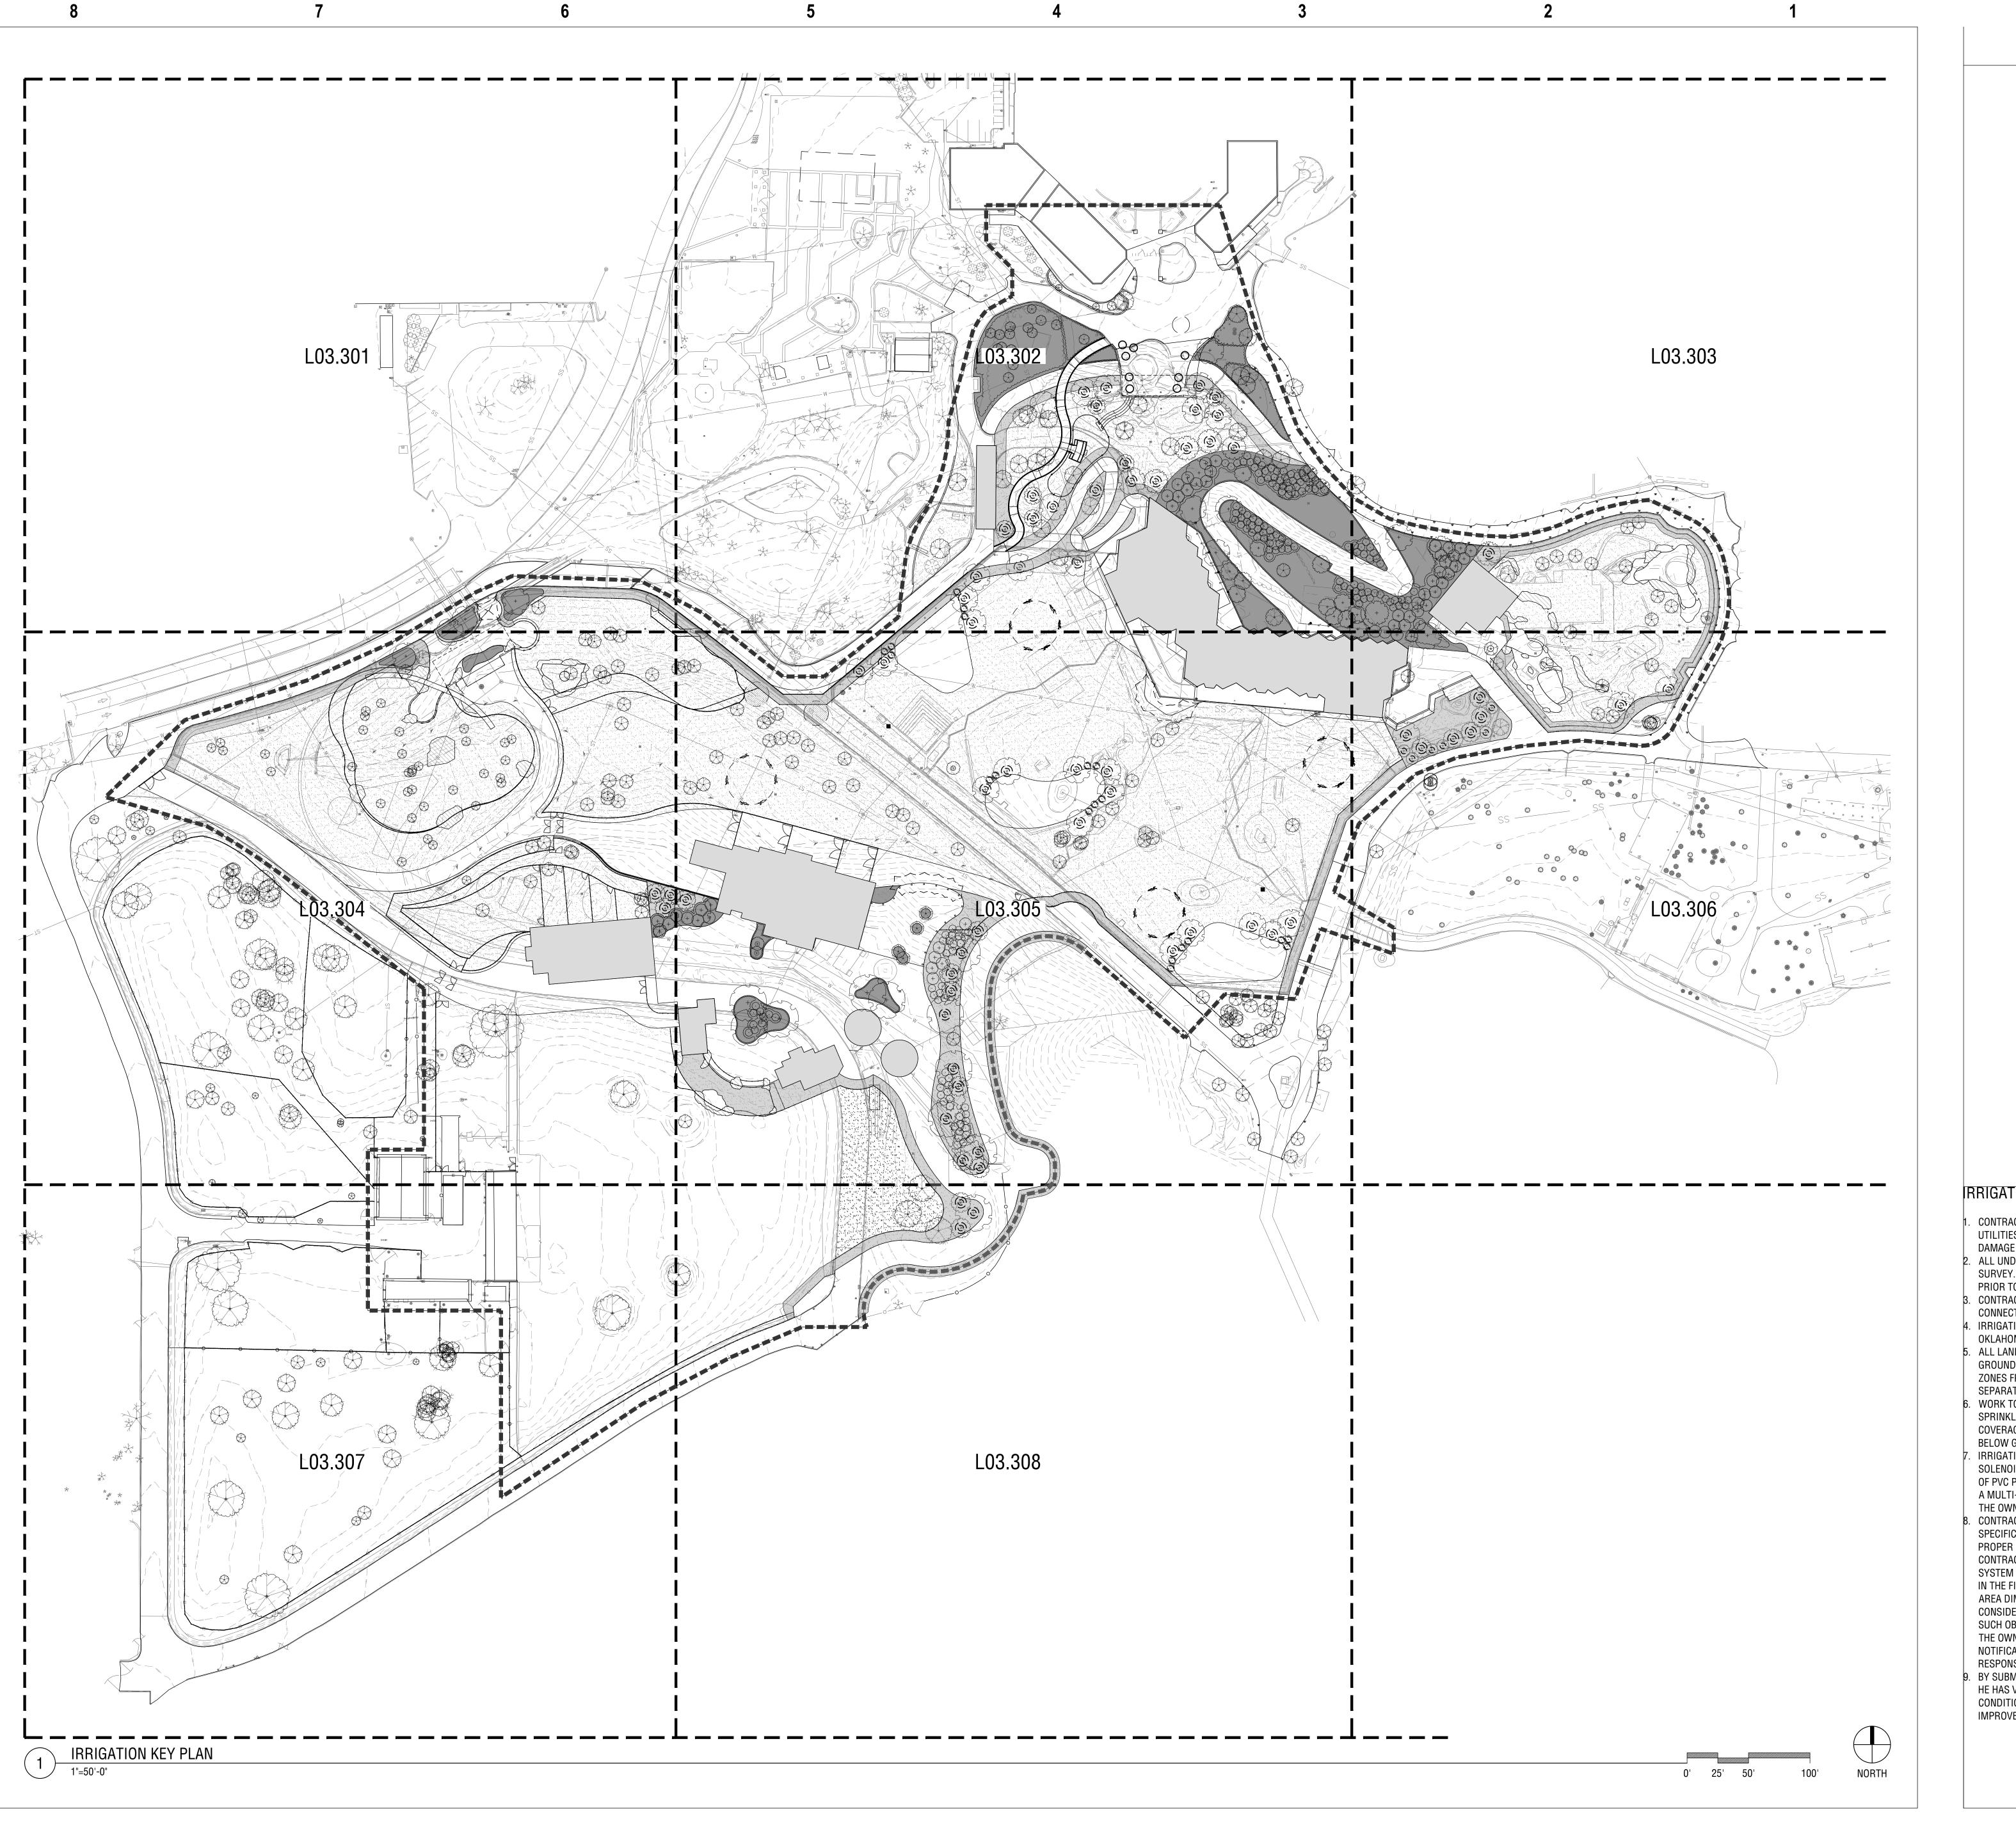





THE SEAL AND SIGNATURE APPLY ONLY TO THE DOCUMENT TO WHICH THEY ARE AFFIXED, AND EXPRESSLY DISCLAIM ANY RESPONSIBILITY FOR ALL OTHER PLANS, SPECIFICATIONS, ESTIMATES, REPOOR OTHER DOCUMENTS OR INSTRUMENTS RELATIN

howell & vancuren

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellyancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

RRIGATION NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS.


 ALL UNDERGROUND UTILITIES MAY NOT BE SHOWN ON THE SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS.

 CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION POINT OF CONNECTION
- IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
 ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND
- GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES.

 WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE
- 5. WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED BELOW GRADE PER SPECIFICATIONS.
 7. IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC
- SOLENOID CONTROLLED UNDERGROUND SPRINKLER SYSTEM
 OF PVC PIPE AND FITTINGS, WITH FIXED AND POP-UP HEADS IN
 A MULTI-STATION SYSTEM, PROGRAMMED AS APPROVED BY
 THE OWNER'S REPRESENTATIVE.
- S. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM.

 CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE. IN THE EVENT THIS NOTIFICATION IS NOT PERFORMED, CONTRACTOR ASSUMES RESPONSIBILITY OF ALL REQUIRED REVISIONS.
- RESPONSIBILITY OF ALL REQUIRED REVISIONS.

 BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.

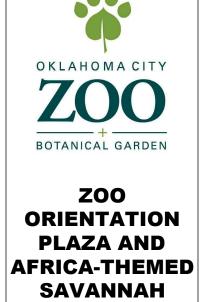

EXHIBITS

Oklahoma City,


SCHEMATIC DESIGN SERVICES - TASK 1A

> IRRIGATION KEY PLAN
>
> 01/28/2020
>
> CK
> JLH


L03.300

SHEET NUMBER

PGAV 77022-00 CLIENT OKCZOO

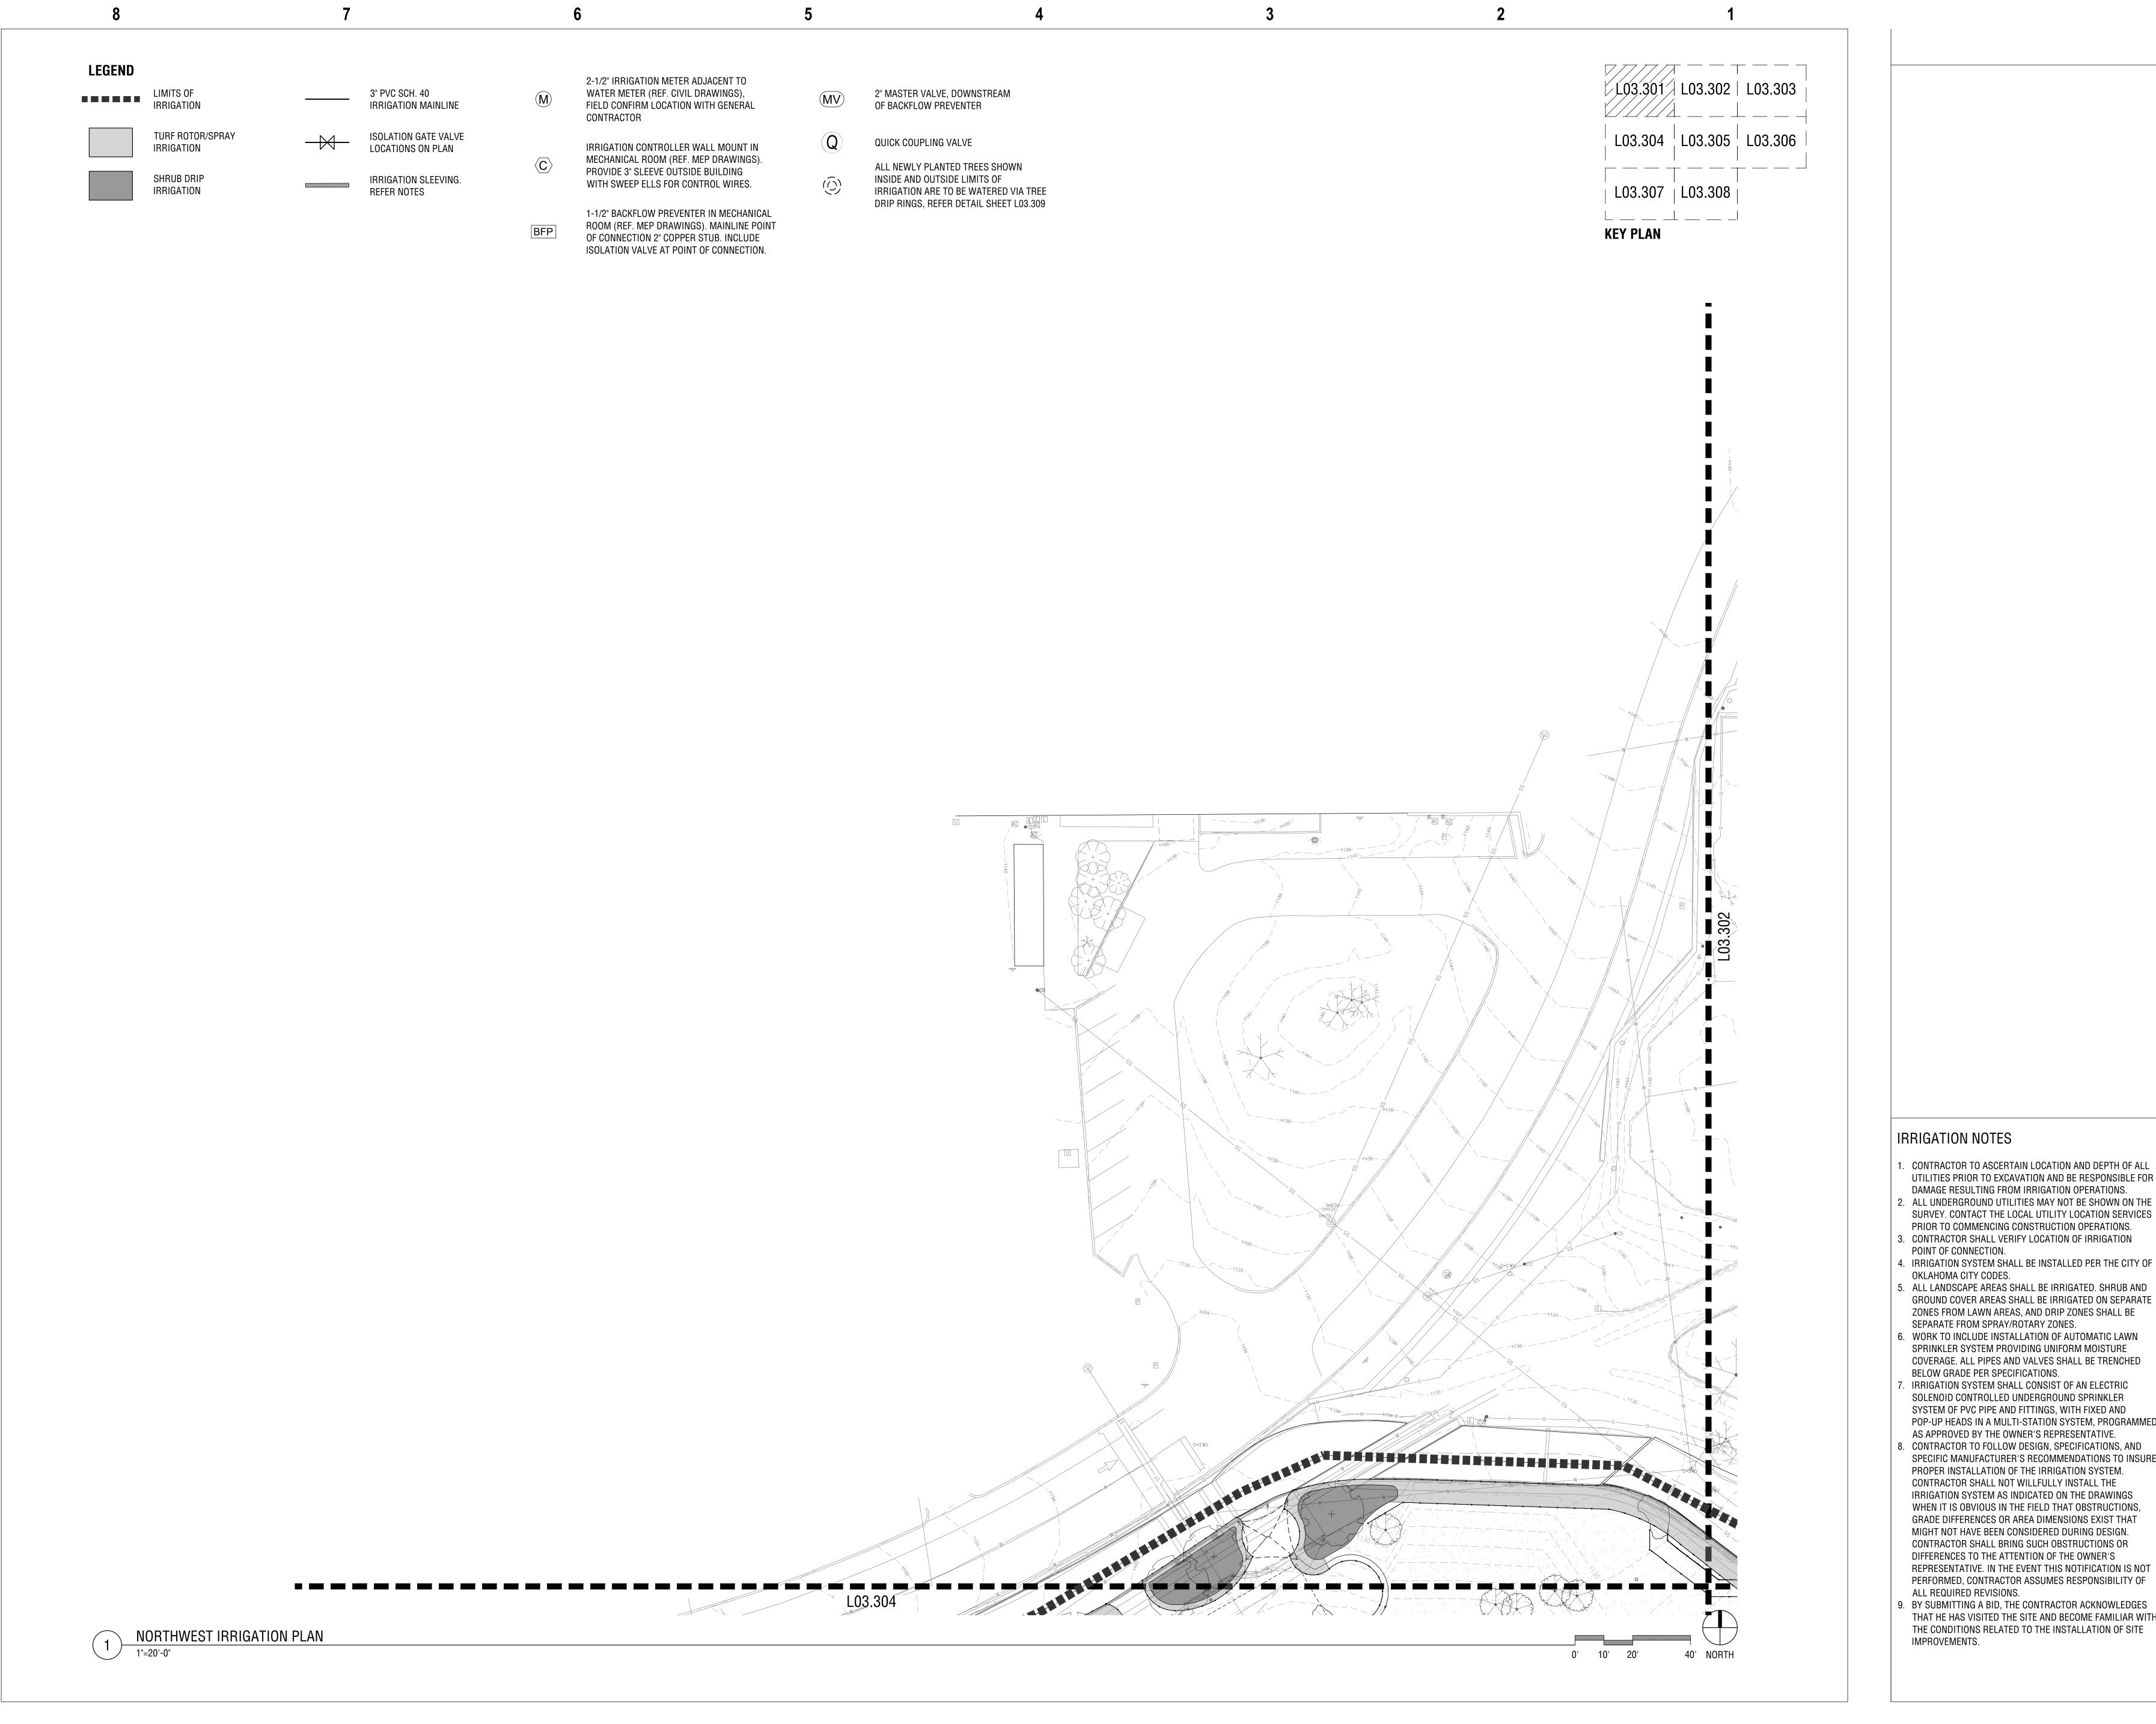





howell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Landscape Architects

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS.
- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION POINT OF CONNECTION.
- IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES. . WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN
- SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED BELOW GRADE PER SPECIFICATIONS.
- IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER SYSTEM OF PVC PIPE AND FITTINGS, WITH FIXED AND POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED AS APPROVED BY THE OWNER'S REPRESENTATIVE.
- 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S
- ALL REQUIRED REVISIONS. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE

BOTANICAL GARDEN **Z00 ORIENTATION** PLAZA AND **AFRICA-THEMED** SAVANNAH

EXHIBITS

Oklahoma City,

OKLAHOMA CITY

NORTHWEST IRRIGATION PLAN

SCHEMATIC DESIGN

SERVICES - TASK 1A


01/28/2020

L03.301

CLIENT

PGAV 77022-00

SHEET NUMBER

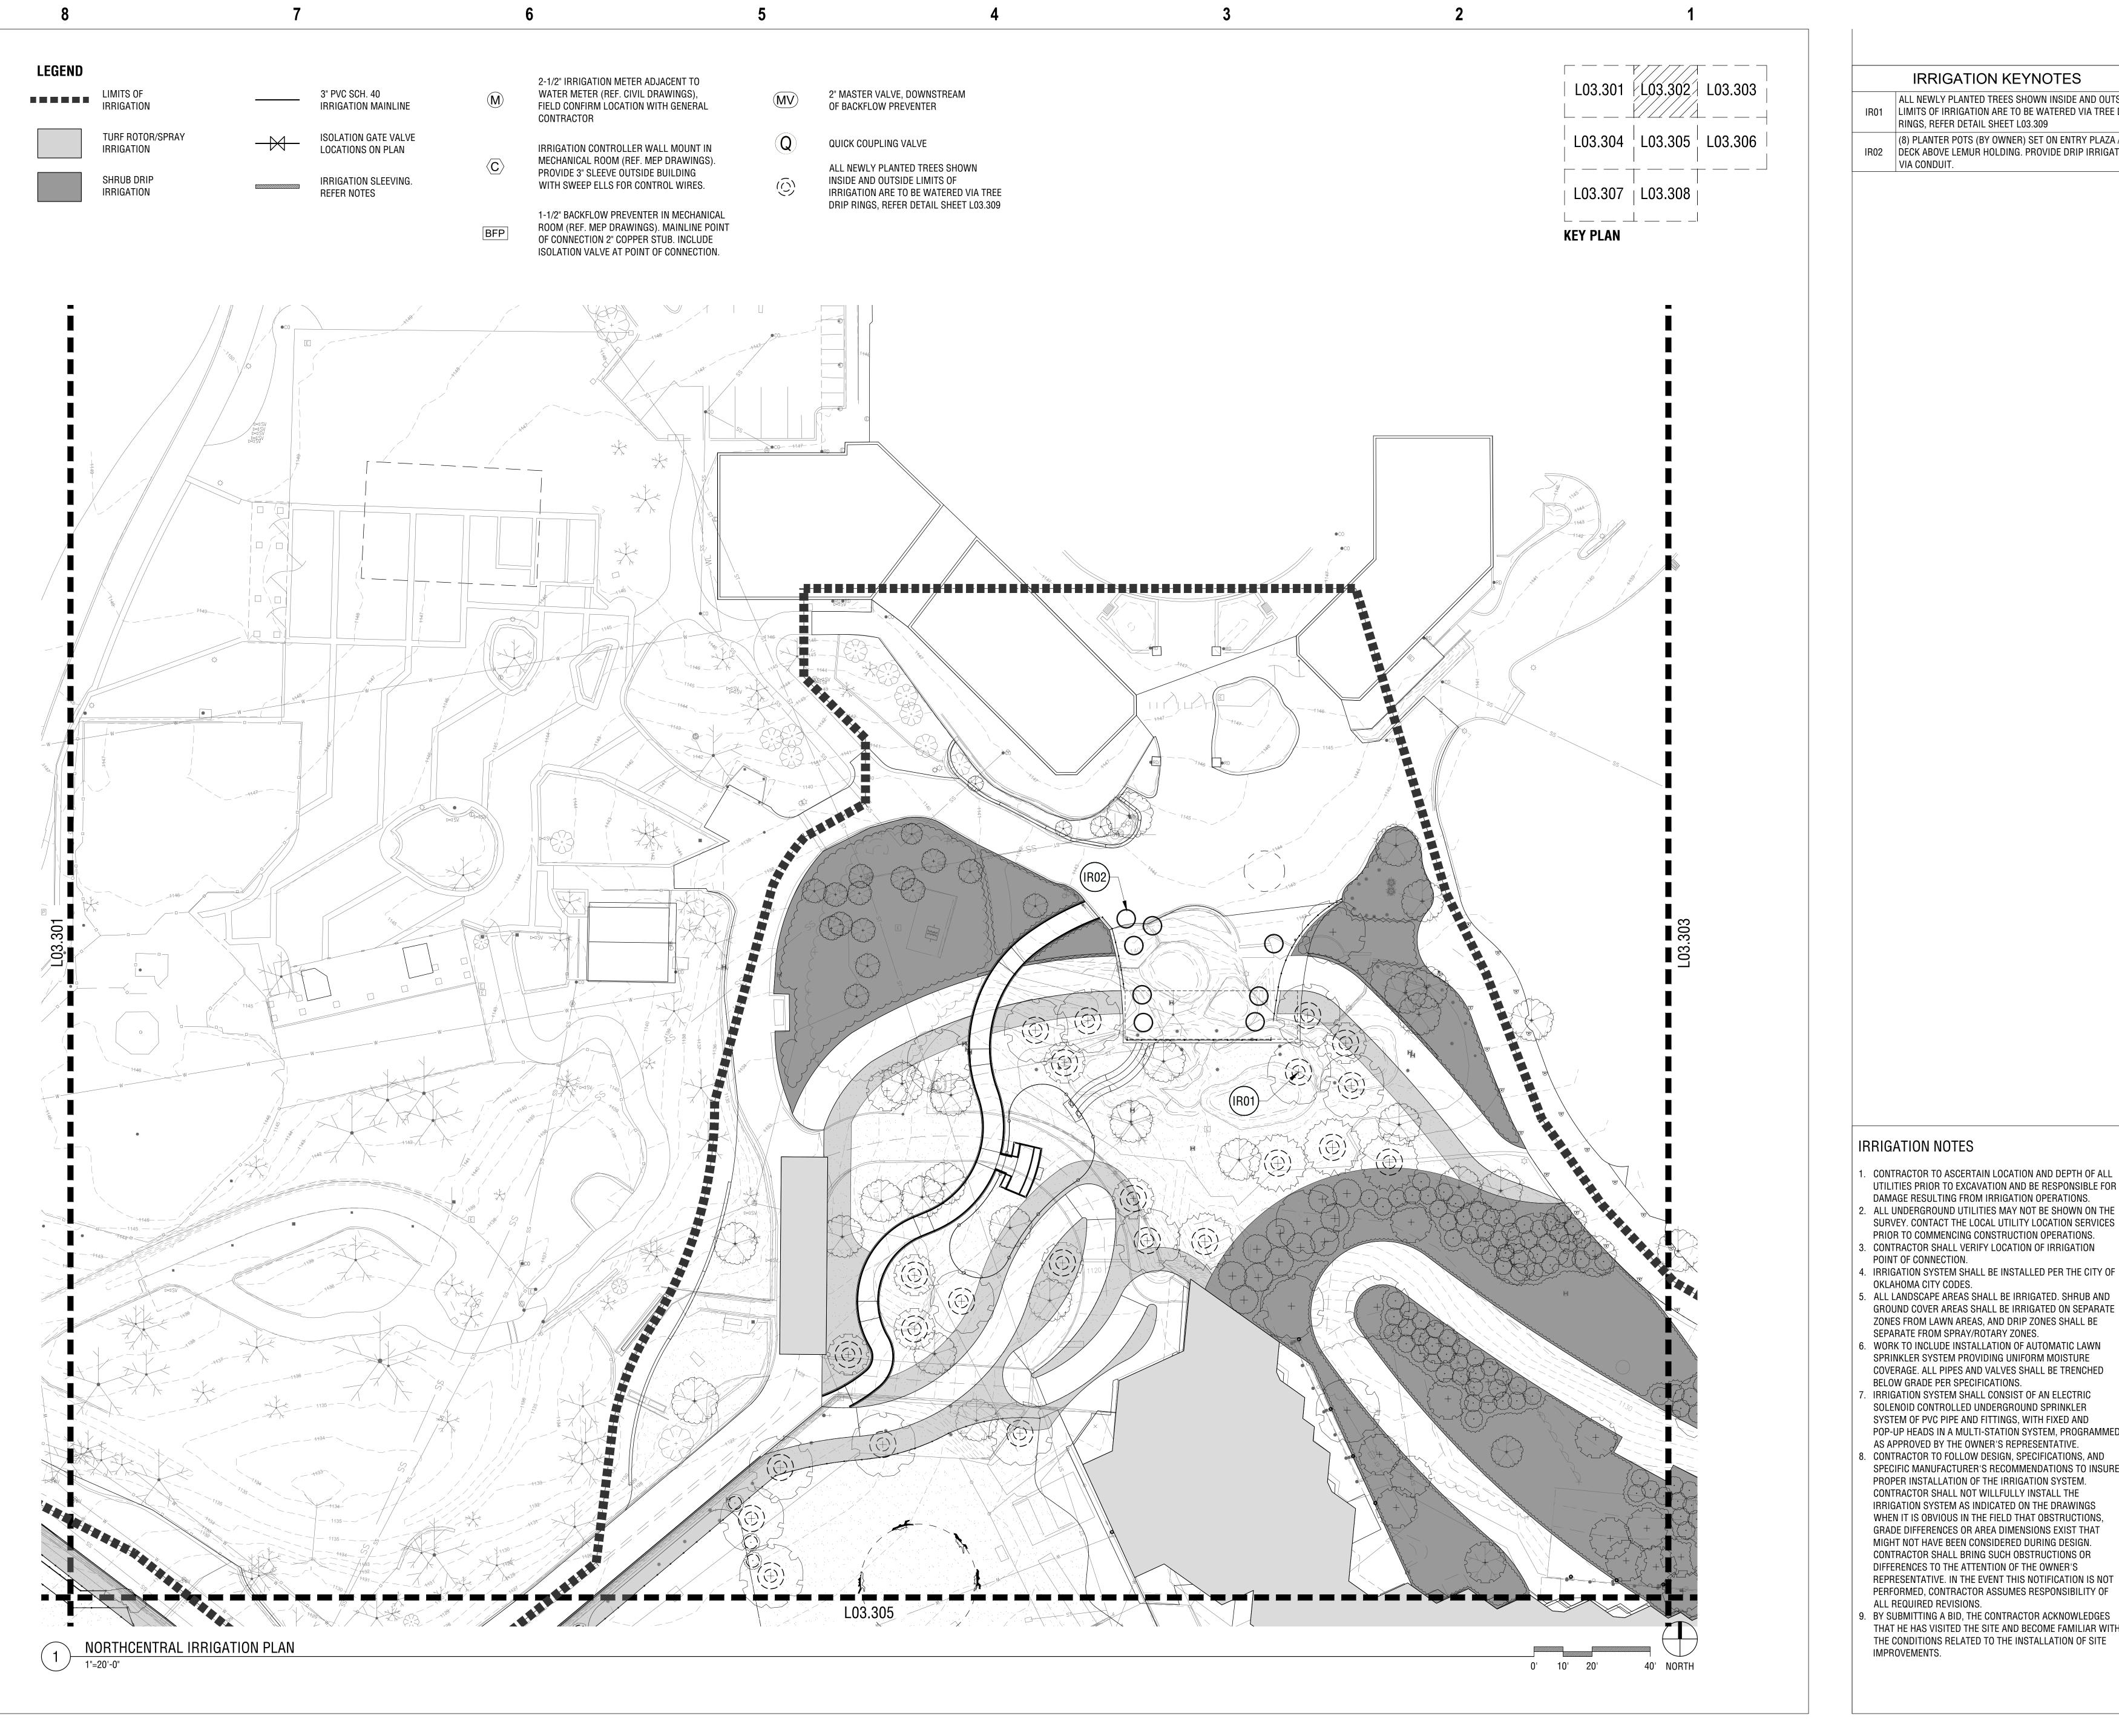

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309

(8) PLANTER POTS (BY OWNER) SET ON ENTRY PLAZA / IR02 DECK ABOVE LEMUR HOLDING. PROVIDE DRIP IRRIGATION VIA CONDUIT.



howell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Landscape Architects

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL
- PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION POINT OF CONNECTION.
- IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES. WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN
- SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED BELOW GRADE PER SPECIFICATIONS.
- IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED
- AS APPROVED BY THE OWNER'S REPRESENTATIVE 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS,
- GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE. IN THE EVENT THIS NOTIFICATION IS NOT PERFORMED, CONTRACTOR ASSUMES RESPONSIBILITY OF ALL REQUIRED REVISIONS.
- . BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE




EXHIBITS

Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A


NORTHCENTRAL IRRIGATION PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT SHEET NUMBER

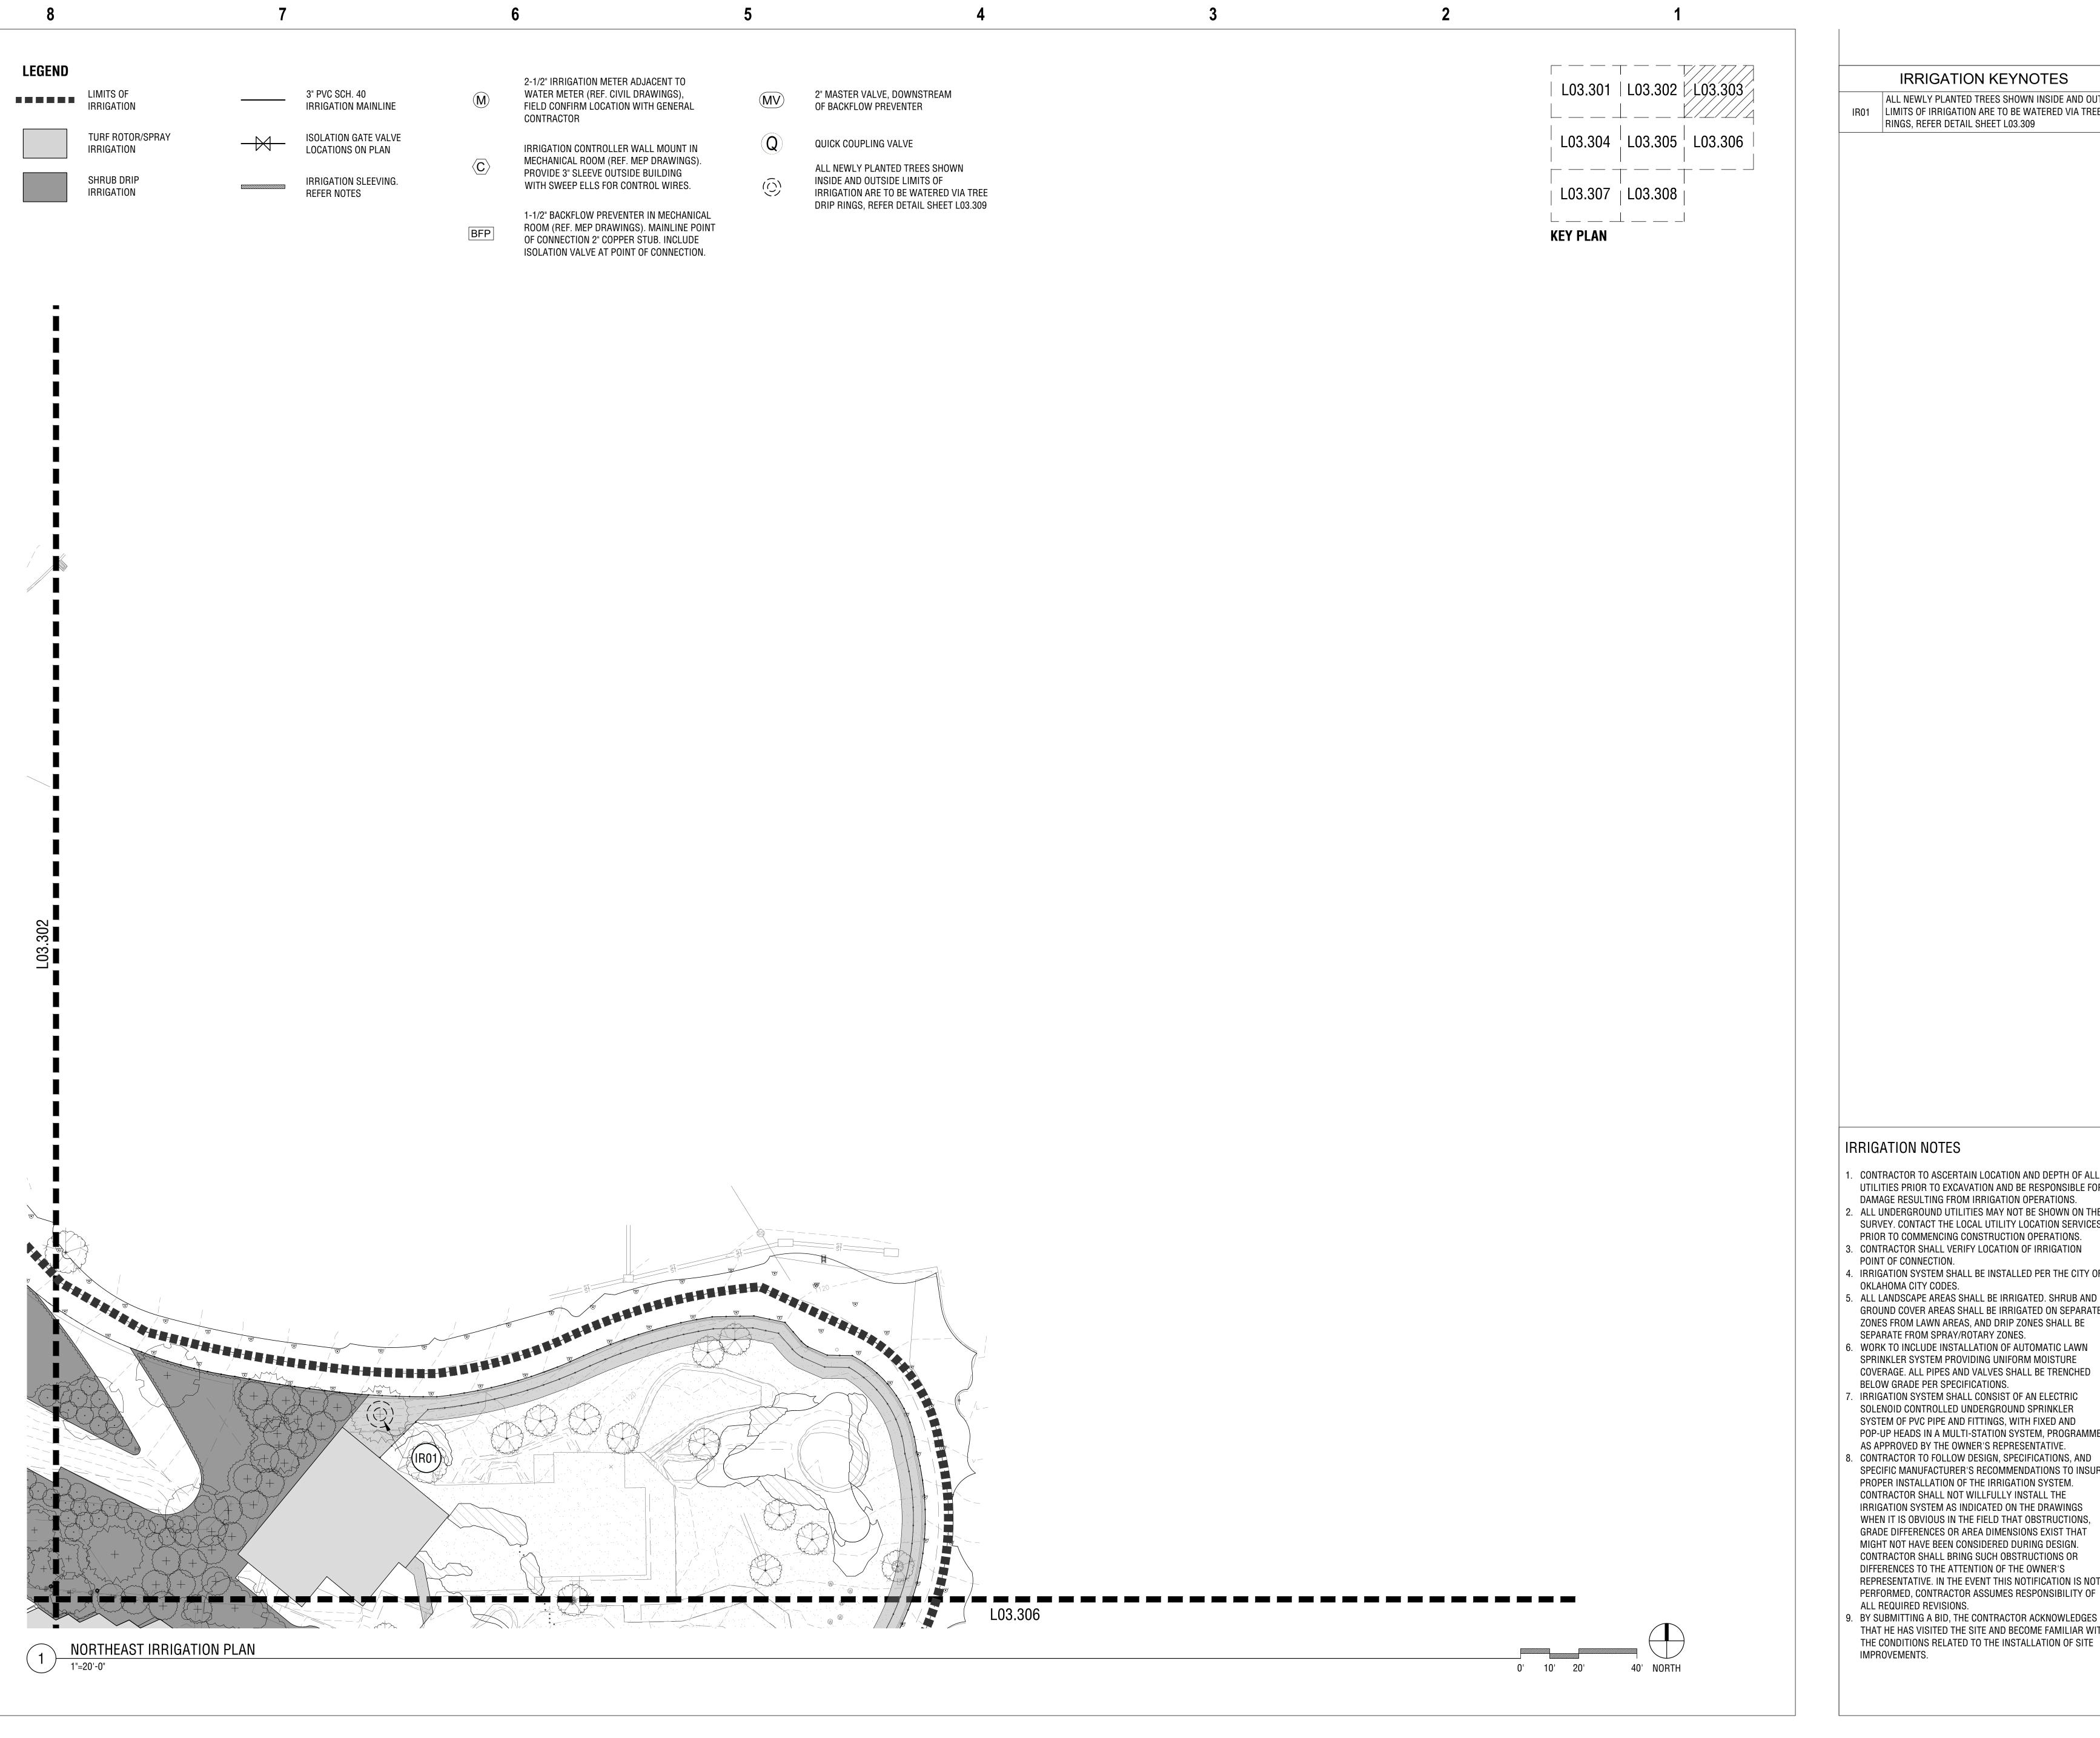

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309





Landscape Architects

howell&vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS.
- ALL UNDERGROUND UTILITIES MAY NOT BE SHOWN ON THE SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION
- POINT OF CONNECTION. IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES.
- WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED
- BELOW GRADE PER SPECIFICATIONS. IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER SYSTEM OF PVC PIPE AND FITTINGS, WITH FIXED AND POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED
- AS APPROVED BY THE OWNER'S REPRESENTATIVE. 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE. IN THE EVENT THIS NOTIFICATION IS NOT
- ALL REQUIRED REVISIONS. 9. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE



SCHEMATIC DESIGN SERVICES - TASK 1A


SAVANNAH

EXHIBITS

Oklahoma City,

NORTHEAST IRRIGATION PLAN

01/28/2020 RWR PGAV 77022-00 CLIENT SHEET NUMBER

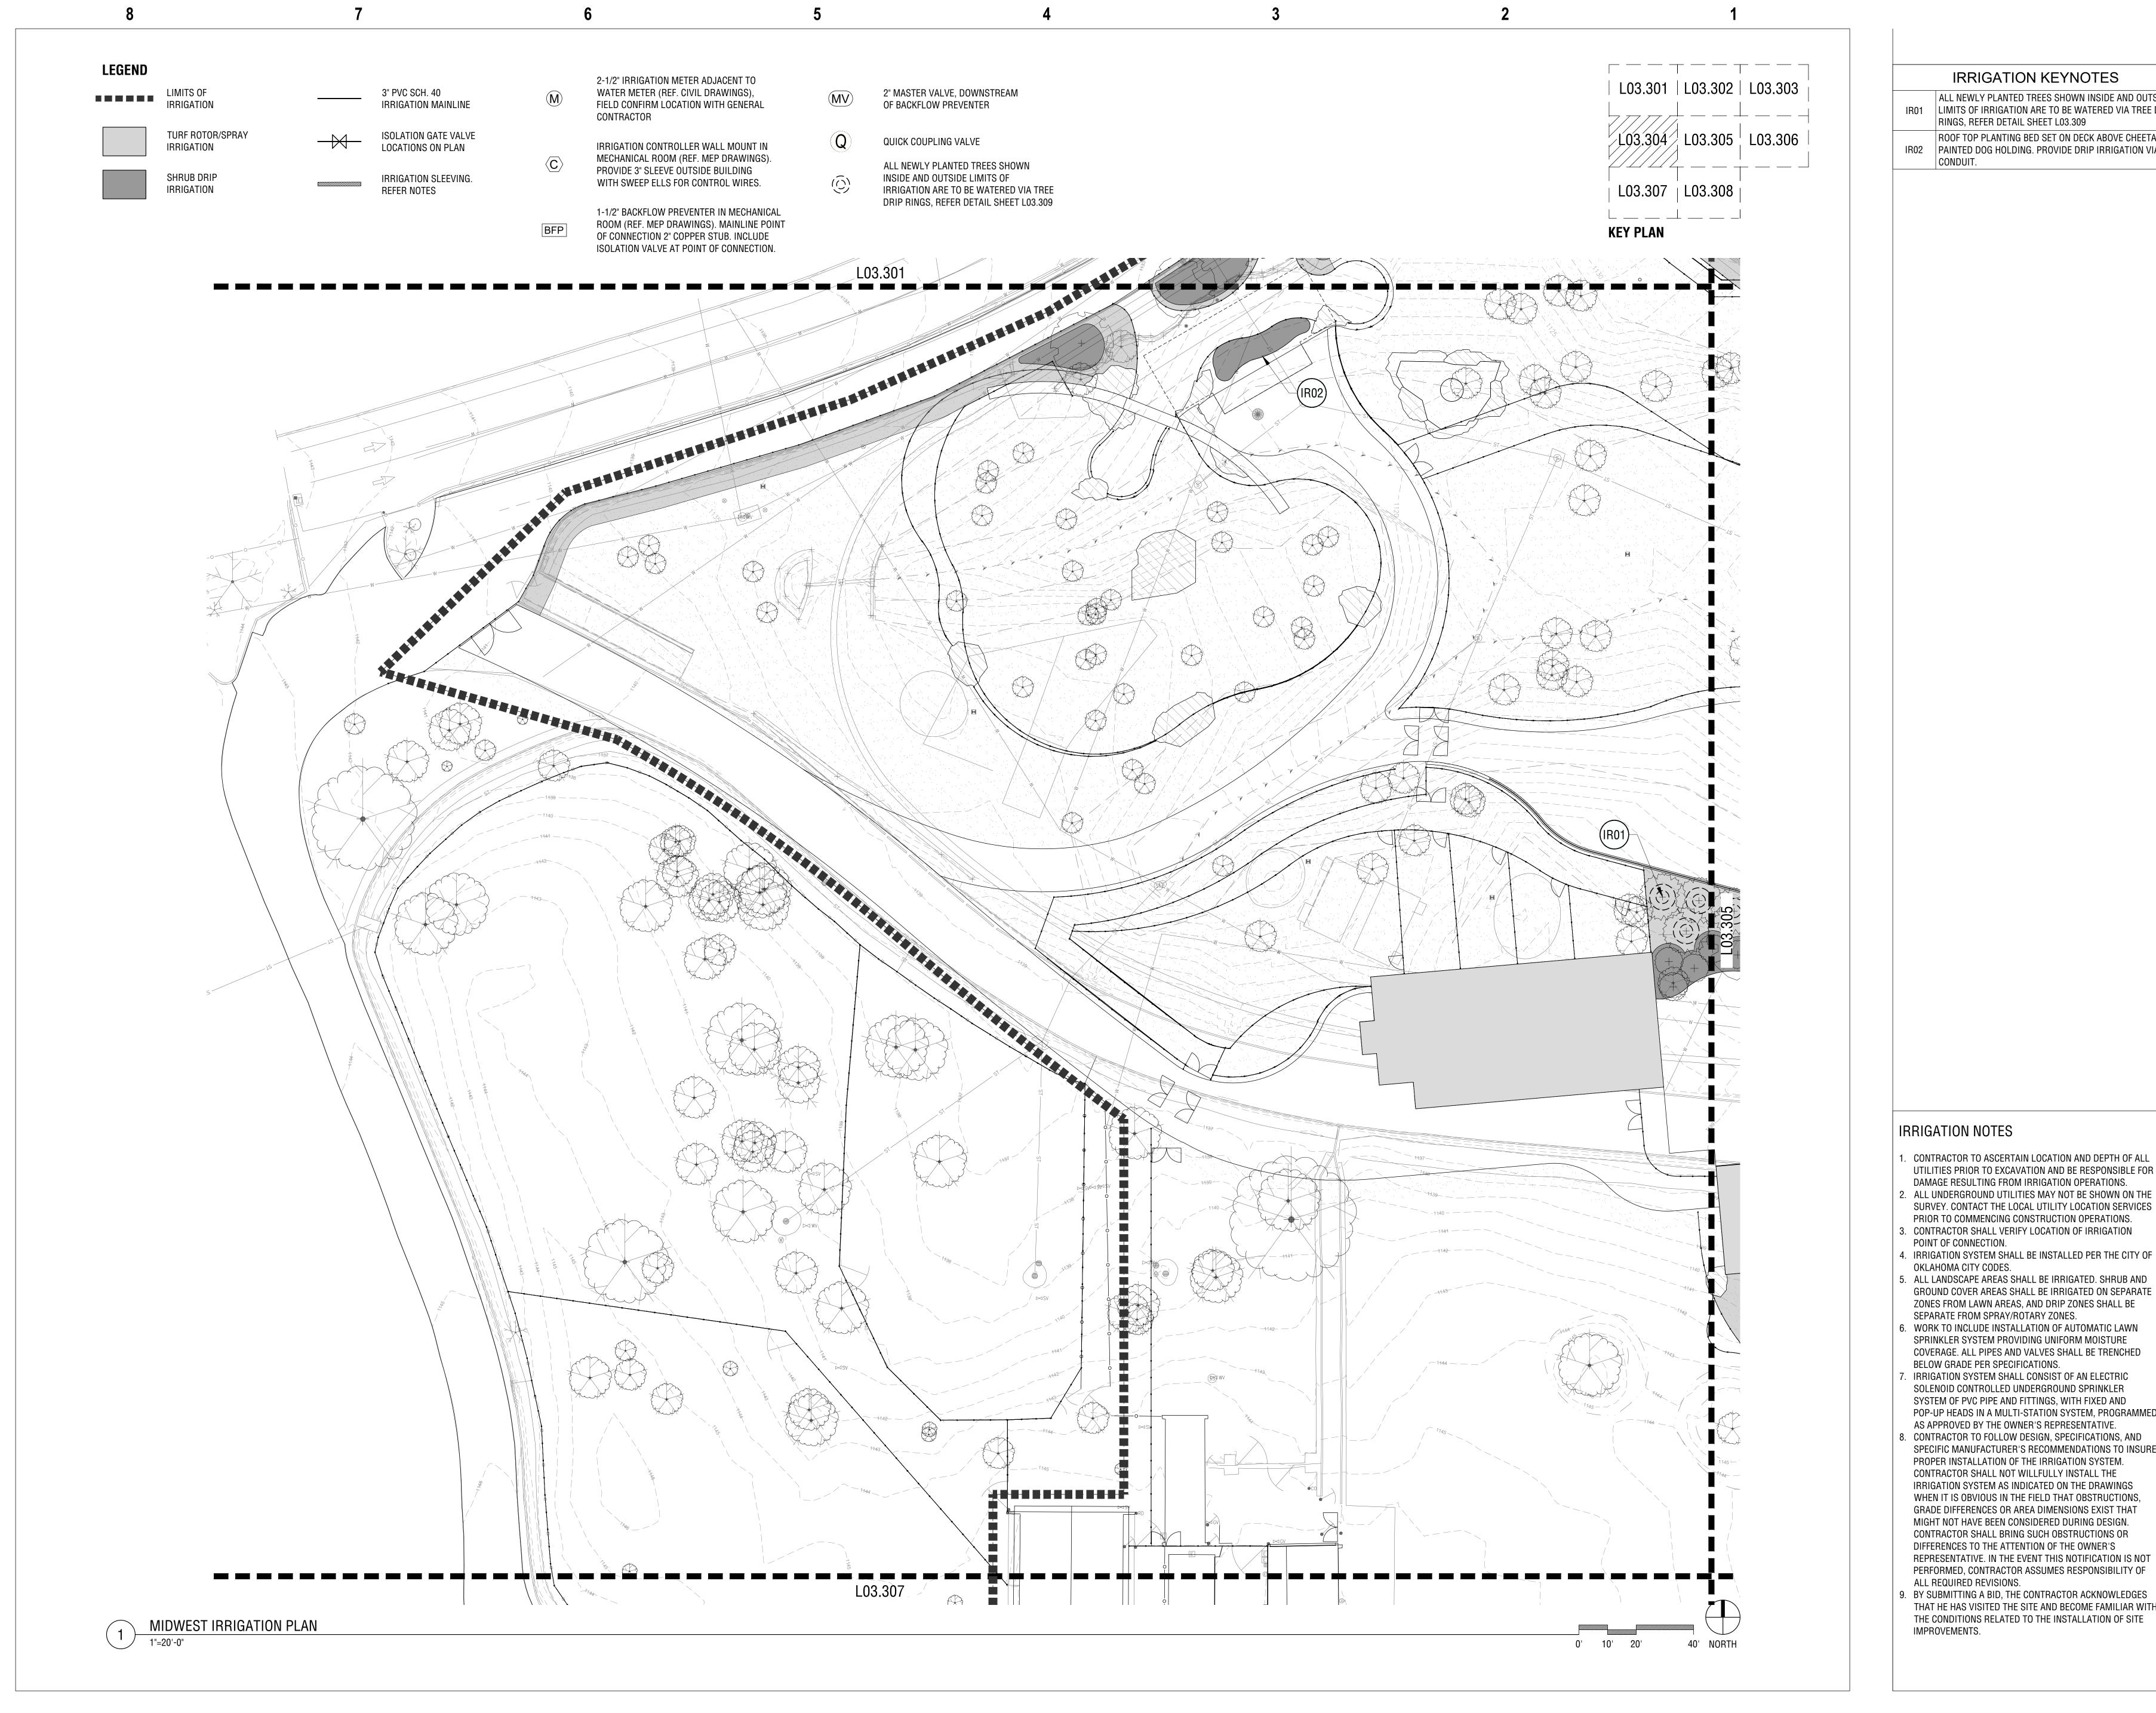

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309

ROOF TOP PLANTING BED SET ON DECK ABOVE CHEETAH / IR02 PAINTED DOG HOLDING. PROVIDE DRIP IRRIGATION VIA CONDUIT.



Landscape Architects nowell&vancurer

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howelivancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

IRRIGATION NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS. ALL UNDERGROUND UTILITIES MAY NOT BE SHOWN ON THE
- PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION POINT OF CONNECTION.
- IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES.
- . WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED
- BELOW GRADE PER SPECIFICATIONS. IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER SYSTEM OF PVC PIPE AND FITTINGS, WITH FIXED AND
- POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED AS APPROVED BY THE OWNER'S REPRESENTATIVE. 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND
- SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE. IN THE EVENT THIS NOTIFICATION IS NOT PERFORMED, CONTRACTOR ASSUMES RESPONSIBILITY OF
- ALL REQUIRED REVISIONS. . BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE

SCHEMATIC DESIGN **SERVICES - TASK 1A** MIDWEST IRRIGATION PLAN 01/28/2020

CLIENT

OKLAHOMA CITY

BOTANICAL GARDEN

Z00

ORIENTATION

PLAZA AND

AFRICA-THEMED

SAVANNAH

EXHIBITS


Oklahoma City,

L03.304

RWR

PGAV 77022-00

SHEET NUMBER

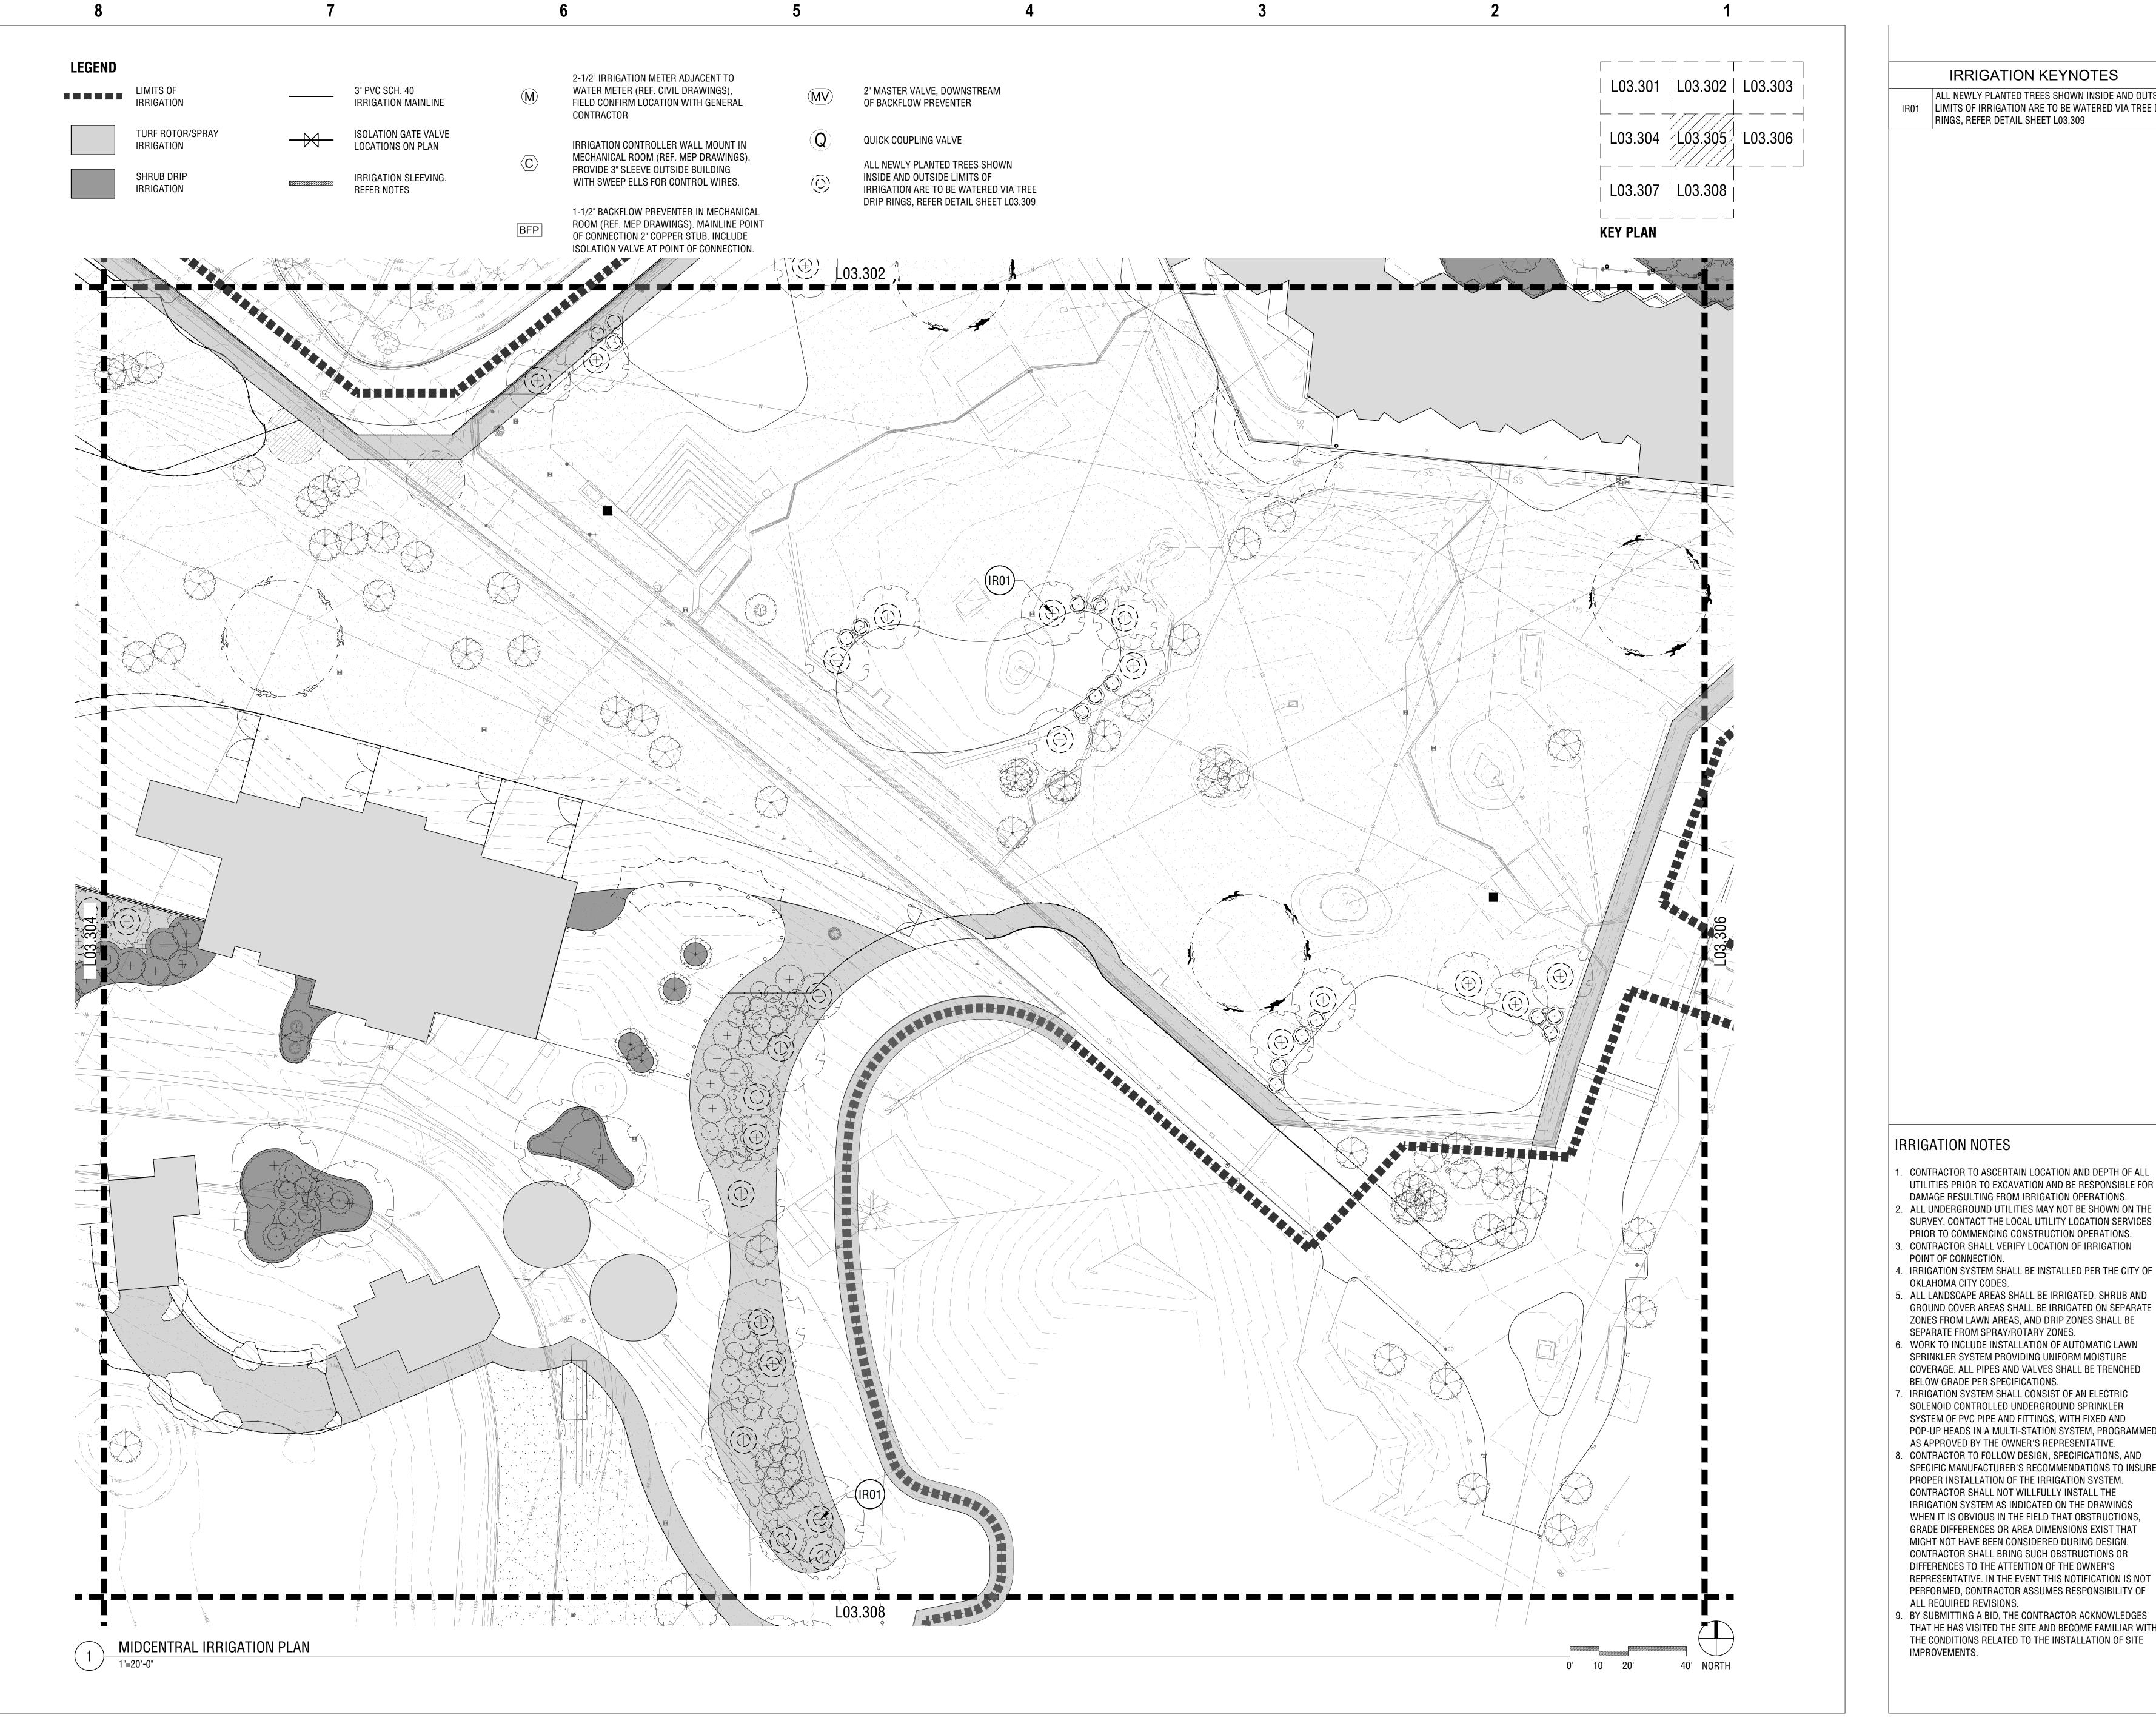

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309






Landscape Architects

nowell&vancurer 601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

IRRIGATION NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS. ALL UNDERGROUND UTILITIES MAY NOT BE SHOWN ON THE
- CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION POINT OF CONNECTION. IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF
- OKLAHOMA CITY CODES. . ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE
- SEPARATE FROM SPRAY/ROTARY ZONES. WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED
- BELOW GRADE PER SPECIFICATIONS. IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED
- AS APPROVED BY THE OWNER'S REPRESENTATIVE. 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS,
- GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE. IN THE EVENT THIS NOTIFICATION IS NOT PERFORMED, CONTRACTOR ASSUMES RESPONSIBILITY OF ALL REQUIRED REVISIONS.
- 9. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE IMPROVEMENTS.

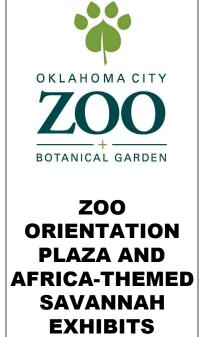


SCHEMATIC DESIGN SERVICES - TASK 1A

Oklahoma City,


MIDCENTRAL IRRIGATION PLAN 01/28/2020

RWR PGAV 77022-00 CLIENT SHEET NUMBER

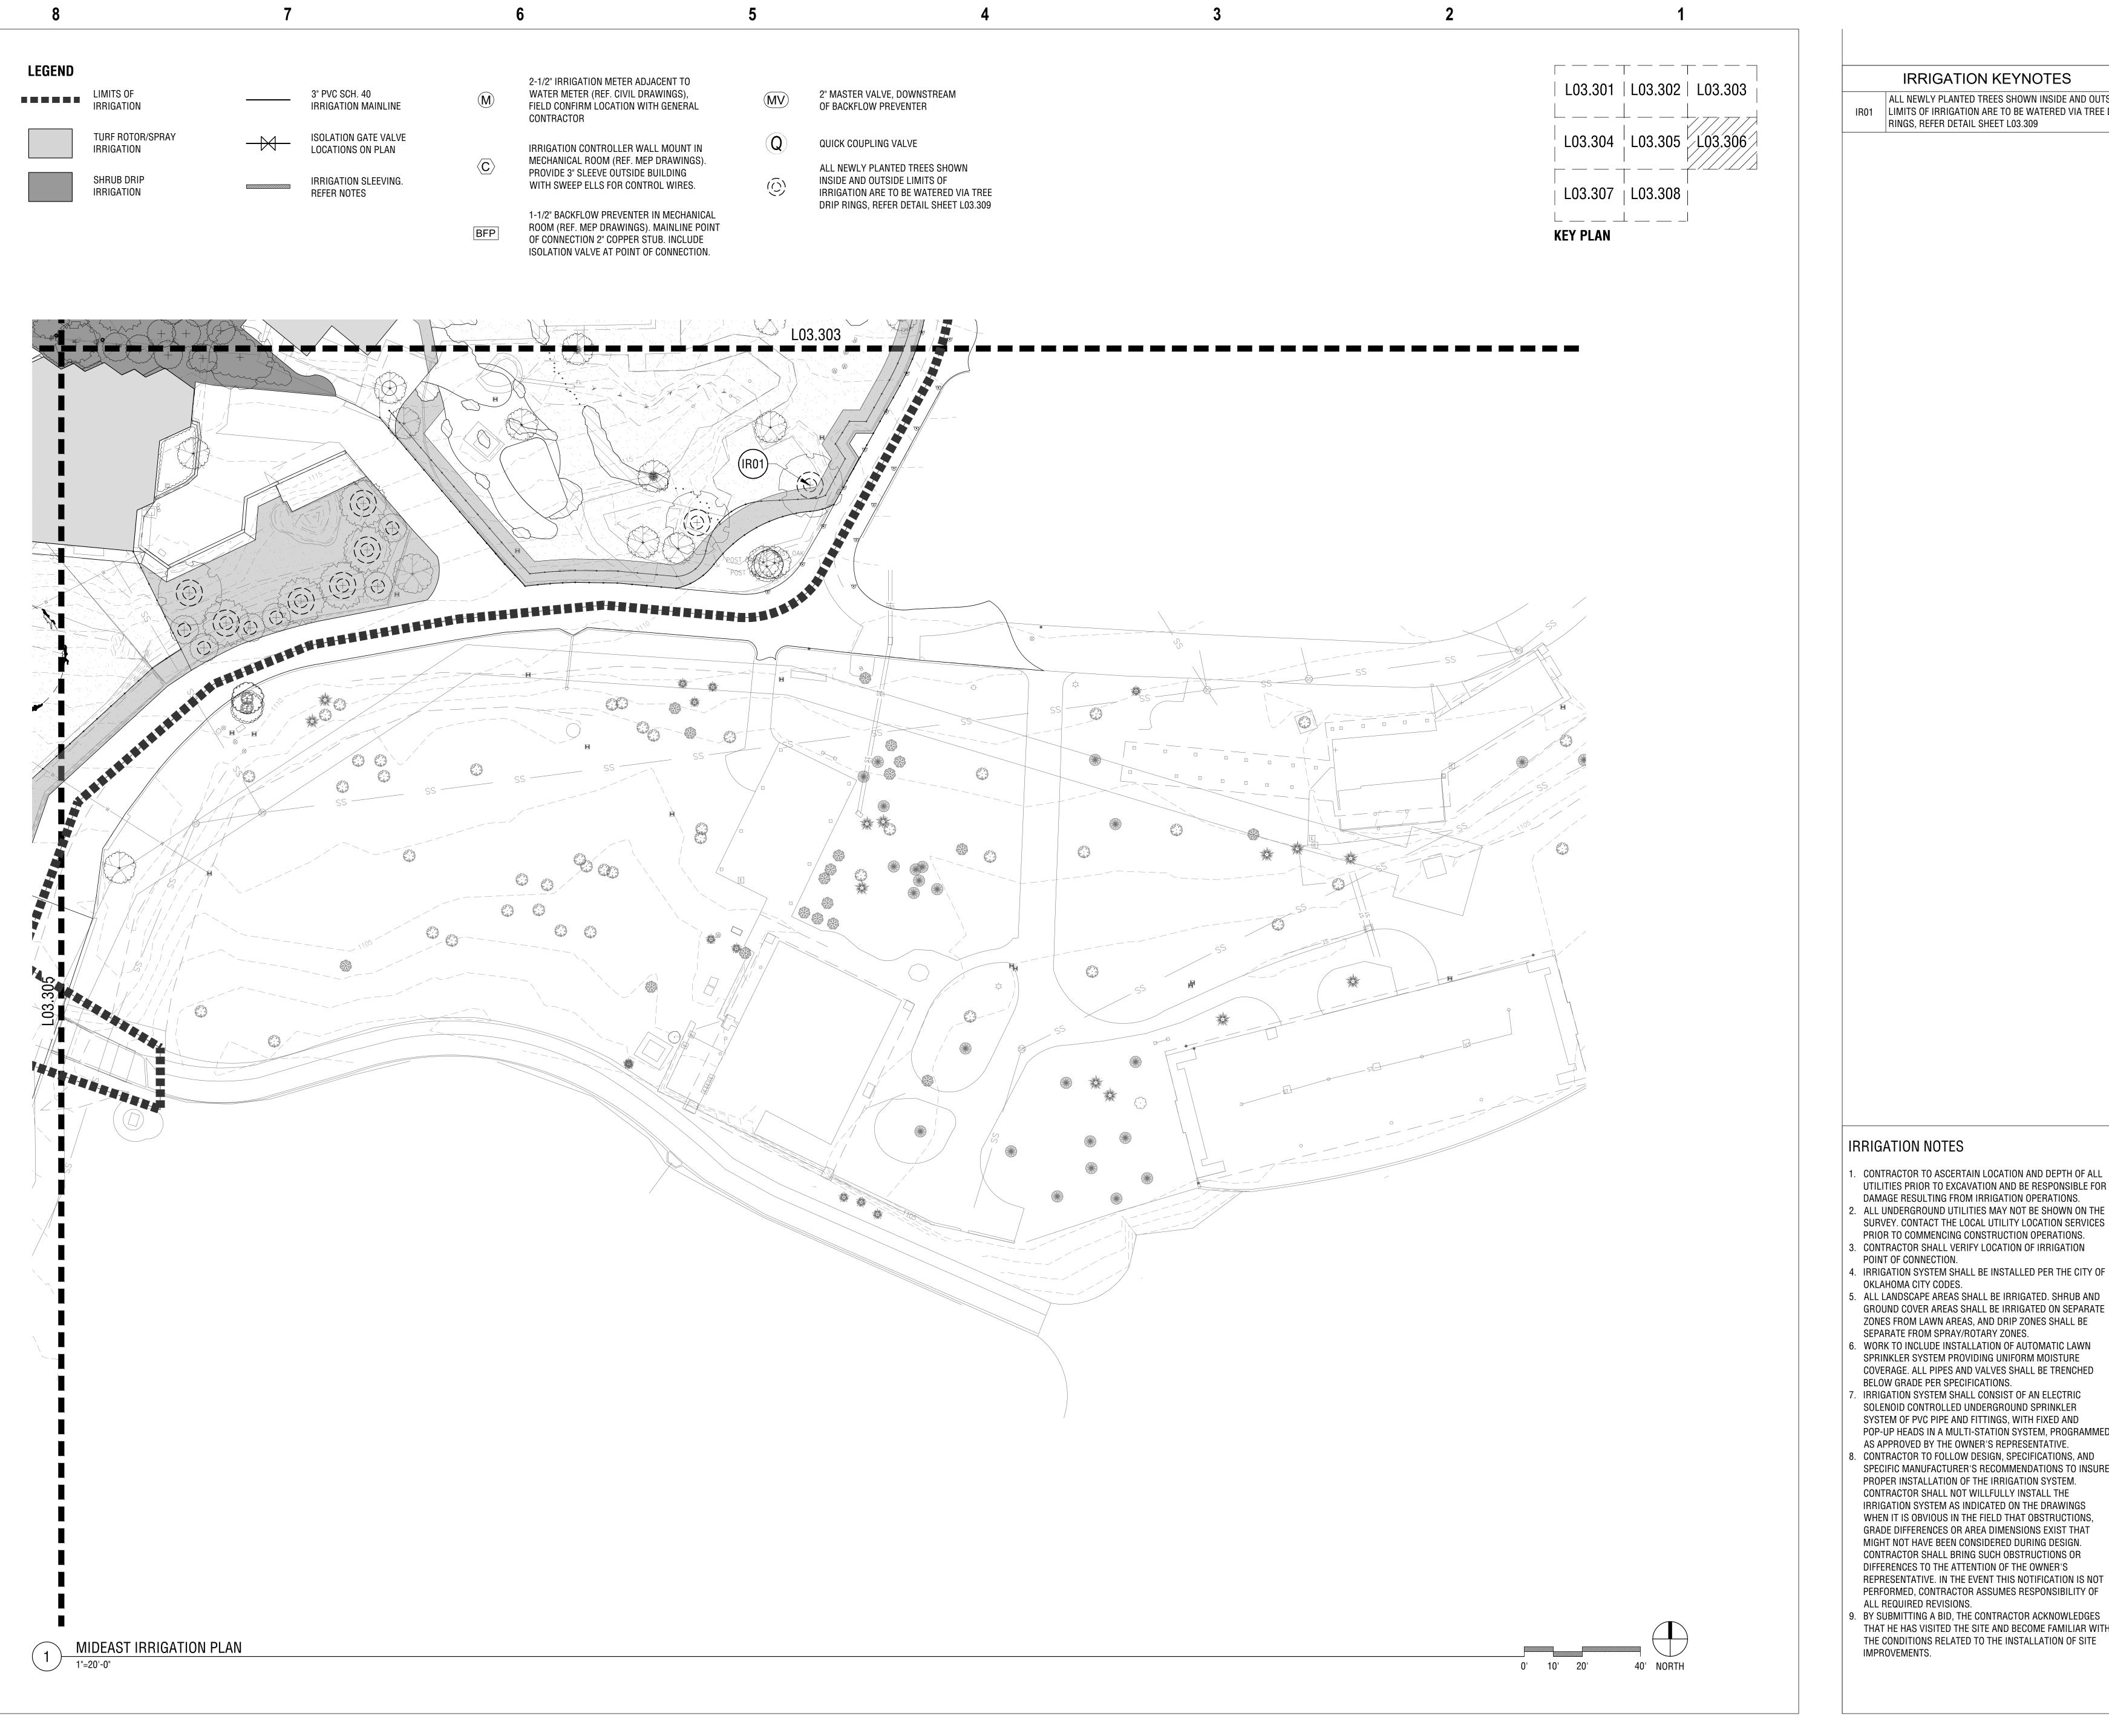

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309





Landscape Architects

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

n<u>ow</u>ell&vancuren

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS. ALL UNDERGROUND UTILITIES MAY NOT BE SHOWN ON THE
- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION
- IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES.
- . WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED
- IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED AS APPROVED BY THE OWNER'S REPRESENTATIVE.
- 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR
- ALL REQUIRED REVISIONS. 9. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE

SCHEMATIC DESIGN SERVICES - TASK 1A

OKLAHOMA CITY

BOTANICAL GARDEN

Z00

ORIENTATION

PLAZA AND

AFRICA-THEMED


SAVANNAH

EXHIBITS

Oklahoma City,


MIDEAST IRRIGATION PLAN 01/28/2020

RWR CK PGAV 77022-00 CLIENT OKCZOO SHEET NUMBER

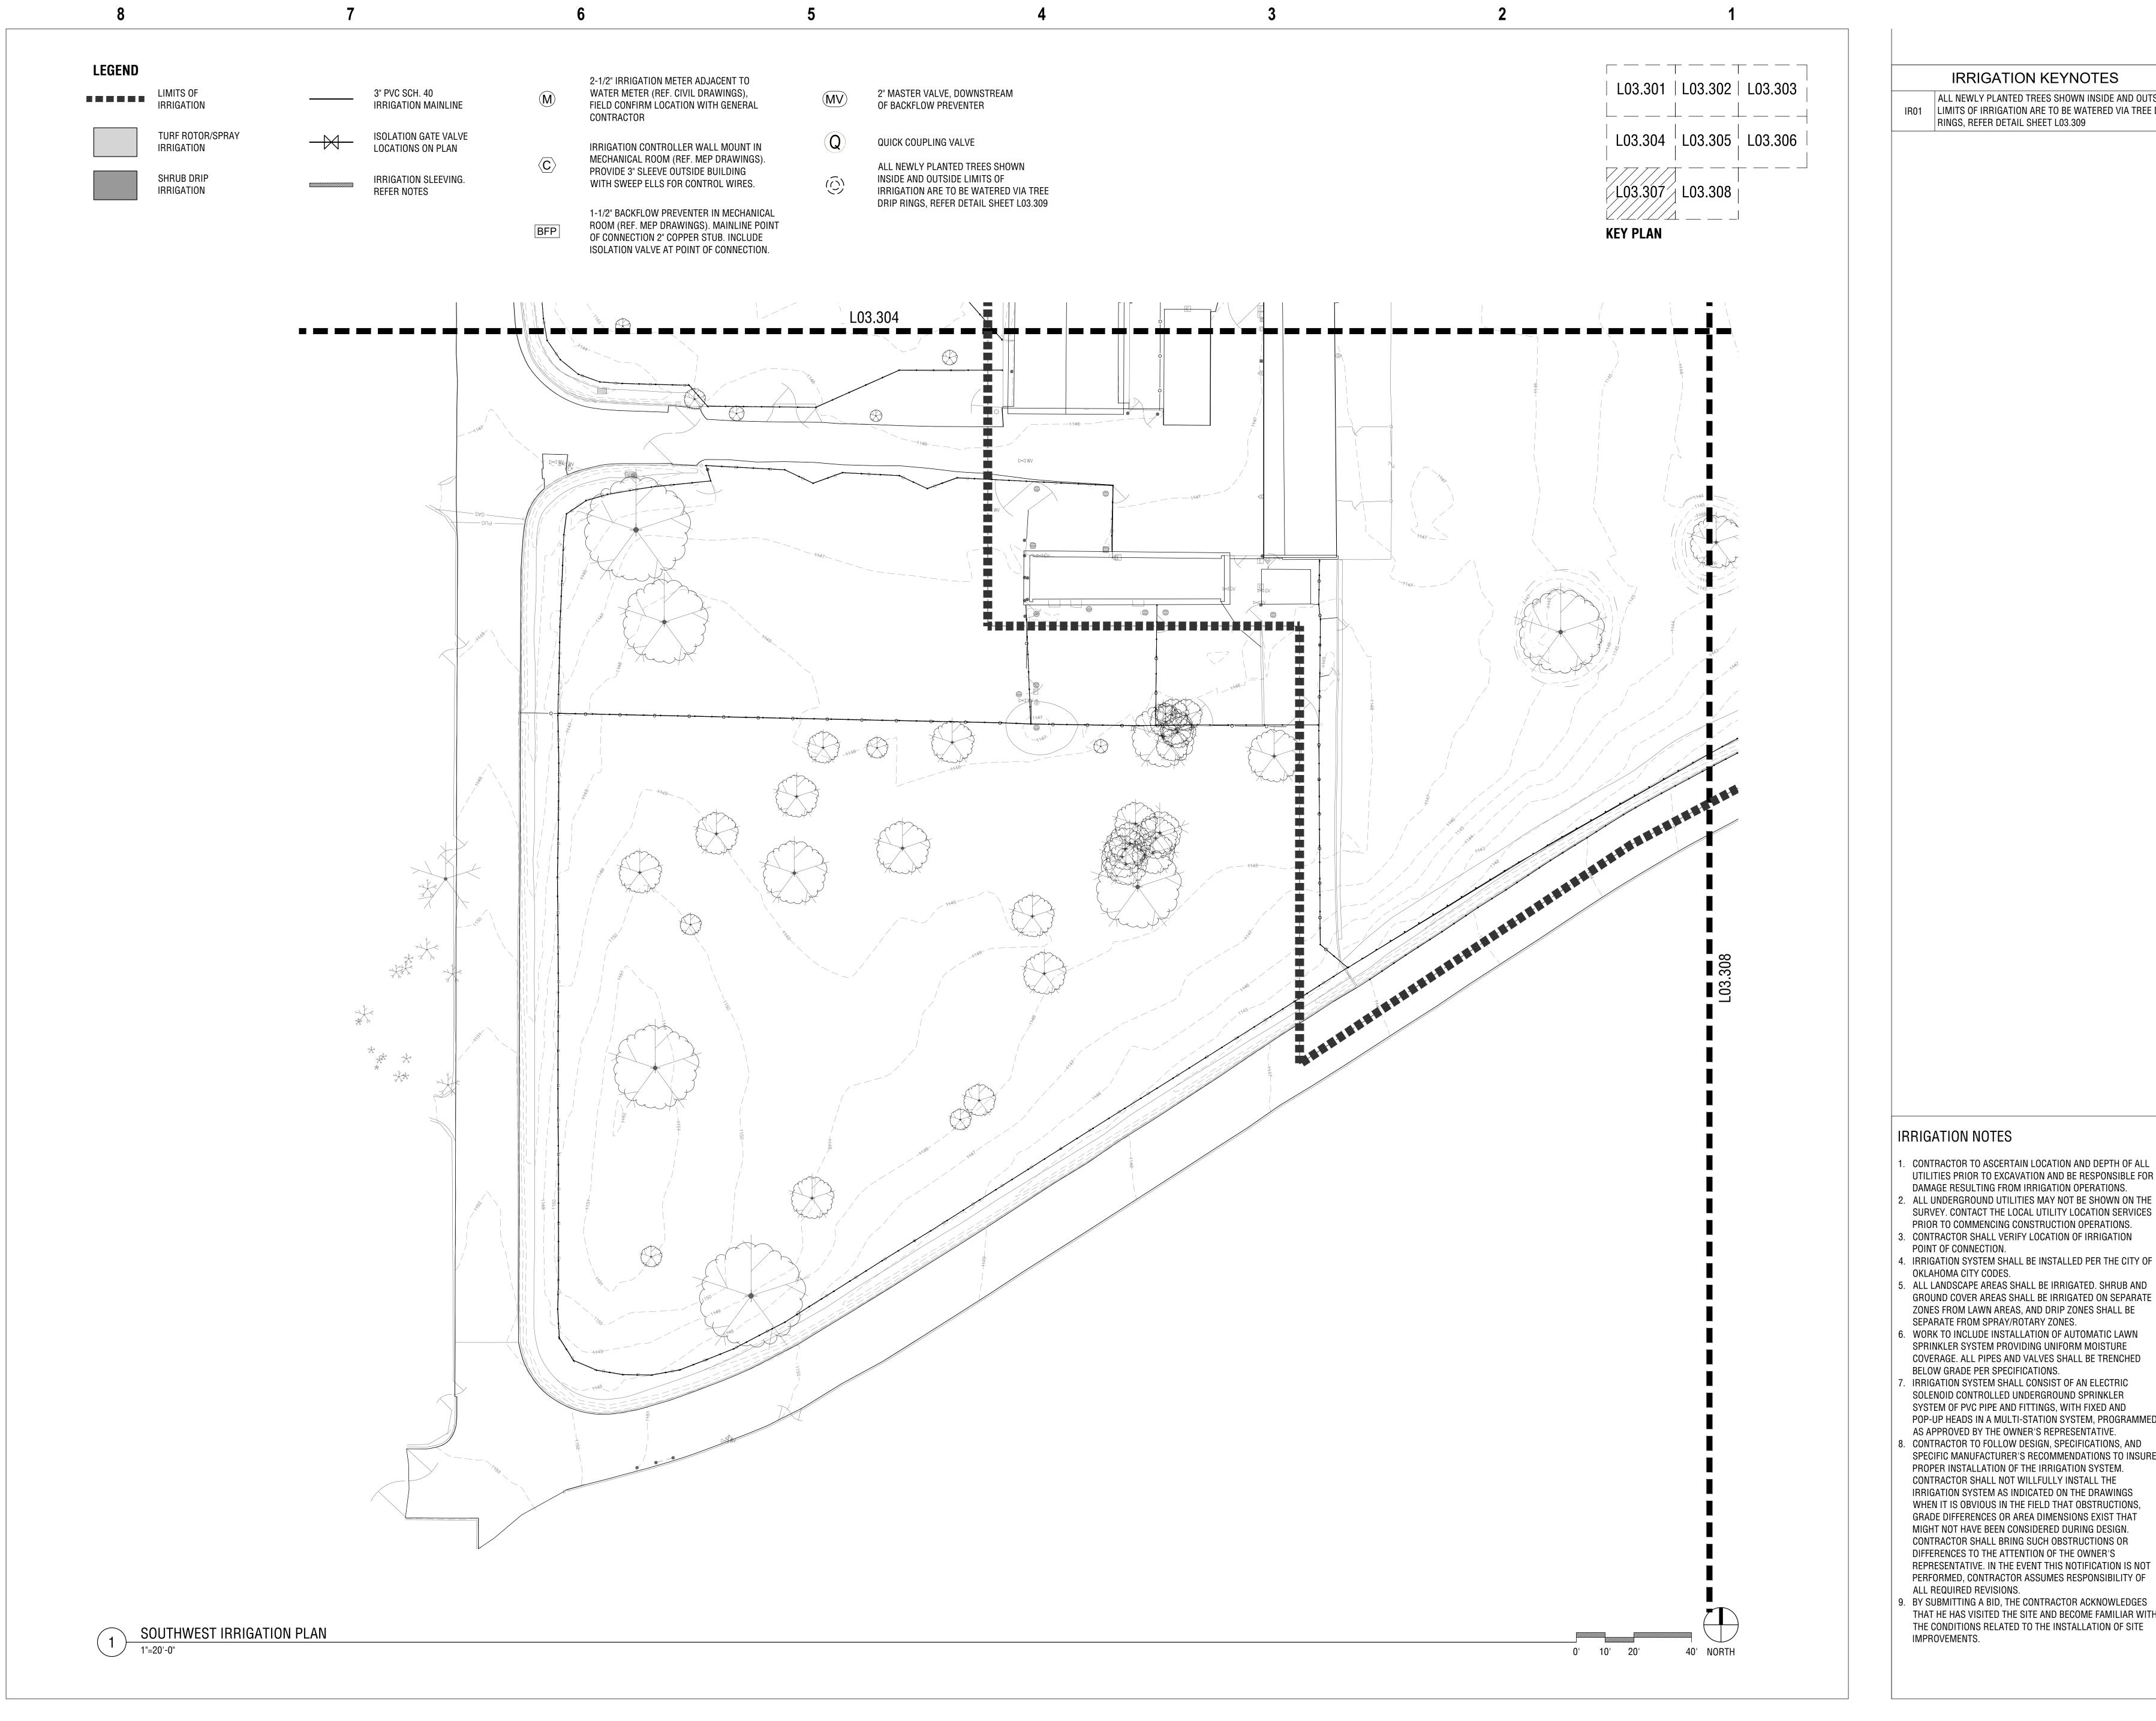

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309





Landscape Architects

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

howell&vancurer

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

IRRIGATION NOTES

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR
- PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION POINT OF CONNECTION.
- IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES. WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN
- SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED BELOW GRADE PER SPECIFICATIONS.
- IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED
- AS APPROVED BY THE OWNER'S REPRESENTATIVE 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR
- PERFORMED, CONTRACTOR ASSUMES RESPONSIBILITY OF ALL REQUIRED REVISIONS. 9. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE

Oklahoma City,

OKLAHOMA CITY

BOTANICAL GARDEN

Z00

ORIENTATION

PLAZA AND

AFRICA-THEMED

SAVANNAH


EXHIBITS

SCHEMATIC DESIGN SERVICES - TASK 1A

> SOUTHWEST IRRIGATION PLAN 01/28/2020

RWR

PGAV CLIENT OKCZOO SHEET NUMBER

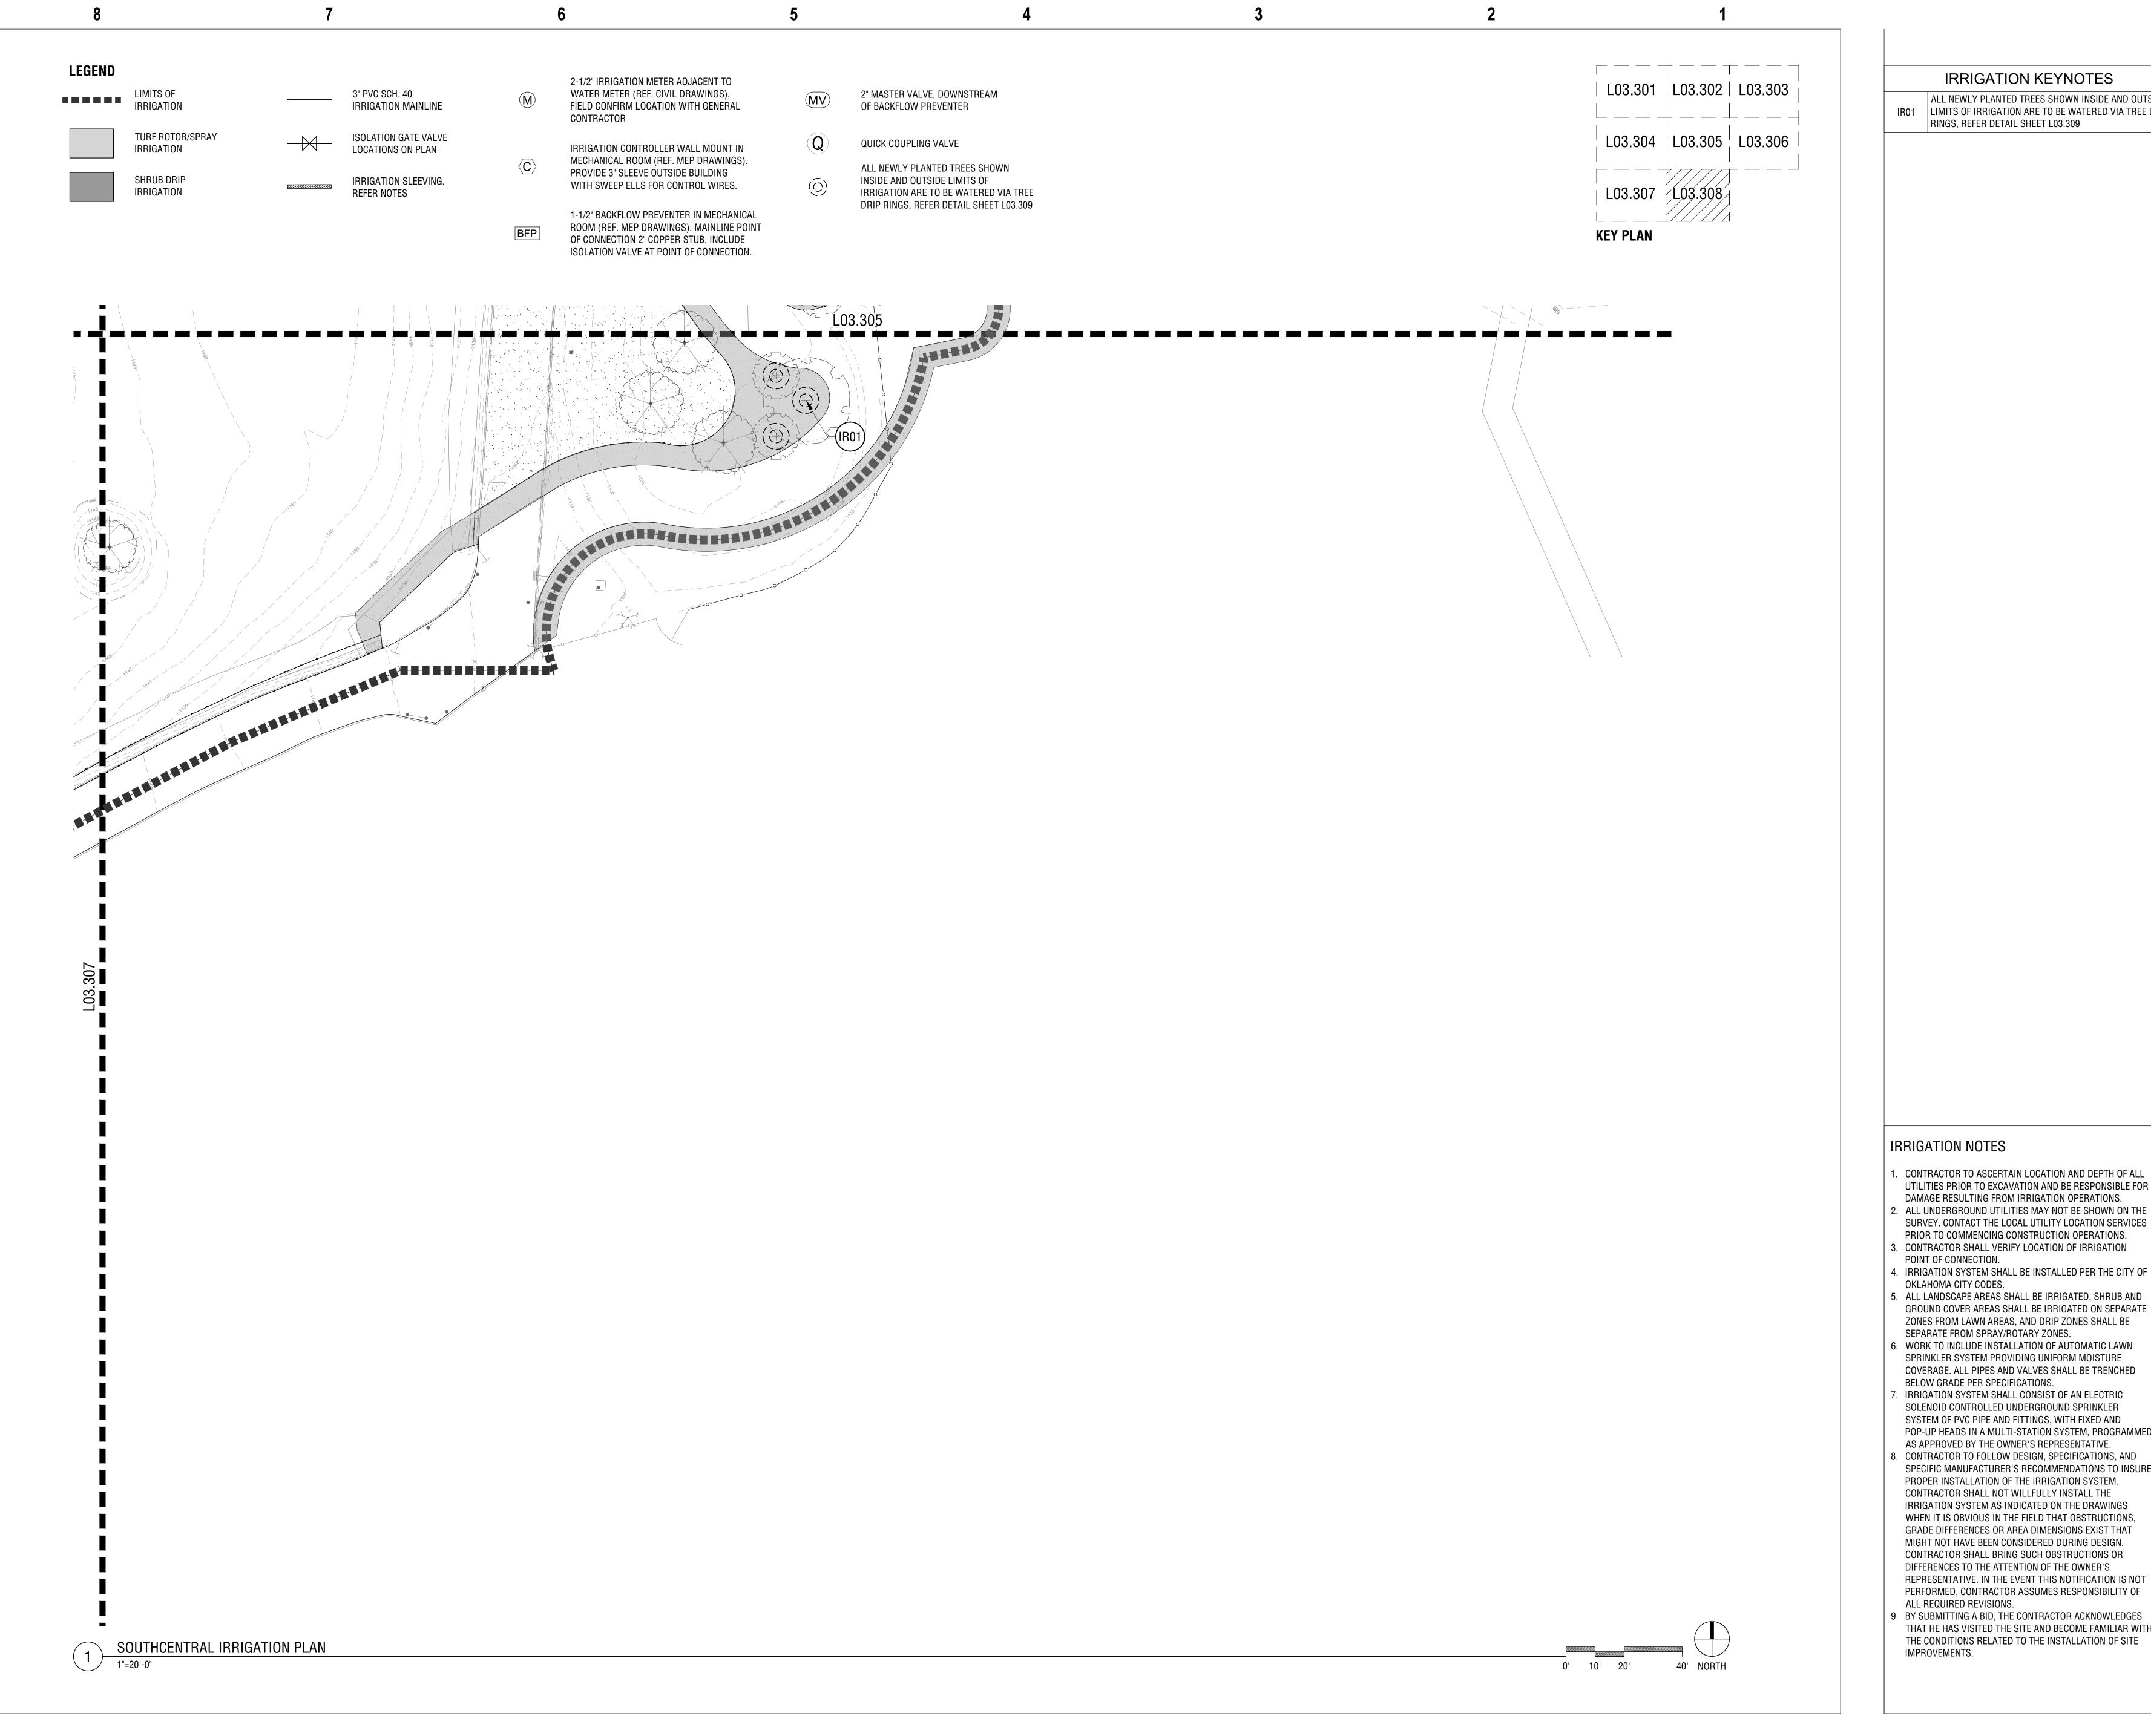

ALL NEWLY PLANTED TREES SHOWN INSIDE AND OUTSIDE IR01 LIMITS OF IRRIGATION ARE TO BE WATERED VIA TREE DRIP RINGS, REFER DETAIL SHEET L03.309





Landscape Architects

601 South Lewis Avenue Tulsa, Oklahoma 74104 918.592.1270 phone howellvancuren.com

howell&vancurer

This drawing contains layouts and elements critical to providing Access for Disabled
Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

Accessibility for Persons with Disabilities:

- CONTRACTOR TO ASCERTAIN LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO EXCAVATION AND BE RESPONSIBLE FOR DAMAGE RESULTING FROM IRRIGATION OPERATIONS.
- SURVEY. CONTACT THE LOCAL UTILITY LOCATION SERVICES PRIOR TO COMMENCING CONSTRUCTION OPERATIONS. 3. CONTRACTOR SHALL VERIFY LOCATION OF IRRIGATION
- POINT OF CONNECTION. IRRIGATION SYSTEM SHALL BE INSTALLED PER THE CITY OF OKLAHOMA CITY CODES.
- . ALL LANDSCAPE AREAS SHALL BE IRRIGATED. SHRUB AND GROUND COVER AREAS SHALL BE IRRIGATED ON SEPARATE ZONES FROM LAWN AREAS, AND DRIP ZONES SHALL BE SEPARATE FROM SPRAY/ROTARY ZONES.
- . WORK TO INCLUDE INSTALLATION OF AUTOMATIC LAWN SPRINKLER SYSTEM PROVIDING UNIFORM MOISTURE COVERAGE. ALL PIPES AND VALVES SHALL BE TRENCHED
- BELOW GRADE PER SPECIFICATIONS. IRRIGATION SYSTEM SHALL CONSIST OF AN ELECTRIC SOLENOID CONTROLLED UNDERGROUND SPRINKLER SYSTEM OF PVC PIPE AND FITTINGS, WITH FIXED AND POP-UP HEADS IN A MULTI-STATION SYSTEM, PROGRAMMED
- 8. CONTRACTOR TO FOLLOW DESIGN, SPECIFICATIONS, AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS TO INSURE PROPER INSTALLATION OF THE IRRIGATION SYSTEM. CONTRACTOR SHALL NOT WILLFULLY INSTALL THE IRRIGATION SYSTEM AS INDICATED ON THE DRAWINGS WHEN IT IS OBVIOUS IN THE FIELD THAT OBSTRUCTIONS, GRADE DIFFERENCES OR AREA DIMENSIONS EXIST THAT MIGHT NOT HAVE BEEN CONSIDERED DURING DESIGN. CONTRACTOR SHALL BRING SUCH OBSTRUCTIONS OR DIFFERENCES TO THE ATTENTION OF THE OWNER'S
- ALL REQUIRED REVISIONS. 9. BY SUBMITTING A BID, THE CONTRACTOR ACKNOWLEDGES THAT HE HAS VISITED THE SITE AND BECOME FAMILIAR WITH THE CONDITIONS RELATED TO THE INSTALLATION OF SITE



PLAZA AND

AFRICA-THEMED

SAVANNAH


EXHIBITS


Oklahoma City,

SCHEMATIC DESIGN SERVICES - TASK 1A


SOUTHCENTRAL IRRIGATION PLAN

01/28/2020 RWR CK PGAV 77022-00 CLIENT OKCZOO SHEET NUMBER

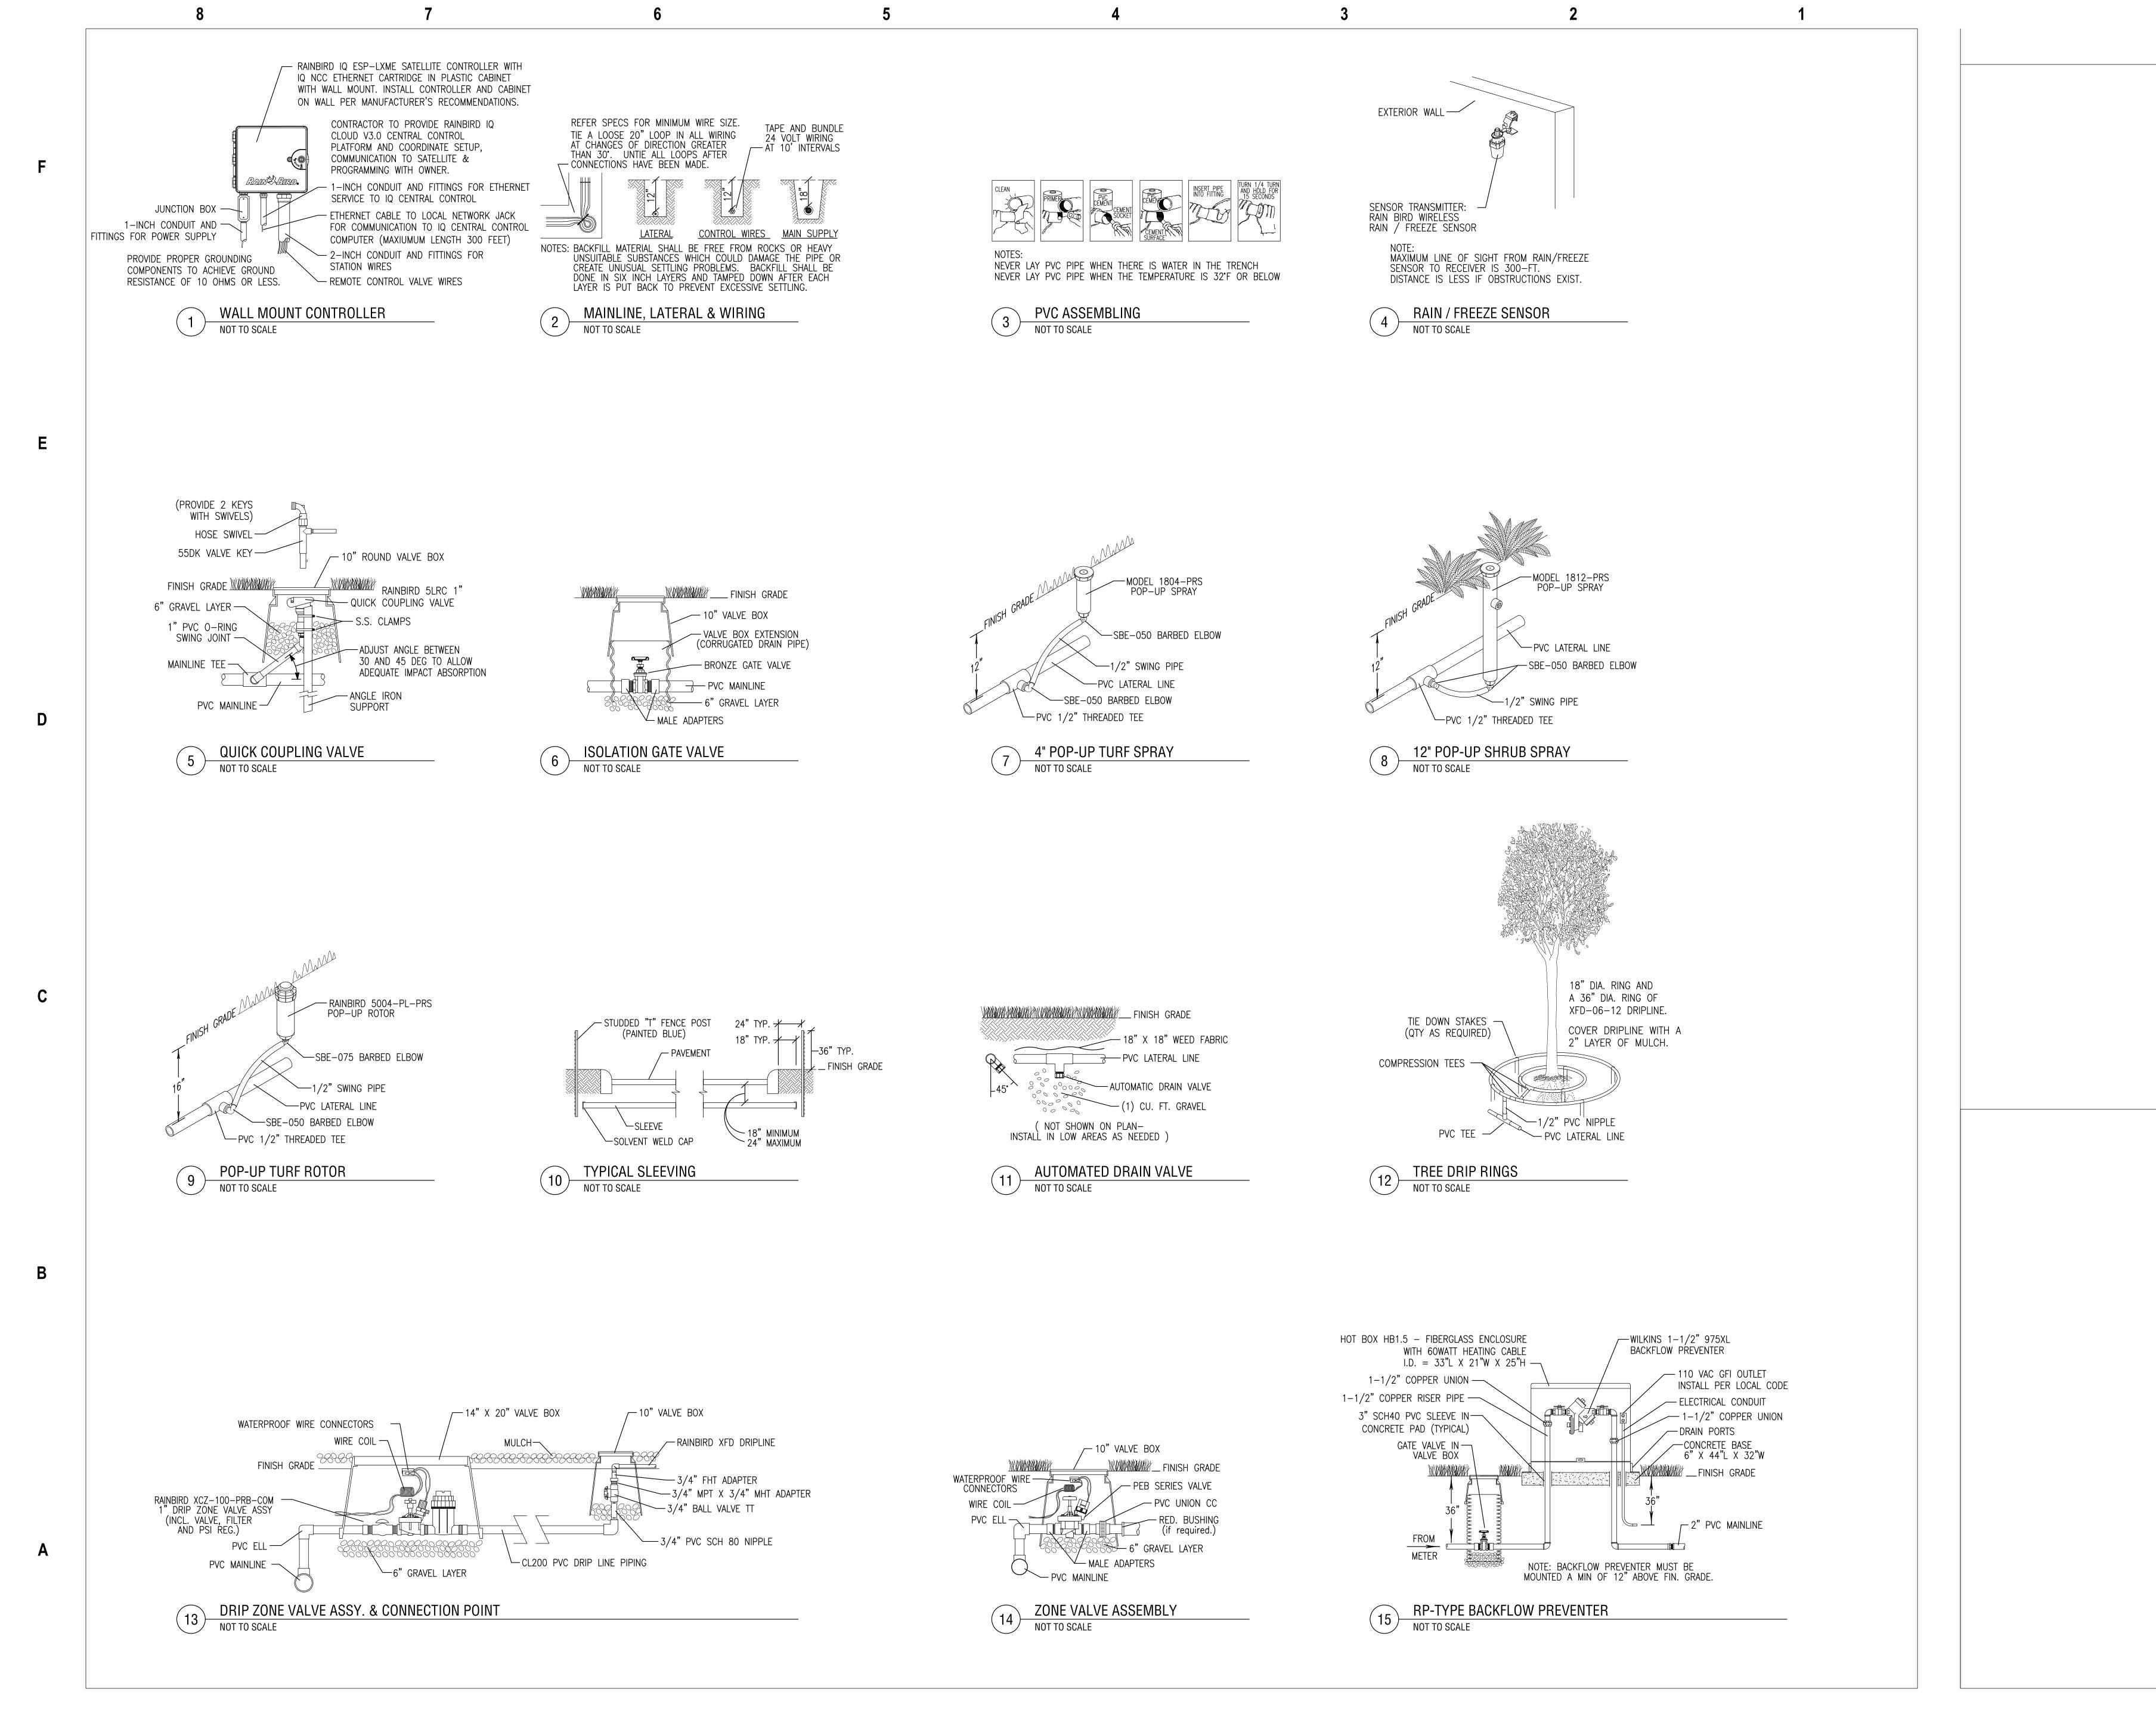

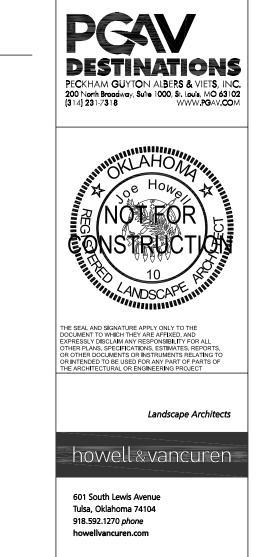

Accessibility for Persons with Disabilities: This drawing contains layouts and elements critical to providing Access for Disabled Persons. Contractor shall provide verification and certification of Compliance with the applicable accessibility regulations.

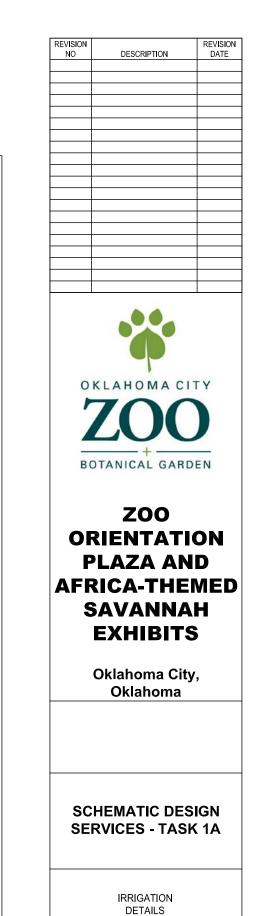

01/28/2020

L03.309

CLIENT

RWR

SHEET NUMBER

77022-00